

## ASSIGNMENT 4

Date	4 Nov 22
Name	Anupriya D
Team ID	PNT2022TMID38288
Project Name	GAS LEAKAGE MONITORING AND ALERTING SYSTEM FOR INDUSTRIES

### QUESTION :

Write code and connection in wovki for ultrasonic sensor. Whenever distance is less than 100 cms send “alert” to IBM cloud and display in device recent events

### CODE :

```
#include <WiFi.h> //library for wifi
#include <PubSubClient.h> //library for MQTT
WiFiClient wifiClient;
String data3;
#define ORG "4v8e6i"

#define DEVICE_TYPE "NodeMCU"
#define DEVICE_ID "12345"
#define TOKEN "12345678"

#define speed 0.034 #define led
14
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/ NodeMCU /fmt/json"; char
topic[] = "iot-2/cmd/event_1/fmt/String"; char authMethod[] =
"use-token-auth"; char token[] = TOKEN; char clientId[]
= "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; PubSubClient
client(server, 1883, wifiClient);

const int trigpin=5; const
int echopin=18;
String command;
String data="";
long
```

```

duration; float
dist; void
setup()
{
  Serial.begin(115200);
  pinMode(led, OUTPUT);
  pinMode(trigpin, OUTPUT);
  pinMode(echopin, INPUT);
  wifiConnect(); mqttConnect();
} void loop(){ bool
isNearby = dist < 100;
digitalWrite(led, isNearby);
publishData();
delay(500);
if
(!client.loop()){ mqttConnect();
} }
void wifiConnect(){
  Serial.print("Connecting to "); Serial.print("Wifi");
  WiFi.begin("Wokwi-GUEST", "", 6); while
  (WiFi.status() != WL_CONNECTED){ delay(500);
    Serial.print(".");
  }
  Serial.print("WiFi connected, IP address: ");
  Serial.println(WiFi.localIP());
} void mqttConnect(){ if (!client.connected()){
  Serial.print("Reconnecting MQTT client to "); Serial.println(server);
while (!client.connect(clientId, authMethod, token)){
  Serial.print("."); delay(500);
  }
  initManagedDevice(); Serial.println();
}
} void initManagedDevice() { if
(client.subscribe(topic)){
  // Serial.println(client.subscribe(topic));
  Serial.println("IBM subscribe to cmd OK");
} else{
  Serial.println("subscribe to cmd FAILED");
}
} void publishData(){
digitalWrite(trigpin, LOW);
digitalWrite(trigpin, HIGH);
delayMicroseconds(10);
digitalWrite(trigpin, LOW);
duration=pulseIn(echopin, HIGH);
dist=duration*speed/2; if(dist<100){
  String payload = "{\"Alert Distance\":\"";
payload += dist; payload += "}";
  Serial.print("\n");
}
}

```

```


    Serial.print("Sending payload: ");
    Serial.println(payload);    if (client.publish(publishTopic,
(char*) payload.c_str())){
        Serial.println("Publish OK");
    } } if(dist>100){
    String payload = "{\"Distance\":\"";    payload
+= dist;    payload += "\"}";

    Serial.print("\n");
    Serial.print("Sending payload: ");
    Serial.println(payload);
    if(client.publish(publishTopic, (char*) payload.c_str())){
        Serial.println("Publish OK");
    } else{
        Serial.println("Publish FAILED");
    }
}
}
}


```

## OUTPUT :


### 1) When Distance greater than 100 cm

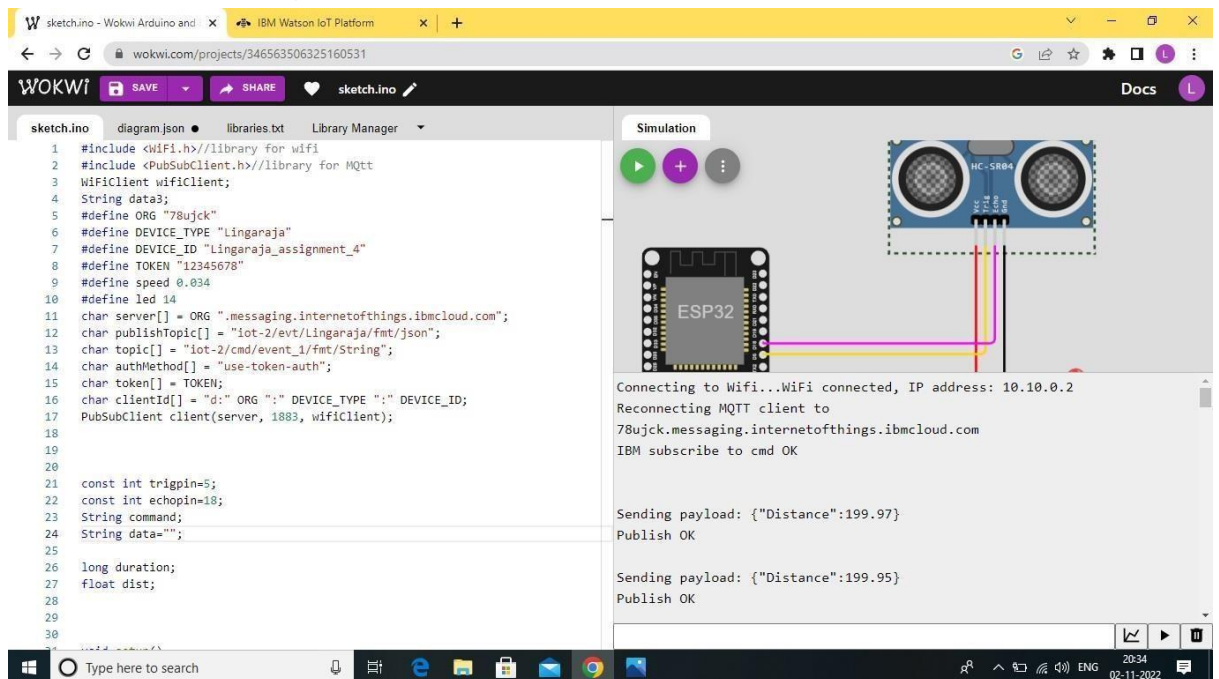

## IBM RECENT EVENTS

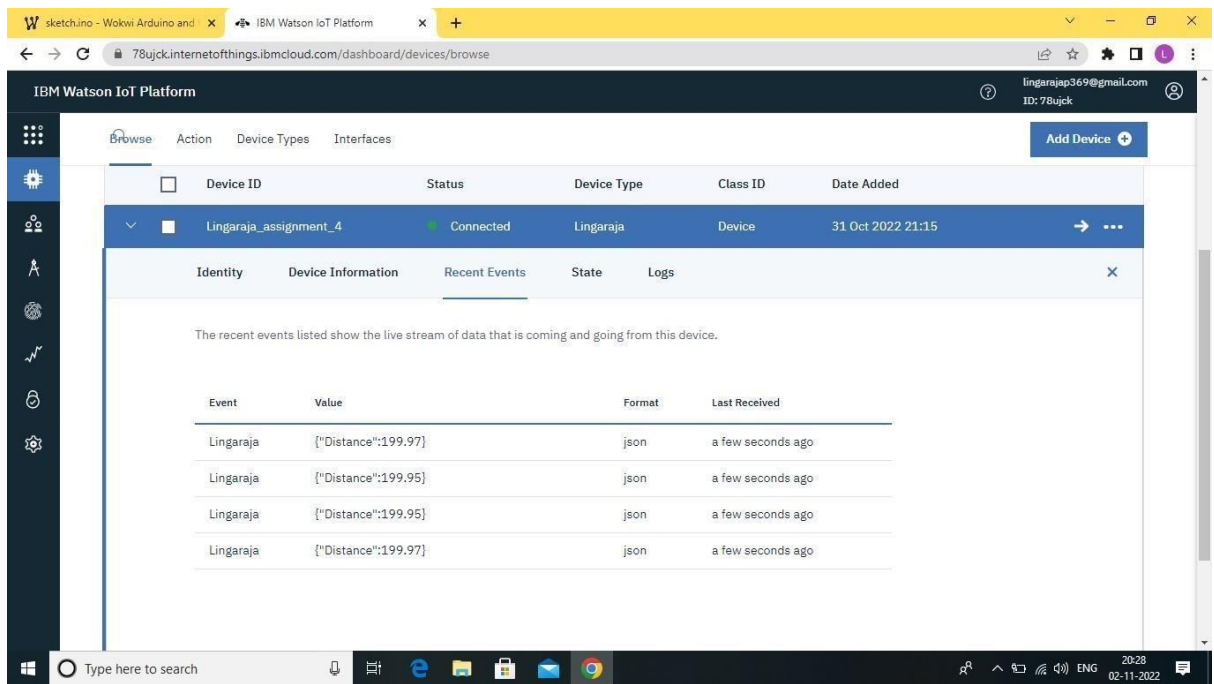

2) When distance less than 100

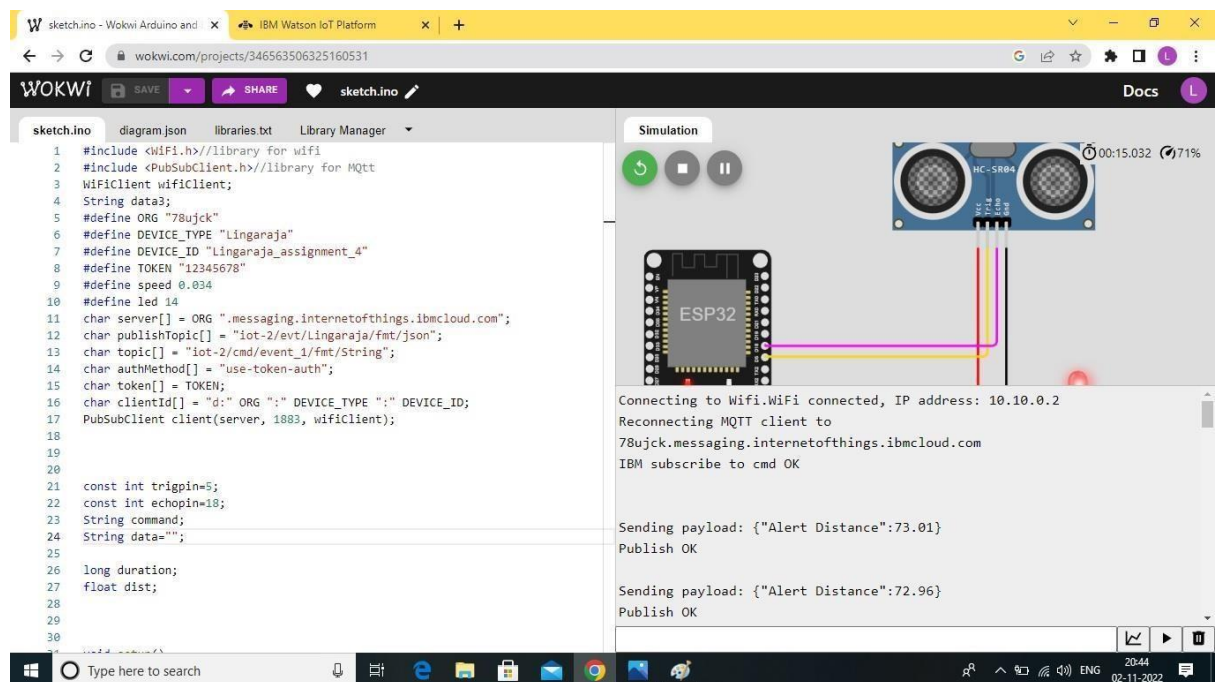

IBM RECENT EVENTS

The screenshot shows the IBM Watson IoT Platform interface. The top navigation bar includes 'Browse', 'Action', 'Device Types', and 'Interfaces'. A sidebar on the left contains icons for various functions. The main content area displays a device named 'Lingaraja\_assignment\_4' with a status of 'Connected'. Below this, a tabbed interface shows 'Identity', 'Device Information', 'Recent Events', 'State', and 'Logs'. The 'Recent Events' tab is active, showing a table of events. The table has columns for 'Event', 'Value', 'Format', and 'Last Received'. The events are all from 'Lingaraja' and contain the JSON string '{"Alert Distance":72.96}' in 'json' format, received 'a few seconds ago'.

Event	Value	Format	Last Received
Lingaraja	["Alert Distance":72.96]	json	a few seconds ago
Lingaraja	["Alert Distance":72.96]	json	a few seconds ago
Lingaraja	["Alert Distance":72.96]	json	a few seconds ago
Lingaraja	["Alert Distance":72.96]	json	a few seconds ago

**WOKWI**

**LINK** <https://wokwi.com/projects/346563506325160531>