

# ASSIGNMENT 4

## Ultrasonic sensor simulation in Wokwi

Date	14 November 2022
Team ID	PNT2022TMID29912

### Question-1:

Write a code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100cms send an "Alert" to IBM cloud and display in the device recent events.

### Code:

```
#include <WiFi.h> #include
<PubSubClient.h>
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);
//-----credentials of IBM Accounts-----
#define ORG "kotoq5"//IBM ORGANITION ID
#define DEVICE_TYPE "ESP32"//Device type mentioned in ibm watson IOT Platform #define
DEVICE_ID "12345"//Device ID mentioned in ibm watson IOT Platform #define TOKEN "12345678"
//Token
String data3;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; char
publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] = "iot-2/cmd/test/fmt/String"; char authMethod[]
= "use-token-auth";
```



```

char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback, wifiClient); const int trigPin = 5;
const int echoPin = 18; #define
SOUND_SPEED 0.034 long
duration;
float distance;
void setup() {
  Serial.begin(115200);
  pinMode(trigPin, OUTPUT);
  pinMode(echoPin, INPUT);
  wifiConnect(); mqttConnect();
}
void loop()
{
  digitalWrite(trigPin, LOW);
  delayMicroseconds(2); digitalWrite(trigPin,
  HIGH); delayMicroseconds(10);
  digitalWrite(trigPin, LOW); duration =
  pulseIn(echoPin, HIGH);
  distance = duration * SOUND_SPEED/2;
  Serial.print("Distance (cm): ");
  Serial.println(distance); if(distance<100)
  {
    Serial.println("ALERT!!");
    delay(1000);
  }
}

```



```

PublishData(distance);
delay(1000);
if (!client.loop())
{ mqttconnect();
}
}
delay(1000);
}
void PublishData(float dist)
{ mqttconnect();
String payload = "{\\\"Distance\\\":"; payload
+= dist;
payload += ",\\\"ALERT!!\\\":\\\"\\\"Distance less than 100cms\\\"\""; payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);

if (client.publish(publishTopic, (char*) payload.c_str())) {
Serial.println("Publish ok");
} else {
Serial.println("Publish failed");
}
}
void mqttconnect() {
if (!client.connected()) { Serial.print("Reconnecting
client to "); Serial.println(server);
while (!client.connect(clientId, authMethod, token)) {Serial.print(".");
delay(500);
}
}

```



```

initManagedDevice();
Serial.println();
}
}
void wificonnect()
{
Serial.println(); Serial.print("Connecting to ");
WiFi.begin("Wokwi-GUEST", "", 6); while
(WiFi.status() != WL_CONNECTED) { delay(500);
Serial.print(".");
}
Serial.println(""); Serial.println("WiFi
connected"); Serial.println("IP address: ");
Serial.println(WiFi.localIP());
}
void initManagedDevice() {
if (client.subscribe(subscribetopic))
{ Serial.println((subscribetopic)); Serial.println("subscribe to cmd
OK");
} else {
Serial.println("subscribe to cmd FAILED");
}
}
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic);
for (int i = 0; i < payloadLength; i++) {

```



```
//Serial.print((char)payload[i]); data3 +=
(char)payload[i];
}
Serial.println("data: "+ data3); data3="";
}
```


### Diagram.json:

```
{
  "version": 1, "author":
  "sudhakar",
  "editor": "wokwi",
  "parts": [
    { "type": "wokwi-esp32-devkit-v1", "id": "esp", "top": -4.67, "left": -114.67, "attrs": {} },
    { "type": "wokwi-hc-sr04", "id": "ultrasonic1", "top": 15.96, "left": 89.17, "attrs": {} }
  ],
  "connections": [
    [ "esp:TX0", "$serialMonitor:RX", "", [] ],
    [ "esp:RX0", "$serialMonitor:TX", "", [] ],
    [
      "esp:VIN",
      "ultrasonic1:VCC", "red",
      [ "h-37.16", "v-178.79", "h200", "v173.33", "h100.67" ]
    ],
    [ "esp:GND.1", "ultrasonic1:GND", "black", [ "h39.87", "v44.04", "h170" ] ],
    [ "esp:D5", "ultrasonic1:TRIG", "green", [ "h54.54", "v85.07", "h130.67" ] ],
    [ "esp:D18", "ultrasonic1:ECHO", "green", [ "h77.87", "v80.01", "h110" ] ]
  ]
}
```



}  
}

### **Circuit Diagram:**

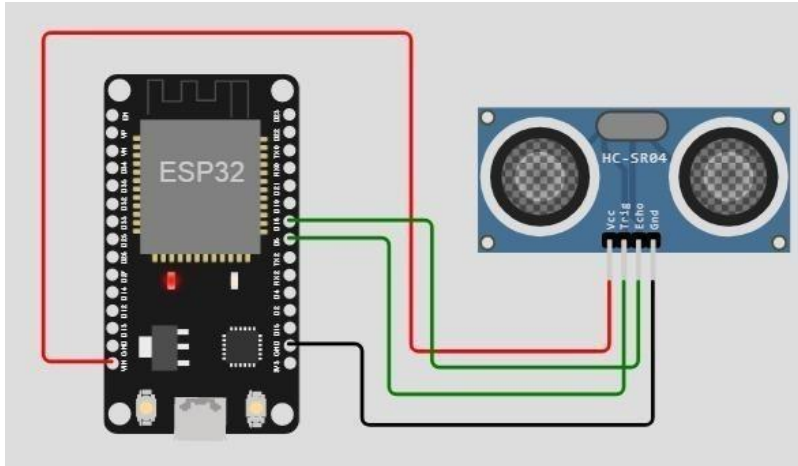


### **Output:**

Wokwi output:

```
Connecting to ....
WiFi connected
IP address:
10.10.0.2
Reconnecting client to ytluse.messaging.internetofthings.ibmcloud.com
iot-2/cmd/test/fmt/String
subscribe to cmd OK

Distance (cm): 399.92
Distance (cm): 399.96
Distance (cm): 399.94
Distance (cm): 399.98
Distance (cm): 399.94
Distance (cm): 399.92
Distance (cm): 399.94
```

### IBM cloud output:

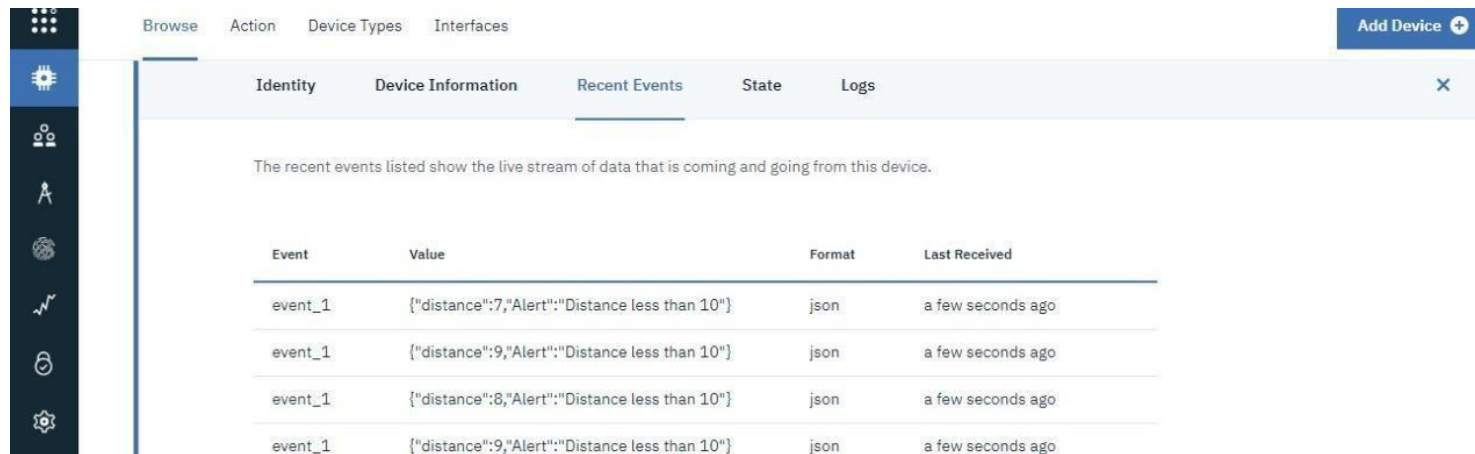

The screenshot shows the IBM Cloud IoT Platform interface. On the left is a dark sidebar with icons for various functions. The top navigation bar includes 'Browse', 'Action', 'Device Types', and 'Interfaces'. A blue 'Add Device +' button is in the top right. Below the navigation bar, there are tabs for 'Identity', 'Device Information', 'Recent Events', 'State', and 'Logs'. The 'Recent Events' tab is selected. Below the tabs, a message states: 'The recent events listed show the live stream of data that is coming and going from this device.' Below this message is a table with four columns: 'Event', 'Value', 'Format', and 'Last Received'. The table contains four rows of event data.

Event	Value	Format	Last Received
event_1	{"distance":7,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":8,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago

### Wokwi simulation link:

<https://wokwi.com/projects/348297760045269588>