

ASSIGNMENT-4

Ultrasonic sensor simulation in Wokwi

Question :

Write a code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100cms send an “Alert” to IBM cloud and display in the device recent events.

Code:

```
#include <WiFi.h>
#include <PubSubClient.h>
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);
//-----credentials of IBM Accounts-----
#define ORG "vwcvi9"//IBM ORGANITION ID
#define DEVICE_TYPE "ESP32"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "CAC55122-B0DB-4C2B-8DF5-9385E20A41AD"//Device ID mentioned in
ibm watson IOT Platform
#define TOKEN "hDorltw6NBxba0godG" //Token
String data3;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient);
const int trigPin = 5;
const int echoPin = 18;
#define SOUND_SPEED 0.034
long duration;
float distance;
void setup() {
  Serial.begin(115200);
  pinMode(trigPin, OUTPUT);
  pinMode(echoPin, INPUT);
  wificonnect();
  mqttconnect();
}
void loop()
{
  digitalWrite(trigPin, LOW);
  delayMicroseconds(2);
  digitalWrite(trigPin, HIGH);
  delayMicroseconds(10);
  digitalWrite(trigPin, LOW);
```

```

duration = pulseIn(echoPin, HIGH);
distance = duration * SOUND_SPEED/2;
Serial.print("Distance (cm): ");
Serial.println(distance);
if(distance>100)
{
Serial.println("ALERT!!");
delay(100);
PublishData(distance);
delay(100);
if (!client.loop()) {
mqttconnect();
}
}
delay(100);
}
void PublishData(float dist) {
mqttconnect();
String payload = "{\"Distance\": ";
payload += dist;
payload += ", \"ALERT!!\": \"\" \"Distance less than 100cms\"";
payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);

if (client.publish(publishTopic, (char*) payload.c_str())) {
Serial.println("Publish ok");
} else {
Serial.println("Publish failed");
}
}
void mqttconnect() {
if (!client.connected()) {
Serial.print("Reconnecting client to ");
Serial.println(server);
while (!!!client.connect(clientId, authMethod, token)) {
Serial.print(".");
delay(100);
}
initManagedDevice();
Serial.println();
}
}
void wificonnect()
{
Serial.println();
Serial.print("Connecting to ");
WiFi.begin("Wokwi-GUEST", "", 6);
while (WiFi.status() != WL_CONNECTED) {
delay(100);
Serial.print(".");
}
}

```

```

Serial.println("");
Serial.println("WiFi connected");
Serial.println("IP address: ");
Serial.println(WiFi.localIP());
}
void initManagedDevice() {
if (client.subscribe(subscribetopic)) {
Serial.println(subscribetopic);
Serial.println("subscribe to cmd OK");
} else {
Serial.println("subscribe to cmd FAILED");
}
}
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic);
for (int i = 0; i < payloadLength; i++) {
//Serial.print((char)payload[i]);
data3 += (char)payload[i];
}
Serial.println("data: "+ data3);
data3="";
}

```

Diagram.json:

```

{
  "version": 1,
  "author": "sweetysharon",
  "editor": "wokwi",
  "parts": [
    { "type": "wokwi-esp32-devkit-v1", "id": "esp", "top": -4.67, "left": -112.87, "attrs": {} },
    { "type": "wokwi-hc-sr04", "id": "ultrasonic1", "top": 15.96, "left": 89.17, "attrs": {} }
  ],
  "connections": [
    [ "esp:TX0", "$serialMonitor:RX", "", [] ],
    [ "esp:RX0", "$serialMonitor:TX", "", [] ],
    [
      "esp:VIN",
      "ultrasonic1:VCC",
      "red",
      [ "h-37.16", "v-178.79", "h200", "v173.33", "h100.67" ]
    ],
    [ "esp:GND.1", "ultrasonic1:GND", "black", [ "h39.87", "v44.04", "h170" ] ],
  ]
}

```

```


    [ "esp:D5", "ultrasonic1:TRIG", "green", [ "h54.54", "v85.07", "h130.67" ] ],
    [ "esp:D18", "ultrasonic1:ECHO", "green", [ "h77.87", "v80.01", "h110" ] ]
  ]
}

```

Wokwi simulation link:

<https://wokwi.com/projects/346508314441417298>

Circuit Diagram:

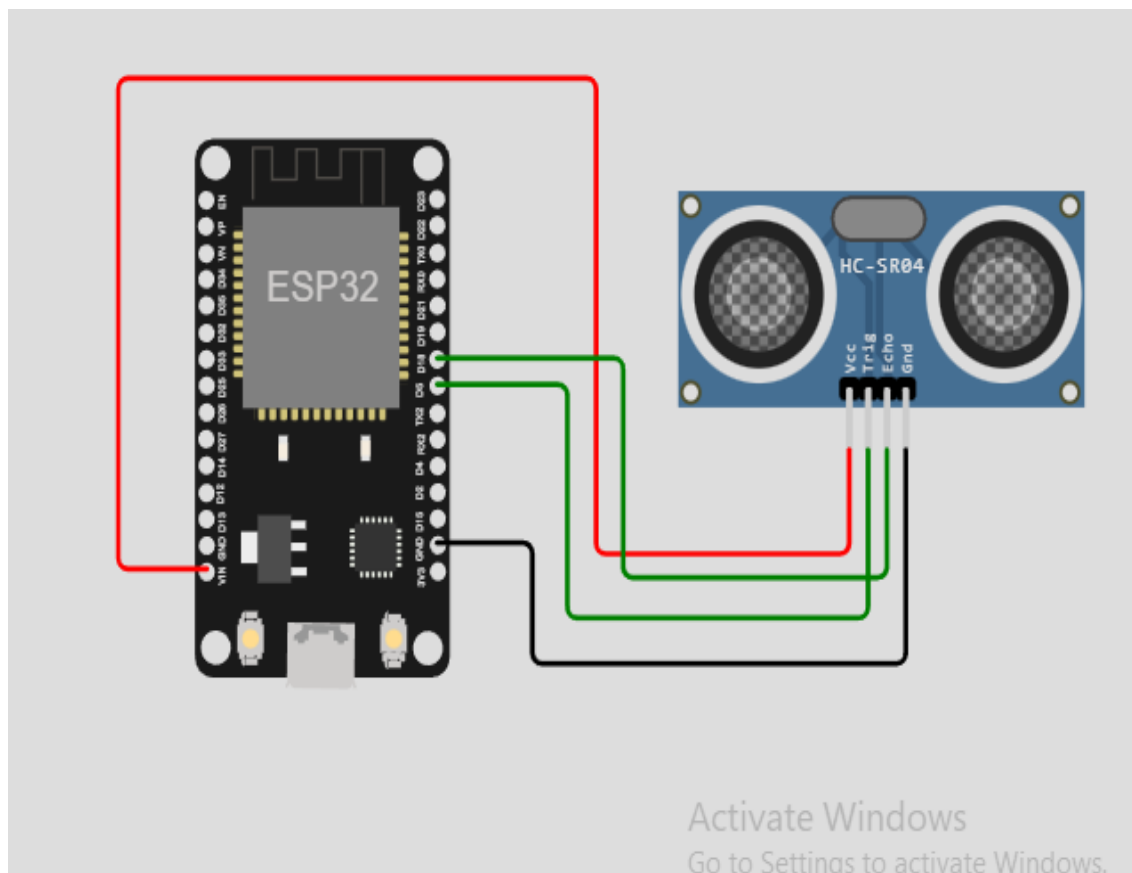

Output:

Wokwi output:

```
Connecting to .
WiFi connected
IP address:
10.10.0.2
Reconnecting client to vwcvi9.messaging.internetofthings.ibmcloud.com
iot-2/cmd/test/fmt/String
subscribe to cmd OK

Distance (cm): 399.92
Distance (cm): 399.94
Distance (cm): 399.94
Distance (cm): 399.94
Distance (cm): 399.94
Distance (cm): 399.94
Distance (cm): 399.96
Distance (cm): 399.96
```

Activate Windows
Go to Settings to activate Windows.

IBM cloud output:

The screenshot displays the IBM Cloud IoT Platform console. On the left is a dark sidebar with navigation icons. The main area has a top navigation bar with 'Browse', 'Action', 'Device Types', and 'Interfaces'. A table lists devices, with one selected: ID 'CAC55122-B0DB-4C2B-8DF5-9385E20A41AD', status 'Connected', type 'ESP32', class 'Device', added '5 Nov 2022 02:26'. Below the table, the 'Recent Events' tab is active, showing a live stream of data. The events are listed in a table with columns: Event, Value, Format, and Last Received. All events are 'Data' type, with values containing distance measurements and alerts, in 'json' format, received 'a few seconds ago'.

Event	Value	Format	Last Received
Data	{"Distance":399.94,"ALERT!":"Distance less tha..."}	json	a few seconds ago
Data	{"Distance":399.94,"ALERT!":"Distance less tha..."}	json	a few seconds ago
Data	{"Distance":399.96,"ALERT!":"Distance less tha..."}	json	a few seconds ago
Data	{"Distance":399.94,"ALERT!":"Distance less tha..."}	json	a few seconds ago
Data	{"Distance":399.96,"ALERT!":"Distance less tha..."}	json	a few seconds ago