

## Assignment – 4

### Working on Wokwi

Assignment Date	1 November 2022
Student Name	Mr. Sathish S
Student Roll Number	718019L132
Maximum Marks	2 Marks

#### Question :

Write a code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100cms send an “Alert” to IBM cloud and display in the device recent events.

#### Code:

```
#include <WiFi.h>
#include <PubSubClient.h>
void callback(char* subscribtopic, byte* payload, unsigned int
payloadLength);
//-----credentials of IBM Accounts-----
#define ORG "cr4s7d"//IBM ORGANITION ID
#define DEVICE_TYPE "NodeMCU"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "2461"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "12345678" //Token
String data3;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribtopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient);
const int trigPin = 5;
const int echoPin = 18;
#define SOUND_SPEED 0.034
long duration;
float distance;
void setup() {
  Serial.begin(115200);
```

```

pinMode(trigPin, OUTPUT);
pinMode(echoPin, INPUT);
wificonnect();
mqttconnect();
}
void loop()
{
digitalWrite(trigPin, LOW);
delayMicroseconds(2);
digitalWrite(trigPin, HIGH);
delayMicroseconds(10);
digitalWrite(trigPin, LOW);
duration = pulseIn(echoPin, HIGH);
distance = duration * SOUND_SPEED/2;
Serial.print("Distance (cm): ");
Serial.println(distance);
if(distance<100)
{
Serial.println("ALERT!!");
delay(1000);
PublishData(distance);
delay(1000);
if (!client.loop()) {
mqttconnect();
}
}
delay(1000);
}
void PublishData(float dist) {
mqttconnect();
String payload = "{\"Distance\": ";
payload += dist;
payload += ", \"ALERT!!\": \"\" \"Distance less than 100cms\"";
payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);

if (client.publish(publishTopic, (char*) payload.c_str())) {
Serial.println("Publish ok");
} else {
Serial.println("Publish failed");
}
}
void mqttconnect() {
if (!client.connected()) {

```

```

Serial.print("Reconnecting client to ");
Serial.println(server);
while (!client.connect(clientId, authMethod, token)) {
Serial.print(".");
delay(500);
}
initManagedDevice();
Serial.println();
}
}
void wificonnect()
{
Serial.println();
Serial.print("Connecting to ");
WiFi.begin("Wokwi-GUEST", "", 6);
while (WiFi.status() != WL_CONNECTED) {
delay(500);
Serial.print(".");
}
Serial.println("");
Serial.println("WiFi connected");
Serial.println("IP address: ");
Serial.println(WiFi.localIP());
}
void initManagedDevice() {
if (client.subscribe(subscribetopic)) {
Serial.println((subscribetopic));
Serial.println("subscribe to cmd OK");
} else {
Serial.println("subscribe to cmd FAILED");
}
}
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic);
for (int i = 0; i < payloadLength; i++) {
//Serial.print((char)payload[i]);
data3 += (char)payload[i];
}
Serial.println("data: " + data3);
data3="";
}

```


## Diagram.json:

```
{
  "version": 1,
  "author": "19L104 - ARAVIND T",
  "editor": "wokwi",
  "parts": [
    { "type": "wokwi-esp32-devkit-v1", "id": "esp", "top": 0, "left": 0, "attrs": {} },
    { "type": "wokwi-hc-sr04", "id": "ultrasonic1", "top": -118.37, "left": -37.17, "attrs": {} }
  ],
  "connections": [
    [ "esp:TX0", "$serialMonitor:RX", "", [] ],
    [ "esp:RX0", "$serialMonitor:TX", "", [] ],
    [ "ultrasonic1:VCC", "esp:VIN", "red", [ "v-0.76", "h-68.44", "v184.67" ] ],
    [ "ultrasonic1:GND", "esp:GND.1", "black", [ "v-0.1", "h105.22", "v171.33" ] ],
    [ "ultrasonic1:TRIG", "esp:D5", "green", [ "v11.9", "h75.67", "v104.67" ] ],
    [ "ultrasonic1:ECHO", "esp:D18", "green", [ "v6.57", "h81.78", "v96" ] ]
  ]
}
```

## Wokwi Simulation link:

<https://wokwi.com/projects/348488317522674258>

## Circuit Diagram:

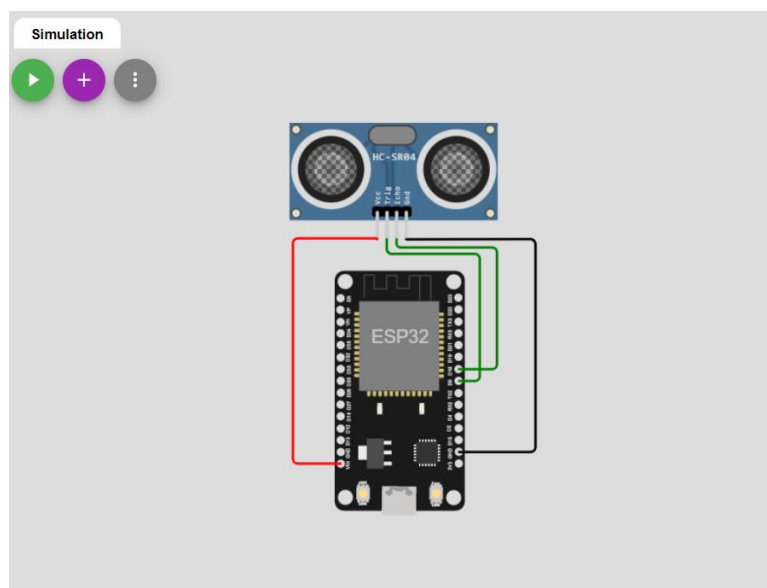

## Output:

### Wokwi Output

```
Connecting to ....
WiFi connected
IP address:
10.10.0.2
Reconnecting client to cr4s7d.messaging.internetofthings.ibmcloud.com
iot-2/cmd/test/fmt/String
subscribe to cmd OK
```

```
Distance (cm): 284.97
Distance (cm): 284.94
Distance (cm): 284.95
Distance (cm): 284.95
Distance (cm): 284.95
Distance (cm): 284.95
Distance (cm): 284.95
```

```
Distance (cm): 284.99
Distance (cm): 284.94
Distance (cm): 123.98
Distance (cm): 95.96
ALERT!!
Sending payload: {"Distance":95.96,"ALERT!!":"Distance less than 100cms"}
Publish ok
Distance (cm): 95.96
ALERT!!
Sending payload: {"Distance":95.96,"ALERT!!":"Distance less than 100cms"}
Publish ok
```

### IBM Cloud Output:

Identity	Device Information	Recent Events	State	Logs
The recent events listed show the live stream of data that is coming and going from this device.				
Event	Value	Format	Last Received	
Data	{"Distance":95.96,"ALERT!!":"Distance less than ...	json	a few seconds ago	
Data	{"Distance":95.98,"ALERT!!":"Distance less than ...	json	a few seconds ago	
Data	{"Distance":95.96,"ALERT!!":"Distance less than ...	json	a minute ago	
Data	{"Distance":95.96,"ALERT!!":"Distance less than ...	json	2 minutes ago	
Data	{"Distance":67.98,"ALERT!!":"Distance less than ...	json	20 minutes ago	