

ASSIGNMENT-4

TEAM ID: PNT2022TMID14695

Question-1:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100cms send "alert" to ibm cloud and display in device recent events.

Upload document with wokwi share link and images of ibm cloud.

Solution:

```
#include <WiFi.h> //library for wifi
#include <PubSubClient.h> //library for MQTT

#define ECHO_GPIO 12
#define TRIGGER_GPIO 13
#define MAX_DISTANCE_CM 100 // Maximum of 5 meters
#include "Ultrasonic.h"

Ultrasonic ultrasonic(13, 12);
int distance;

void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);

//-----credentials of IBM Accounts-----

#define ORG "4t4nj5" //IBM ORGANITION ID
#define DEVICE_TYPE "Sharmila" //Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "2229" //Device ID mentioned in ibm watson IOT Platform
#define TOKEN "87654321" //Tokenn
String data3;
float h, t;

//----- Customise the above values -----
char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; // Server Name
char publishTopic[] = "iot-2/evt/Data/fmt/json"; // topic name and type of event
perform and format in which data to be send
char subscribetopic[] = "iot-2/cmd/command/fmt/String"; // cmd REPRESENT command
type AND COMMAND IS TEST OF FORMAT STRING
char authMethod[] = "use-token-auth"; // authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; //client id

//-----
WiFiClient wifiClient; // creating the instance for wificlient
PubSubClient client(server, 1883, callback, wifiClient); //calling the predefined
client id by passing parameter like server id, port and wificredential
```

ASSIGNMENT-4

TEAM ID: PNT2022TMID14695

```
void setup()// configuring the ESP32
{
    Serial.begin(115200);
    delay(10);
    Serial.println();
    wificonnect();
    mqttconnect();
}

void loop()// Recursive Function
{

    distance = ultrasonic.read(CM);
    if(distance < 100){
        Serial.print("Distance in CM: ");
        Serial.println(distance);
        PublishData(distance);
        delay(1000);
        if (!client.loop()) {
            mqttconnect();
        }

    }

    delay(1000);

}

/*.....retrieving to
Cloud. .... */

void PublishData(float temp) {
    mqttconnect();//function call for connecting to ibm
    /*
        creating the String in in form JSon to update the data to ibm cloud
    */
    String payload = "{\"Alert Distance\":\"";
    payload += temp;
    payload += "\"}";

    Serial.print("Sending payload: ");
    Serial.println(payload);

    if (client.publish(publishTopic, (char*) payload.c_str())) {
        Serial.println("Publish ok");// if it sucessfully upload data on the cloud
        then it will print publish ok in Serial monitor or else it will print publish
        failed
    } else {
        Serial.println("Publish failed");
    }
}
```

ASSIGNMENT-4
TEAM ID: PNT2022TMID14695

```
}

}

void mqttconnect() {
    if (!client.connected()) {
        Serial.print("Reconnecting client to ");
        Serial.println(server);
        while (!client.connect(clientId, authMethod, token)) {
            Serial.print(".");
            delay(500);
        }

        initManagedDevice();
        Serial.println();
    }
}

void wificonnect() //function defination for wificonnect
{
    Serial.println();
    Serial.print("Connecting to ");

    WiFi.begin("Wokwi-GUEST", "", 6); //passing the wifi credentials to establish the
connection
    while (WiFi.status() != WL_CONNECTED) {
        delay(500);
        Serial.print(".");
    }
    Serial.println("");
    Serial.println("WiFi connected");
    Serial.println("IP address: ");
    Serial.println(WiFi.localIP());
}

void initManagedDevice() {
    if (client.subscribe(subscribetopic)) {
        Serial.println((subscribetopic));
        Serial.println("subscribe to cmd OK");
    } else {
        Serial.println("subscribe to cmd FAILED");
    }
}

void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
    Serial.print("callback invoked for topic: ");
    Serial.println(subscribetopic);
    for (int i = 0; i < payloadLength; i++) {
        //Serial.print((char)payload[i]);
        data3 += (char)payload[i];
    }
    Serial.println("data: "+ data3);
}
```



ASSIGNMENT-4

TEAM ID: PNT2022TMID14695

```
if(data3=="lighton")
{
Serial.println(data3);
}
else
{
Serial.println(data3);
}
data3="";
}
```

ASSIGNMENT -4

TEAM ID: PNT2022TMID14695

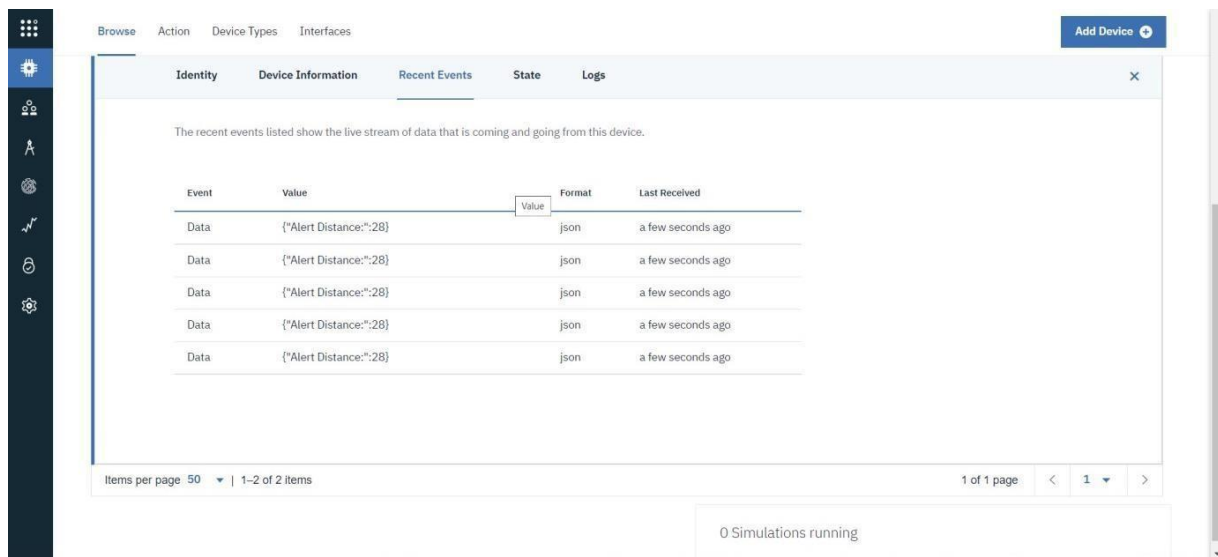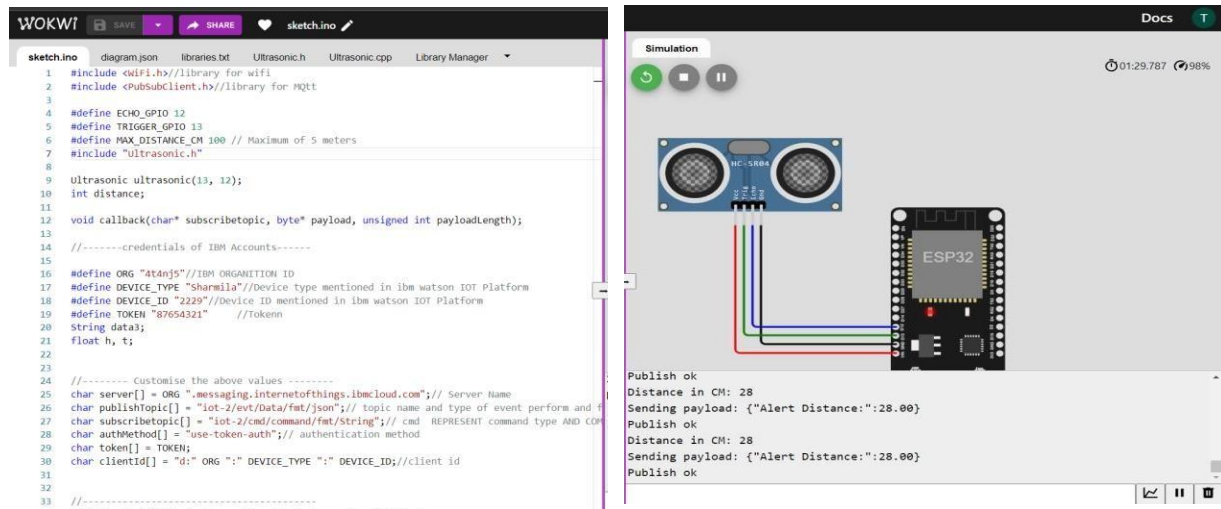

Wokwi share link:

<https://wokwi.com/projects/347663953513415251>