

ASSIGNMENT- 4

DISTANCE DETECTION USING ULTRASONIC SENSOR

Question:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to IBM cloud and display in device recent events.

CODE:

```

1  #include <WiFi.h> //library for wifi
2  #include <PubSubClient.h> //library for MQTT
3
4
5  void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);
6
7  //-----credentials of IBM Accounts-----
8
9  #define ORG "4hn0jp" //IBM ORGANITION ID
10 #define DEVICE_TYPE "ULTRASON" //Device type mentioned in ibm watson IOT Platform
11 #define DEVICE_ID "DISTANCEDETECT" //Device ID mentioned in ibm watson IOT Platform
12 #define TOKEN "wu05s7PR)ZSegVk&Rx" //Token
13 String data3;
14 float dist;
15
16
17 //----- Customise the above values -----
18 char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; // Server Name
19 char publishTopic[] = "iot-2/evt/Data/fmt/json"; // topic name and type of event perform and format in which data to be send
20 char subscribetopic[] = "iot-2/cmd/test/fmt/String"; // cmd REPRESENT command type AND COMMAND IS TEST OF FORMAT STRING
21 char authMethod[] = "use-token-auth"; // authentication method
22 char token[] = TOKEN;
23 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; //client id
24
25
26 //-----
27 WiFiClient wifiClient; // creating the instance for wifiClient
28 PubSubClient client(server, 1883, callback, wifiClient); //calling the predefined client id by passing parameter like server id,portand wificredential
29
30 int LED = 4;
31 int trig = 5;
32 int echo = 18;
33 void setup()
34 {
35   Serial.begin(115200);

```

```
esp32-blink.ino • diagram.json • libraries.txt • Library Manager ▼
36  pinMode(trig,OUTPUT);
37  pinMode(echo,INPUT);
38  pinMode(LED, OUTPUT);
39  delay(10);
40  wificonnect();
41  mqttconnect();
42  }
43  void loop()// Recursive Function
44  {
45
46      digitalWrite(trig,LOW);
47      digitalWrite(trig,HIGH);
48      delayMicroseconds(10);
49      digitalWrite(trig,LOW);
50      float dur = pulseIn(echo,HIGH);
51      float dist = (dur * 0.0343)/2;
52      Serial.print ("Distancein cm");
53      Serial.println(dist);
54
55
56      PublishData(dist);
57      delay(1000);
58      if (!client.loop()) {
59          mqttconnect();
60      }
61  }
62
63
64
65  /*.....retrieving to Cloud.....*/
66
67  void PublishData(float dist) {
68      mqttconnect();//function call for connecting to ibm
69      /*
70      |   creating the String in in form JSON to update the data to ibm cloud
```

```

70 | creating the String in in form JSON to update the data to ibm cloud
71 */
72 String object;
73 if (dist <100)
74 {
75     digitalWrite(LED,HIGH);
76     Serial.println("object is near");
77     object = "Near";
78 }
79 else
80 {
81     digitalWrite(LED,LOW);
82     Serial.println("no object found");
83     object = "No";
84 }
85
86 String payload = "{\"distance\":";
87 payload += dist;
88 payload += ", \"object\":\":";
89 payload += object;
90 payload += "\"}";
91
92
93 Serial.print("Sending payload: ");
94 Serial.println(payload);
95
96
97
98

```

```

esp32-blink.ino • diagram.json • libraries.txt • Library Manager
98
99 if (client.publish(publishTopic, (char*) payload.c_str())) {
100     Serial.println("Publish ok");// if it sucessfully upload data on the cloud then it will print publish ok in Serial monitor or else it will print publish failed
101 } else {
102     Serial.println("Publish failed");
103 }
104
105 }
106 void mqttconnect() {
107     if (!client.connected()) {
108         Serial.print("Reconnecting client to ");
109         Serial.println(server);
110         while (!client.connect(clientId, authMethod, token)) {
111             Serial.print(".");
112             delay(500);
113         }
114
115         initManagedDevice();
116         Serial.println();
117     }
118 }
119 void wificonnect() //function defination for wificonnect
120 {
121     Serial.println();
122     Serial.print("Connecting to ");
123
124     WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish the connection
125     while (WiFi.status() != WL_CONNECTED) {
126         delay(500);
127         Serial.print(".");
128     }
129     Serial.println("");
130     Serial.println("WiFi connected");
131     Serial.println("IP address: ");
132     Serial.println(WiFi.localIP());

```


```

esp32-blink.ino • diagram.json • libraries.txt • Library Manager ▼
123
124   WiFi.begin("Wokwi-GUEST", "", 6); //passing the wifi credentials to establish the connection
125   while (WiFi.status() != WL_CONNECTED) {
126       delay(500);
127       Serial.print(".");
128   }
129   Serial.println("");
130   Serial.println("WiFi connected");
131   Serial.println("IP address: ");
132   Serial.println(WiFi.localIP());
133   }
134
135   void initManagedDevice() {
136       if (client.subscribe(subscribetopic)) {
137           Serial.println((subscribetopic));
138           Serial.println("subscribe to cmd OK");
139       } else {
140           Serial.println("subscribe to cmd FAILED");
141       }
142   }
143
144   void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
145   {
146
147       Serial.print("callback invoked for topic: ");
148       Serial.println(subscribetopic);
149       for (int i = 0; i < payloadLength; i++) {
150           //Serial.print((char)payload[i]);
151           data3 += (char)payload[i];
152       }
153
154       // Serial.println("data: "+ data3);
155       // if(data3=="Near")
156       // {
157       // Serial.println(data3);
158       // Serial.println("data received");
159   }

```

```
esp32-blink.ino • diagram.json • libraries.txt • Library Manager ▼  
142 }  
143  
144 void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)  
145 {  
146  
147     Serial.print("callback invoked for topic: ");  
148     Serial.println(subscribetopic);  
149     for (int i = 0; i < payloadLength; i++) {  
150         //Serial.print((char)payload[i]);  
151         data3 += (char)payload[i];  
152     }  
153  
154     // Serial.println("data: "+ data3);  
155     // if(data3=="Near")  
156     // {  
157     // Serial.println(data3);  
158     // digitalWrite(LED,HIGH);  
159  
160     // }  
161  
162     // else  
163     // {  
164     // Serial.println(data3);  
165     // digitalWrite(LED,LOW);  
166  
167     // }  
168     data3="";  
169  
170  
171 }
```

OUTPUT:

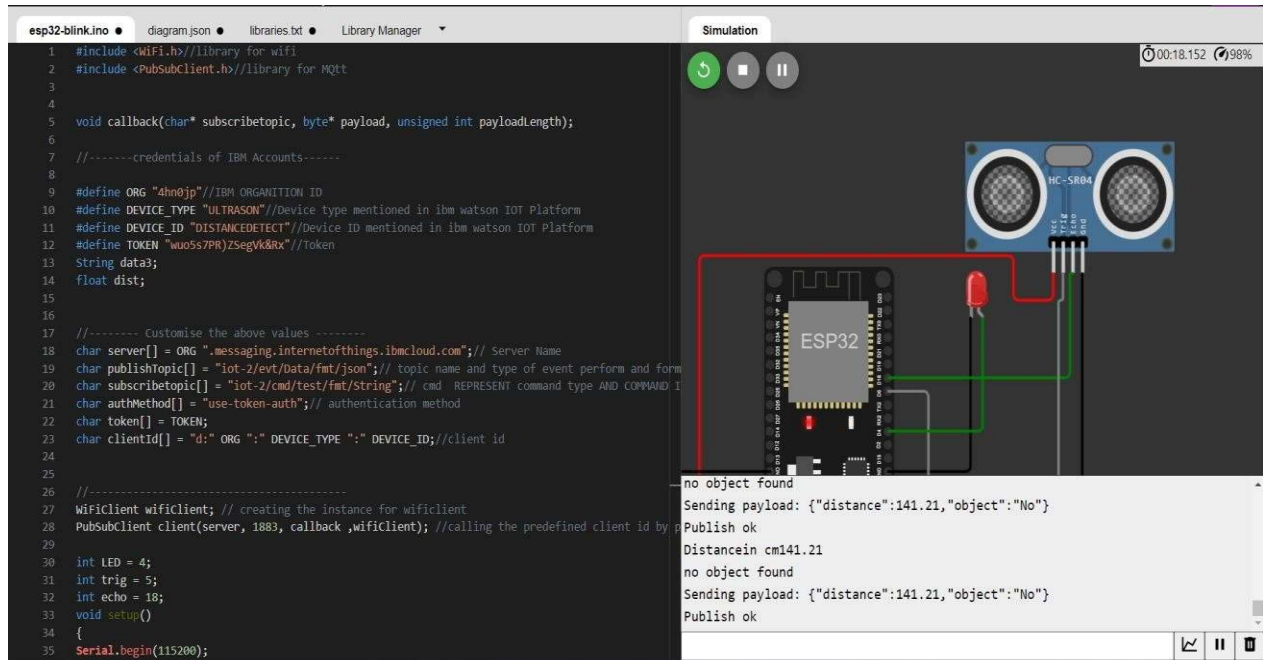


Data sent to the IBM cloud device when the object is far

The screenshot shows the IBM IoT Cloud console interface. The 'Recent Events' tab is selected, displaying a table of events for the device 'DISTANCEDETECT'. The table lists five events, each with a 'Data' event type, a JSON payload containing distance and object status, and a timestamp.

Event	Value	Format	Last Received
Data	{"distance":141.21,"object":"No"}	json	a few seconds ago
Data	{"distance":141.21,"object":"No"}	json	a few seconds ago
Data	{"distance":141.21,"object":"No"}	json	a few seconds ago
Data	{"distance":141.18,"object":"No"}	json	a few seconds ago
Data	{"distance":141.2,"object":"No"}	json	a few seconds ago

When object is near to the ultrasonic sensor

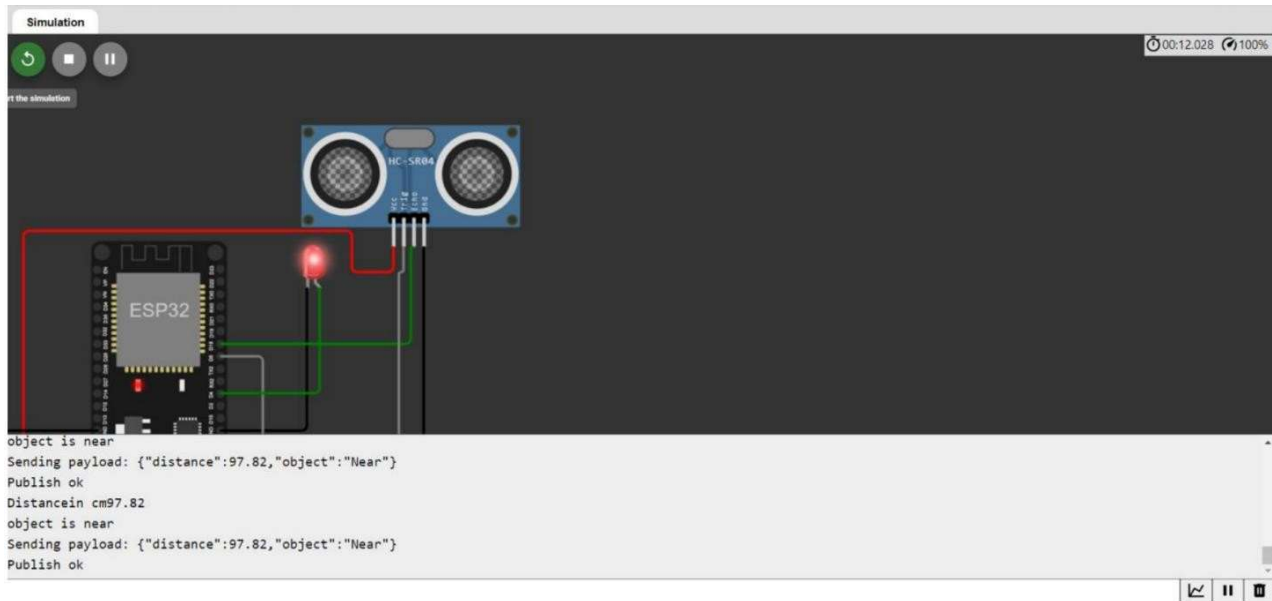

Data sent to the IBM Cloud Device when the object is near

The screenshot shows the IBM Cloud IoT Platform console. The 'Recent Events' tab is selected, displaying a table of data events. The table has four columns: Event, Value, Format, and Last Received. The events are listed as follows:

Event	Value	Format	Last Received
Data	{"distance":79.66,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.64,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.66,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.64,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.66,"object":"Near"}	json	a few seconds ago

At the bottom of the console, it shows 'Items per page 50' and '1-2 of 2 items'.