

ASSIGNMENT 4

Date	Nov 02
Name	A.Abina Jerome
Team ID	PPTN2022TMID34698
Project Name	IOT based smart crop protection system for agriculture

Write code and connections in wokwi for ultrasonic sensor.

Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events.

Upload document with wokwi share link and images of ibm cloud

CODE:

```
#include <WiFi.h>
#include <PubSubClient.h>
WiFiClient;

#define ORG "nhpwjc"
#define DEVICE_TYPE "NodeMCU"
#define DEVICE_ID "USE YOUR ID"
#define TOKEN "USE YOUR TOKEN"
#define speed 0.034

char server[] =
ORG
".messaging.internetofthings.ibmcloud.com"; char
publishTopic[] = "iot-2/evt/Data/fmt/json"; char topic[] =
"iot-2/cmd/home/fmt/String"; char authMethod[] = "usetoken
auth"; char token[] = TOKEN; char clientId[] = "d:" ORG ":"
DEVICE_TYPE ":" DEVICE_ID; PubSubClient client(server, 1883,
wifiClient); void publishData(); const int trigpin=5;
const int echopin=18;
String command;
String data="";
Long
```

```

duration;
float dist;
void
setup()
{
  Serial.begin(115200); pinMode(trigpin,
  OUTPUT);

```

```

  pinMode(echopin, INPUT); wifiConnect(); mqttConnect();
  } void loop() {

```

```

  publishData(); delay(500);

```

```

  if (!client.loop()) {
    mqttConnect(); } }

```

```

void wifiConnect() {
  Serial.print("Connecting to "); Serial.print("Wifi");
  WiFi.begin("Wokwi-GUEST", "", 6); while (WiFi.status() !=
  WL_CONNECTED) { delay(500);
  Serial.print("."); }
  Serial.print("WiFi connected, IP address: "); Serial.println(WiFi.localIP());
}

```

```

void mqttConnect() { if
  (!client.connected()) {
    Serial.print("Reconnecting MQTT client to "); Serial.println(server); while
    (!client.connect(clientId, authMethod, token)) { Serial.print(".");
    delay(500);
    } initManagedDevice();
    Serial.println(); } }

```

```

void initManagedDevice() { if
  (client.subscribe(topic)) {
    // Serial.println(client.subscribe(topic)); Serial.println("subscribe to cmd
    OK");
  } else {
    Serial.println("subscribe to cmd FAILED"); } }

```

```

void publishData()
{ digitalWrite(trigpin, LOW);
  digitalWrite(trigpin, HIGH);

```

```

{


```

```

        delayMicroseconds(10);
        digitalWrite(trigpin, LOW);
duration=pulseIn(echopin, HIGH);
dist=duration*speed/2;
if(dist<100){ String payload =
{"Alert distance\":"; payload +=
dist; payload += "}";
Serial.print("\n");
Serial.print("Sending payload: ");
Serial.println(payload); if
(client.publish(publishTopic,
(char*) payload.c_str()))
Serial.println("Publish OK");
} else {
Serial.println("Publish FAILED"); } }
}

```

CONNECTIONS:

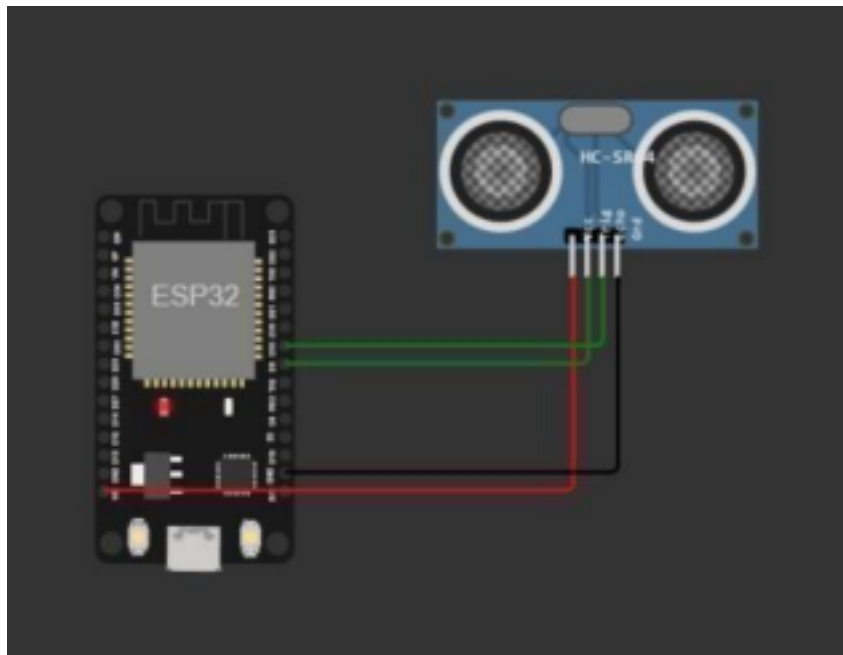

OUTPUT:

```
Sending payload: {"Alert distance":93.99}
Publish OK

Sending payload: {"Alert distance":93.96}
Publish OK

Sending payload: {"Alert distance":93.96}
Publish OK

Sending payload: {"Alert distance":93.96}
Publish OK

Sending payload: {"Alert distance":93.96}
Publish OK

Sending payload: {"Alert distance":93.96}
Publish OK
```

