

ASSIGNMENT 4

Date	24 Oct 22
Name	Vijitha <i>K L</i>
Team ID	PNT2022TMID34214
Project Name	Gas leakage monitoring and alerting system for industries

Write code and connections in wokwi for ultrasonic sensor.

Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events.

Upload document with wokwi share link and images of ibm cloud

CODE:

```
#include <WiFi.h>
#include <PubSubClient.h>
WiFiClient;

#define ORG "nhpwjc"
#define DEVICE_TYPE "NodeMCU"
#define DEVICE_ID "USE YOUR ID"
#define TOKEN "USE YOUR TOKEN"
#define speed 0.034

char server[] = ORG
".messaging.internetofthings.ibmcloud.com"; char
publishTopic[] = "iot-2/evt/Data/fmt/json"; char topic[] =
"iot-2/cmd/home/fmt/String"; char authMethod[] = "use-
token- auth"; char token[] = TOKEN; char clientId[] = "d:"
ORG ":" DEVICE_TYPE ":" DEVICE_ID; PubSubClient
client(server, 1883, wifiClient); void publishData();
  const int trigpin=5;
const int echopin=18;
String command;
String data="";
  long
duration; float
dist;

void
setup()
{
  Serial.begin(115200);
  pinMode(trigpin, OUTPUT);
```

```

pinMode(echopin,          INPUT);
wifiConnect(); mqttConnect();
}    void    loop()    {

    publishData(); delay(500);

    if (!client.loop()) {
mqttConnect(); } }

void wifiConnect() {
    Serial.print("Connecting to "); Serial.print("Wifi");
    WiFi.begin("Wokwi-GUEST", "", 6); while (WiFi.status() !=
    WL_CONNECTED) { delay(500);
        Serial.print(".");
    }
    Serial.print("WiFi connected, IP address: "); Serial.println(WiFi.localIP());
}

void mqttConnect() { if
    (!client.connected()) {
        Serial.print("Reconnecting MQTT client to "); Serial.println(server);
        while (!client.connect(clientId,      authMethod,      token)) {
            Serial.print("."); delay(500);
        } initManagedDevice();
        Serial.println(); } }

void initManagedDevice() { if
    (client.subscribe(topic)) {
        // Serial.println(client.subscribe(topic)); Serial.println("subscribe to
        cmd OK");
    } else {
        Serial.println("subscribe to cmd FAILED"); } }

void publishData()
{ digitalWrite(trigpin,LOW);
  digitalWrite(trigpin,HIGH);


```

```

delayMicroseconds(10); digitalWrite(trigpin, LOW);
duration=pulseIn(echopin, HIGH);
dist=duration*speed/2; if(dist<100){
  String payload = "{\"Alert distance\":\""; payload +=
  dist; payload += "}";
  Serial.print("\n");
  Serial.print("Sending payload: "); Serial.println(payload);
  if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish OK");
  } else {
    Serial.println("Publish FAILED"); }
}
}

```

CONNECTIONS:

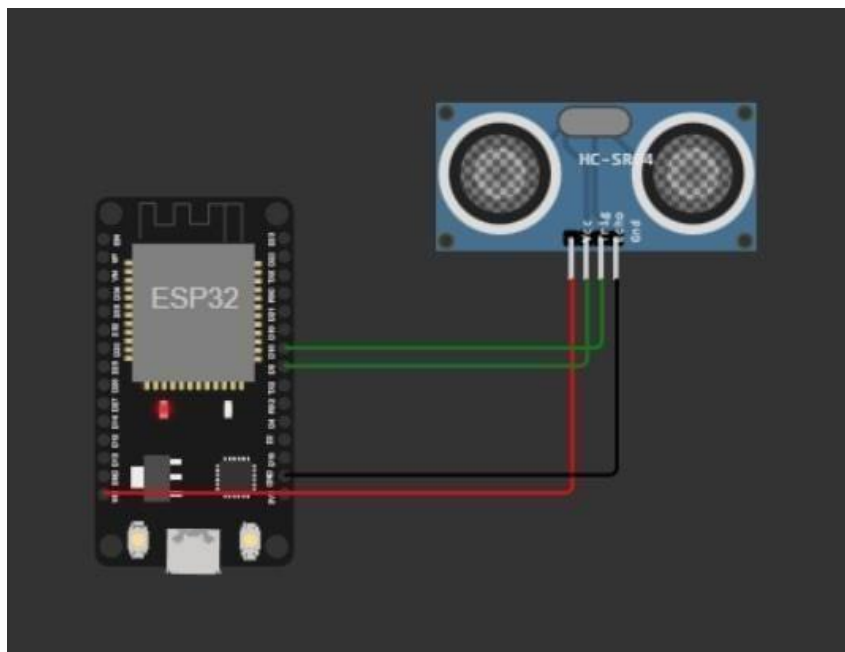

OUTPUT:

