

ASSIGNMENT-4

Date	2 Nov 2022
Name	Jebisha J
Team ID	PNT2022TMID33996
Project Name	IoT Based Safety Gadgets for Child Safety Monitoring and Notification

Write code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100 cms send an "alert" to the IBM cloud and display in the device recent events.

```
#include <WiFi.h>
#include <PubSubClient.h>
WiFiClient wifiClient;
String data3;
#define ORG "lo1feh"
#define DEVICE_TYPE "jeni"
#define DEVICE_ID "123"
#define TOKEN "765432198"
#define speed 0.034
#define led 14
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/shreedharen/fmt/json";
char topic[] = "iot-2/cmd/led/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);
const int trigpin=5;
const int echopin=18;
String command;
String data="";
long duration;
float dist;
void setup()
{
  Serial.begin(115200);
  pinMode(led, OUTPUT);
  pinMode(trigpin, OUTPUT);
  pinMode(echopin, INPUT);
  wifiConnect();
```

```

mqttConnect();
}
void loop() {
  bool isNearby = dist < 100;
  digitalWrite(led, isNearby);
  publishData();
  delay(500);
  if (!client.loop()) {
    mqttConnect();
  }
}

void wifiConnect() {
  Serial.print("Connecting to "); Serial.print("Wifi");
  WiFi.begin("Wokwi-GUEST", "", 6);
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  }
  Serial.print("WiFi connected, IP address: ");
  Serial.println(WiFi.localIP());
}

void mqttConnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting MQTT client to ");
    Serial.println(server);
    while (!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
      delay(500);
    }
    initManagedDevice();
    Serial.println();
  }
}

void initManagedDevice() {
  if (client.subscribe(topic)) {
    // Serial.println(client.subscribe(topic));
    Serial.println("IBM subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}

void publishData()
{
  digitalWrite(trigpin,LOW);
  digitalWrite(trigpin,HIGH);
  delayMicroseconds(10);
  digitalWrite(trigpin,LOW);
  duration=pulseIn(echopin,HIGH);
  dist=duration*speed/2;
  if(dist<100){

```


```

String payload = "{\"Alert Distance\":\"";
payload += dist;
payload += "}";
Serial.print("\n");
Serial.print("Sending payload: ");
Serial.println(payload);
if (client.publish(publishTopic, (char*) payload.c_str())) {
Serial.println("Publish OK");
}
}
if(dist>100){
String payload = "{\"Distance\":\"";
payload += dist;
payload += "}";
Serial.print("\n");
Serial.print("Sending payload: ");
Serial.println(payload);
if(client.publish(publishTopic, (char*) payload.c_str())) {
Serial.println("Publish OK");
}else {
Serial.println("Publish FAILED");
}
}
}
}

```

Link: <https://wokwi.com/projects/347643133990797906>


Connection:

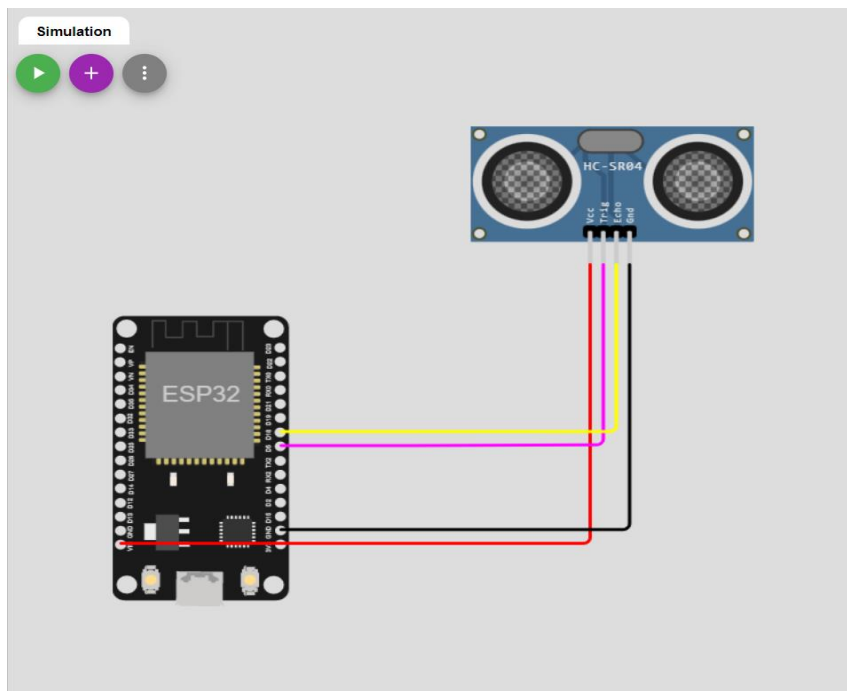

Output:

Simulation

00:23.461 99%

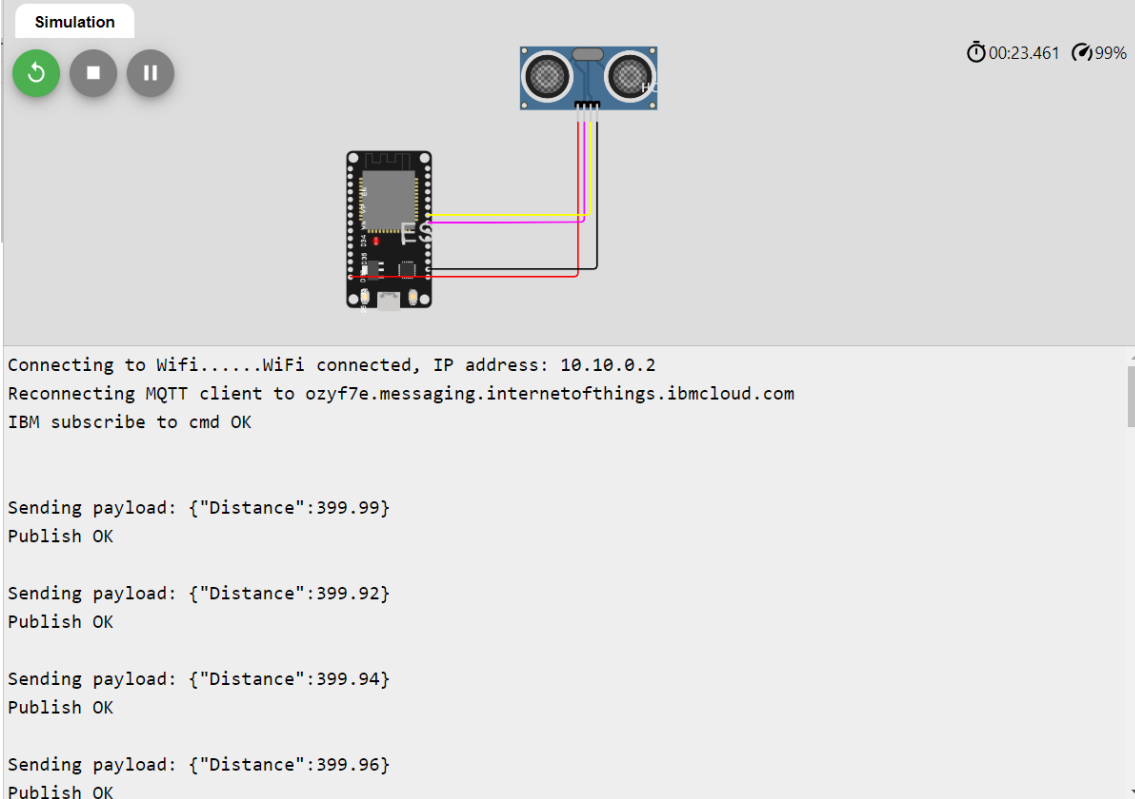

```
Connecting to Wifi.....WiFi connected, IP address: 10.10.0.2
Reconnecting MQTT client to ozyf7e.messaging.internetofthings.ibmcloud.com
IBM subscribe to cmd OK

Sending payload: {"Distance":399.99}
Publish OK

Sending payload: {"Distance":399.92}
Publish OK

Sending payload: {"Distance":399.94}
Publish OK

Sending payload: {"Distance":399.96}
Publish OK
```

Cloud image:

Browse Action Device Types Interfaces

Add Device +

	Device ID	Status	Device Type	Class ID	Date Added	
▼	123	Connected	jeni	Device	Nov 7, 2022 10:15 AM	→ ...

Identity

Device Information

Recent Events

State

Logs

×

The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
shreedharen	{"Distance":399.92}	json	a few seconds ago
shreedharen	{"Distance":399.96}	json	a few seconds ago
shreedharen	{"Distance":399.96}	json	a few seconds ago
shreedharen	{"Distance":399.92}	json	a few seconds ago
shreedharen	{"Distance":399.96}	json	a few seconds ago