


REVISIONS В DESCRIPTION 31MAR11 | RK | HMR C1 | REVISED PER ECO-11-005033

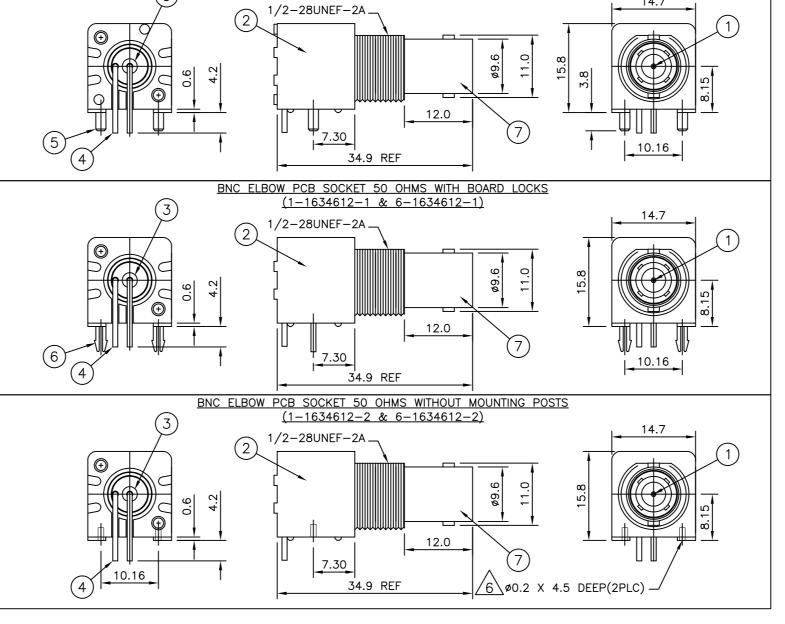

| | | | 1 | 1 | 1 | 1 | 1 | 1 | PBT BLACK | HOUSING | | 2 | |
|-----------------------|---|-----------------------------|-----------------|-------------|---|-------------|-------------|-----------------|--------------|----------------------|----------|-------|--|
| | | | 1 | 1 | 1 | 1 | 1 | 1 | BRASS 3 | CONTACT | | 1 | |
| | | | 62 | 12 | 61 | 11 | 60 | 10 | MATERIAL | DESCRIP [*] | ΓΙΟΝ | ITEM | |
| | | | 2 | \triangle | 2 | \triangle | 2 | \triangle | | | | | |
| | | QUANTITY PER ASSY | | | | | | PARTS LIST | | | | | |
| THIS DRAWING IS A CO | DWN RITA ZUO CHK | 14 Fel | | | , | | 7 | TE Connectivity | | | | | |
| DIMENSIONS: | TOLERANCES UNLESS OTHERWISE SPECIFIED: | ANSON MA | 14 Feb | 2 09 N | IAME | | | | | | | | |
| mm | OTHERWISE SPECIFIED. | BOB ZHAC | | | BNC HIGH PROFILE R/A INSULATED PCB SOCKET | | | | | | | | |
| | | 108-112000 PPLICATION SPEC | | | 50 OHM BLACK | | | | | | | | |
| | 3 PLC ± - 4 PLC ± - ANGLES ± - | — | 'EC | | SIZE | CAGE C | | RAWING | | | RESTRICT | ED TO | |
| MATERIAL SEE TABLE | FINISH SEE TABLE | WEIGHT | _ | A | 42 | 007 | 79 (| <u>_</u> _1 | 634612 | | | | |
| SEE TABLE | | CUSTOMER | USTOMER DRAWING | | | | | | SCALE NTS SH | EET 1 OF 1 | REV | C 1 | |
| | | | | | | | | | | | | | |

1 1 1 1 1 1 ZINC DIECAST A BODY

_ _ _ _ _ 2 2 BRASS

1 1 1 1 1 BRASS

1 1 1 1 1 PE-606

| - |BRASS

1471-9 (3/11)

BOARD LOCK

SOLDER TAIL

INSULATOR

MOUNTING POST 5 4 3