## **Assignment 4**

Student Name	Hari Hara Suthan
Student Roll Number	814419106002
Marks	2

Write Code and connections in wokwi for ultrasonic sensor. whatever distance is less than 100 cms send "Alert" to ibm cloud aand display in device recent events.

```
Solution:
//Pins
const int TRIG_PIN = 7; const
int ECHO_PIN = 8;
//Anything over 400 cm (23200 us pulse) is "out of range" const
unsigned int MAX DIST = 23200;
void setup() {
// The Trigger pin will tell the sensor to range find
Pin Mode(TRIG_PIN, OUTPUT); digital
Write(TRIG_PIN, LOW);
//Set Echo pin as input to measure the duration of
//pulses coming back from the distance sensor
pinMode(ECHO_PIN, INPUT );
```

```
// We'll use the serial monitor to view the sensor output
Serial.begin(9600);
}
void loop() { unsigned
long t1; unsigned
long t2; unsigned
long pulse width;
float cm; float
inches;
// Hold the trigger pin high for at least 10 us
digitalWrite(TRIG_PIN, HIGH);
delayMicroseconds(10);
digitalWrite(TRIG PIN, LOW);
// Wait for pulse on echo pin while
(digitalRead( ECHO_PIN )==0 );
// Measure how long the echo pin was held high (pulse width)
// Note: the micros() counter will overflow after-70 min t1=
micros ();
 while (digitalRead(ECHO_PIN) == 1);
t2= micros (); pulse width = t2-t1;
// Calculate distance in centimeters and inches. The constants
//are found in the datasheet, and calculated from the assumed speed
```


```
// of sound in air at sea level (- 340m/s)
cm=pulse_Width / 58; inches =
pulse_width/148.0;
//
                 results
     Print
                          if
            out
(pulse_width >MAX _ DIST ){
Serial.println("Out of range");
} else {
Serial.println("*******************************);
Serial.print("The Measured Distance in cm: ");
Serial.println(cm);
if( cm < 100 ){
   //while(true){
   Serial.println("Alert!!");
   //}
}
Serial.print("*******************************);
}
//wait at least 1000ms before next measurement
Delay(1000);
}
```

## **Output:**

1.If the distance is less than 100 cms ,it alerts.

```
WOKWI B SAVE - A SHARE
                                                                                                                                                                                                   Docs (A
  hc-sr04.ino diagram json ● Library Manager ▼
                                                                                                            Simulation
                                                                                                                                                                                           ₫00:00.466 (%58%
          const int TRIG_PIN = 7;
const int ECHO_PIN = 8;
                                                                                                            5 🕕 🕞
          // Anything over 400 cm (23200 us pulse) is "out of range"
const unsigned int MAX_DIST = 23200;
                                                                                                                                                                          // The Trigger pin will tell the sensor to range find
pinMode(TRIG_PIN, OUTPUT);
digitalWrite(TRIG_PIN, IOW);
                                                                                                                                     OO UNO
            //Set Echo pin as input to measure the duration of
//pulses coming back from the distance sensor
pinWode(ECHO_PIN, IMPUT);
            // We'll use the serial monitor to view the sensor output
Serial.begin(9600);
                                                                                                                                          101:000 14121
          void loop() {
            unsigned long t1;
unsigned long t2;
unsigned long pulse_width;
float cm;
float inches;
                                                                                                         The Measured Distance in cm : 84.14
                                                                                                         M II 10
            // Hold the trigger pin high for at least 10 us
```

## 2.If the distance is more than 100 cms, it won't alert

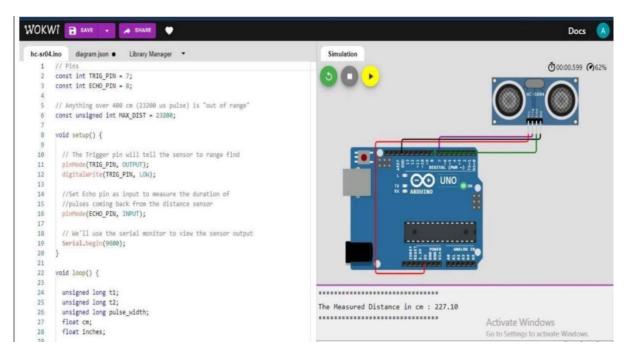

## 3. Simulation and code execution

