

Assignment - 4

WOKWI STIMULATOR

Assignment Date	03 November 2022
Student Name	Sanjay P D
Student Roll Number	412719104028

QUESTION:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events. Upload document with wokwi share link and images of ibm cloud.

CODE:

```
#include <WiFi.h>
#include <PubSubClient.h>
#include <ArduinoJson.h>

WiFiClient wifiClient;

#define ORG "ve0fh8"

#define DEVICE_TYPE "abcd"
#define DEVICE_ID "rasp"
#define TOKEN "12345678"
#define speed 0.034

char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/abcd_1/fmt/json";
char topic[] = "iot-2/cmd/home/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);
void publishData();

const int trigpin=5;
const int echopin=18;
String command;
String data="";
String lat="14.167589";
String lon="80.248510";
String name="point2";
```

```

String icon="";

long duration;
int dist;

void setup()
{
    Serial.begin(115200);
    pinMode(trigpin, OUTPUT);
    pinMode(echopin, INPUT);
    wifiConnect();
    mqttConnect();
}

void loop() {

    publishData();
    delay(500);

    if (!client.loop()) {
        mqttConnect();
    }
}

void wifiConnect() {
    Serial.print("Connecting to "); Serial.print("Wifi");
    WiFi.begin("Wokwi-GUEST", "", 6);
    while (WiFi.status() != WL_CONNECTED) {
        delay(500);
        Serial.print(".");
    }
    Serial.print("WiFi connected, IP address: ");
    Serial.println(WiFi.localIP());
}

void mqttConnect() {
    if (!client.connected()) {
        Serial.print("Reconnecting MQTT client to "); Serial.println(server);
        while (!client.connect(clientId, authMethod, token)) {
            Serial.print(".");
            delay(1000);
        }
        initManagedDevice();
        Serial.println();
    }
}

void initManagedDevice() {

```


```

    if (client.subscribe(topic)) {
        Serial.println(client.subscribe(topic));
        Serial.println("subscribe to cmd OK");
    } else {
        Serial.println("subscribe to cmd FAILED");
    }
}
void publishData()
{
    digitalWrite(trigpin, LOW);
    digitalWrite(trigpin, HIGH);
    delayMicroseconds(10);
    digitalWrite(trigpin, LOW);
    duration=pulseIn(echopin, HIGH);
    dist=duration*speed/2;

    if(dist<100){
        dist=100-dist;
        icon="fa-trash";
    }else{
        dist=0;
        icon="fa-trash-o";
    }
    DynamicJsonDocument doc(1024);
    String payload;
    doc["Name"]=name;
    doc["Latitude"]=lat;
    doc["Longitude"]=lon;
    doc["Icon"]=icon;
    doc["FillPercent"]=dist;
    serializeJson(doc, payload);
    delay(3000);
    Serial.print("\n");
    Serial.print("Sending payload: ");
    Serial.println(payload);
    if (client.publish(publishTopic, (char*) payload.c_str())) {
        Serial.println("Publish OK");
    } else {
        Serial.println("Publish FAILED");
    }
}
}

```

CONNECTIONS:

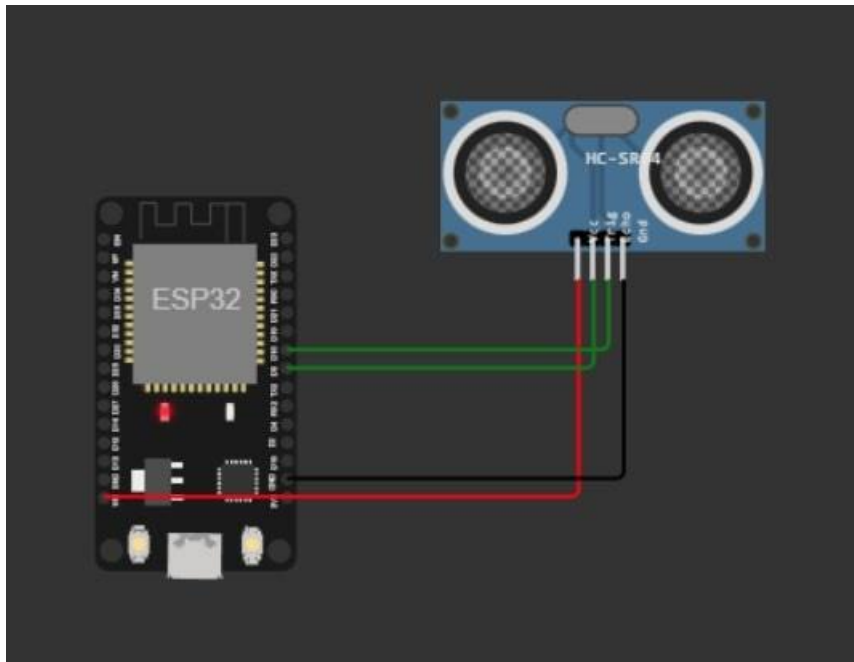

WOKWI LINK:

<https://wokwi.com/projects/347284942179271251>

OUTPUT:

WOKWI Ultra sonic sensor copy Docs

sketch.ino diagram.json libraries.txt Library Manager

```
1 #include <WiFi.h>
2 #include <PubSubClient.h>
3 #include <ArduinoJson.h>
4
5 WiFiClient wifiClient;
6
7 #define ORG "ve0fh8"
8 #define DEVICE_TYPE "abcd"
9 #define DEVICE_ID "rasp"
10 #define TOKEN "12345678"
11 #define speed 0.034
12
13 char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
14 char publishTopic[] = "iot-2/evt/abcd_1/fmt/json";
15 char topic[] = "iot-2/cmd/home/fmt/String";
16 char authMethod[] = "use-token-auth";
17 char token[] = TOKEN;
18 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
19 PubSubClient client(server, 1883, wifiClient);
20 void publishData();
21
22 const int trigpin=5;
23 const int echopin=18;
24 String command;
25 String data="";
26 String lat="14.167589";
27 String lon="80.248510";
28 String name="point2";
29 String icon="";
30
31 long duration;
32 int dist;
33
34 void setup()
35 {
```

Simulation

00:09.933

o", "FillPercent": 0}

Publish OK

Sending payload:

{ "Name": "point2", "Latitude": "14.167589", "Longitude": "80.248510", "Icon": "fa-trash-o", "FillPercent": 0 }

Publish OK

Show de

IBM Watson IoT Platform 412719104028@smartinternz.com ID: ve0fh8

Browse Action Device Types Interfaces

Add Device

Search by Device ID

Device Simulator

Device ID	Status	Device Type	Class ID	Date Added	Descriptive Location
abcd_1	Connected	abcd	Device	Nov 3, 2022 11:38 AM	

Identity Device Information Recent Events State Logs

The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
event_1	{"Alert Distance": 66}	json	a few seconds ago
event_1	{"Alert Distance": 38}	json	a few seconds ago
event_1	{"Alert Distance": 65}	json	a few seconds ago
event_1	{"Alert Distance": 72}	json	a few seconds ago
event_1	{"Alert Distance": 39}	json	a few seconds ago

1 Simulation running

Show desktop