Assignment -4 WOKWI

Assignment Date	26 October 2022
Student Name	Vignesh N
Student Roll Number	412719104042

QUESTION:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events. Upload document with wokwi share link and images of ibm cloud.


CODE:

```
#include <WiFi.h>
#include <PubSubClient.h>
#include <ArduinoJson.h>
WiFiClient wifiClient;
#define ORG "fvdupc"
#define DEVICE TYPE "abcd"
#define DEVICE ID "rasp"
#define TOKEN "12345678"
#define speed 0.034
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/abcd_1/fmt/json";
char topic[] = "iot-2/cmd/home/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE TYPE ":" DEVICE ID;
PubSubClient client(server, 1883, wifiClient);
void publishData();
const int trigpin=5;
const int echopin=18;
String command;
String data="";
String lat="14.167589";
String lon="80.248510";
String name="point2";
String icon="";
long duration;
int dist;
```

```
void setup()
  Serial.begin(115200);
  pinMode(trigpin, OUTPUT);
  pinMode(echopin, INPUT);
  wifiConnect();
  mqttConnect();
}
void loop() {
  publishData();
  delay(500);
  if (!client.loop()) {
    mqttConnect();
  }
}
void wifiConnect() {
  Serial.print("Connecting to "); Serial.print("Wifi");
  WiFi.begin("Wokwi-GUEST", "", 6);
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  }
  Serial.print("WiFi connected, IP address: ");
Serial.println(WiFi.localIP());
}
void mqttConnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting MQTT client to "); Serial.println(server);
    while (!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
      delay(1000);
    }
    initManagedDevice();
    Serial.println();
  }
}
void initManagedDevice() {
  if (client.subscribe(topic)) {
     Serial.println(client.subscribe(topic));
    Serial.println("subscribe to cmd OK");
  } else {
```

```
Serial.println("subscribe to cmd FAILED");
  }
}
void publishData()
{
  digitalWrite(trigpin,LOW);
  digitalWrite(trigpin, HIGH);
  delayMicroseconds(10);
  digitalWrite(trigpin,LOW);
  duration=pulseIn(echopin,HIGH);
  dist=duration*speed/2;
  if(dist<100){</pre>
    dist=100-dist;
    icon="fa-trash";
  }else{
    dist=0;
    icon="fa-trash-o";
  DynamicJsonDocument doc(1024);
  String payload;
  doc["Name"]=name;
  doc["Latitude"]=lat;
  doc["Longitude"]=lon;
  doc["Icon"]=icon;
  doc["FillPercent"]=dist;
  serializeJson(doc, payload);
  delay(3000);
  Serial.print("\n");
  Serial.print("Sending payload: ");
  Serial.println(payload);
  if (client.publish(publishTopic, (char*) payload.c_str())) {
   Serial.println("Publish OK");
  } else {
    Serial.println("Publish FAILED");
  }
}
```

CONNECTIONS:

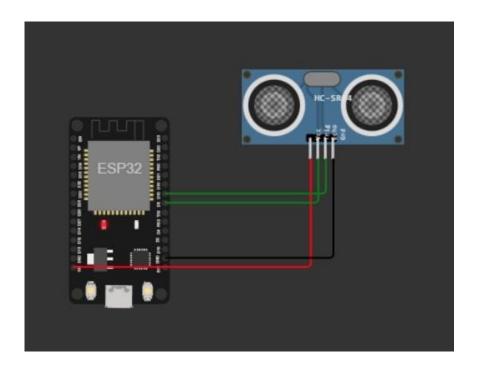

WOKWI LINK:

https://wokwi.com/projects/346590330080985684

OUTPUT:

