

Assignment - 4

WOKWI STIMULATOR

Assignment Date	26 October 2022
Student Name	Kishore Anand S
Student Roll Number	412719104016

QUESTION:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events. Upload document with wokwi share link and images of ibm cloud.

CODE:

```
#include <WiFi.h>
#include <PubSubClient.h>
#include <ArduinoJson.h>

WiFiClient wifiClient;

#define ORG "1bk1kq"
#define DEVICE_TYPE "abcd"
#define DEVICE_ID "rasp"
#define TOKEN "12345678"
#define speed 0.034

char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/abcd_1/fmt/json";
char topic[] = "iot-2/cmd/home/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);
void publishData();

const int trigpin=5;
const int echopin=18;
String command;
String data="";
String lat="14.167589";
String lon="80.248510";
String name="point2";
```

```

String icon="";

long duration;
int dist;

void setup()
{
    Serial.begin(115200);
    pinMode(trigpin, OUTPUT);
    pinMode(echopin, INPUT);
    wifiConnect();
    mqttConnect();
}

void loop() {

    publishData();
    delay(500);

    if (!client.loop()) {
        mqttConnect();
    }
}

void wifiConnect() {
    Serial.print("Connecting to "); Serial.print("Wifi");
    WiFi.begin("Wokwi-GUEST", "", 6);
    while (WiFi.status() != WL_CONNECTED) {
        delay(500);
        Serial.print(".");
    }
    Serial.print("WiFi connected, IP address: ");
    Serial.println(WiFi.localIP());
}

void mqttConnect() {
    if (!client.connected()) {
        Serial.print("Reconnecting MQTT client to "); Serial.println(server);
        while (!client.connect(clientId, authMethod, token)) {
            Serial.print(".");
            delay(1000);
        }
        initManagedDevice();
        Serial.println();
    }
}

void initManagedDevice() {

```


```

    if (client.subscribe(topic)) {
        Serial.println(client.subscribe(topic));
        Serial.println("subscribe to cmd OK");
    } else {
        Serial.println("subscribe to cmd FAILED");
    }
}
void publishData()
{
    digitalWrite(trigpin, LOW);
    digitalWrite(trigpin, HIGH);
    delayMicroseconds(10);
    digitalWrite(trigpin, LOW);
    duration=pulseIn(echopin, HIGH);
    dist=duration*speed/2;

    if(dist<100){
        dist=100-dist;
        icon="fa-trash";
    }else{
        dist=0;
        icon="fa-trash-o";
    }
    DynamicJsonDocument doc(1024);
    String payload;
    doc["Name"]=name;
    doc["Latitude"]=lat;
    doc["Longitude"]=lon;
    doc["Icon"]=icon;
    doc["FillPercent"]=dist;
    serializeJson(doc, payload);
    delay(3000);
    Serial.print("\n");
    Serial.print("Sending payload: ");
    Serial.println(payload);
    if (client.publish(publishTopic, (char*) payload.c_str())) {
        Serial.println("Publish OK");
    } else {
        Serial.println("Publish FAILED");
    }
}
}

```

CONNECTIONS:

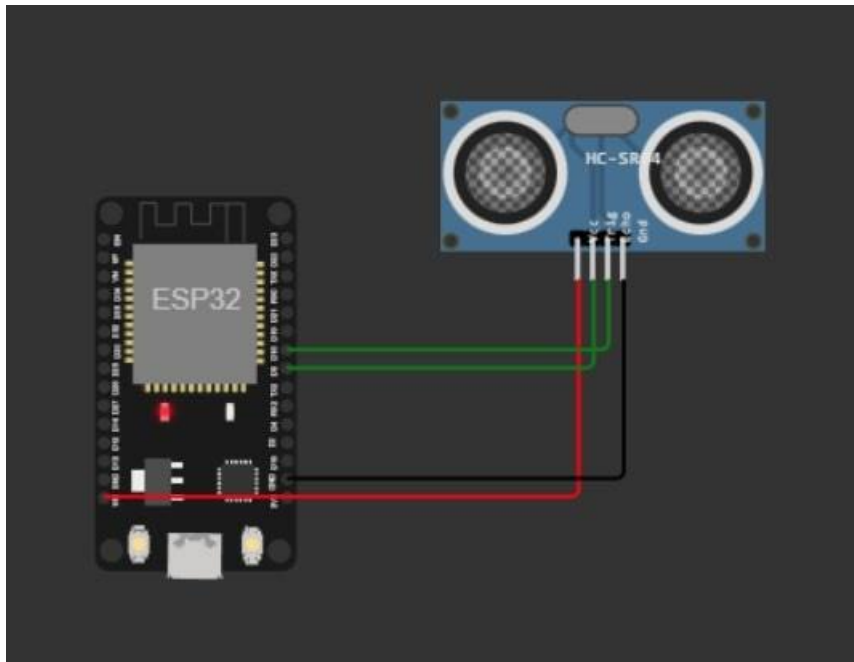

WOKWI LINK:

<https://wokwi.com/projects/346587874175484499>

OUTPUT:

The screenshot shows the Wokwi IDE interface. On the left, the 'sketch.ino' file contains the following code:

```
1 #include <PubSubClient.h>
2 #include <ArduinoJson.h>
3
4
5 WiFiClient wifiClient;
6
7 #define ORG "1bk1kq"
8 #define DEVICE_TYPE "abcd"
9 #define DEVICE_ID "rasp"
10 #define TOKEN "12345678"
11 #define speed 0.034
12
13 char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
14 char publishTopic[] = "iot-2/evt/abcd_1/fmt/json";
15 char topic[] = "iot-2/cmd/home/fmt/string";
16 char authMethod[] = "use-token-auth";
17 char token[] = TOKEN;
18 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
19 PubSubClient client(server, 1883, wifiClient);
20 void publishData();
21
22 const int trigPin=5;
23 const int echopin=18;
24 String command;
25 String data="";
26 String lat="14.167589";
27 String lon="80.248510";
28 String name="point2";
29 String icon="";
30
31 long duration;
32 int dist;
33
34 void setup()
35 {
36   Serial.begin(115200);
```

On the right, the 'Simulation' window shows a visual representation of the ESP32 microcontroller connected to an HC-SR04 ultrasonic sensor. Below the simulation, the console output shows the following messages:

```
o", "FillPercent":0}
Publish OK

Sending payload:
{"Name":"point2","Latitude":"14.167589","Longitude":"80.248510","Icon":"fa-trash-o", "FillPercent":0}
Publish OK
```

The screenshot shows the IBM Watson IoT Platform dashboard. The top navigation bar includes 'Browse', 'Action', 'Device Types', and 'Interfaces'. The main content area displays the details for a device named 'abcd_1', which is in a 'Connected' state. The 'Recent Events' tab is selected, showing a list of events received from the device.

Event	Value	Format	Last Received
event_1	{"Alert Distance":83}	json	a few seconds ago
event_1	{"Alert Distance":59}	json	a few seconds ago
event_1	{"Alert Distance":7}	json	a few seconds ago
event_1	{"Alert Distance":30}	json	a few seconds ago
event_1	{"Alert Distance":51}	json	a few seconds ago