

## ASSIGNMENT – 4

### Ultrasonic sensor simulation in Wokwi

Date	25 October 2022
Student Name	Vignesh J
Student Roll Number	711719106040
Maximum Marks	2 marks

#### QUESTION:

Write code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100 cms send an "alert" to the IBM cloud and display in the device recent events

#### CODE:

```
#include <WiFi.h> #include
<PubSubClient.h>
void callback(char* subscribtopic, byte* payload, unsigned int payloadLength);
//-----credentials of IBM Accounts-----
#define ORG "5bfis0"//IBM ORGANITION ID
#define DEVICE_TYPE "abcd"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "1234"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "12345678" //Token
String data3;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json"; char
subscribtopic[] = "iot-2/cmd/test/fmt/String"; char authMethod[]
= "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient);
const int trigPin = 5; const int echoPin = 18;
#define SOUND_SPEED 0.034
long duration;
float distance;
void setup() {
Serial.begin(
115200);
```

```

pinMode(trig
Pin,
OUTPUT);
pinMode(ech
oPin,
INPUT);
wifiConnect(); mqttConnect();
} void
loop() {
digitalWrite(trigPin, LOW);
delayMicroseconds(2);
digitalWrite(trigPin, HIGH);
delayMicroseconds(10);
digitalWrite(trigPin, LOW); duration =
pulseIn(echoPin, HIGH); distance =
duration * SOUND_SPEED/2;
Serial.print("Distance (cm): ");
Serial.println(distance); if(distance<100)
{
Serial.println("ALERT!!");
delay(1000);
PublishData(distance);
delay(1000); if
(!client.loop()) {
mqttConnect();
} }
delay(1000);
}
void PublishData(float dist) { mqttConnect();
String payload = "{\"Distance\":"; payload
+= dist;
payload += "\",\"ALERT!!\":"; payload += "\"Distance less than 100cms\":";
payload += "\"}";
Serial.print("Sending payload: ");
Serial.println(payload);

if (client.publish(publishTopic, (char*) payload.c_str())) {
Serial.println("Publish ok");
} else {
Serial.println("Publish failed");
} }
void mqttConnect() { if
(!client.connected()) {


```

```

Serial.print("Reconnect
ing client to ");
Serial.println(server);
while (!client.connect(clientId, authMethod, token)) {
Serial.print("."); delay(500);
}
initManagedDevice();
Serial.println();
} }
void wificonnect()
{
Serial.println();
Serial.print("Connecting      to      ");
WiFi.begin("Wokwi-GUEST", "", 6); while
(WiFi.status() != WL_CONNECTED) {
delay(500);
Serial.print(".");
}
Serial.println("");
Serial.println("WiFi connected");
Serial.println("IP address: ");
Serial.println(WiFi.localIP());
}
void initManagedDevice() { if
(client.subscribe(subscribetopic)) {
Serial.println((subscribetopic));
Serial.println("subscribe to cmd OK");
} else {
Serial.println("subscribe to cmd FAILED");
} }
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic); for (int i
= 0; i < payloadLength; i++) {
//Serial.print((char)payload[i]); data3
+= (char)payload[i];
}
Serial.println("data: " + data3);
data3="";

```

**CIRCUIT DIAGRAM:**

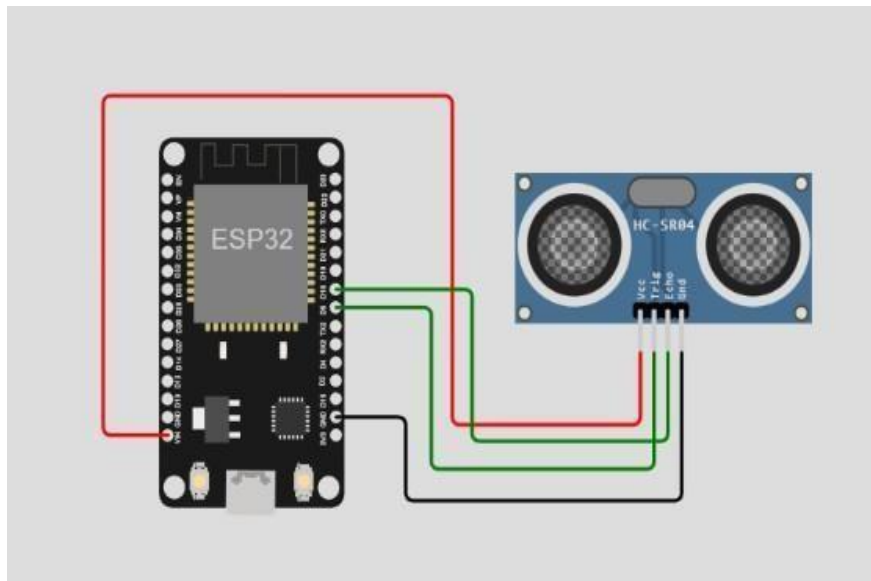

**Wokwi simulation link:**

<https://wokwi.com/projects/3471910302342190>

**WOKWI OUTPUT:**

```
Distance (cm): 399.92
Distance (cm): 399.96
Distance (cm): 399.94
Distance (cm): 399.98
Distance (cm): 399.94
Distance (cm): 399.92
Distance (cm): 399.94
```

**IBM CLOUD OUTPUT:**

X

Event	Value	Format	Last Received
-------	-------	--------	---------------

event_1	{"distance":7,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":8,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago