

#### Assignment - 4

Assignment Date	22 October 2022
Student Name	KALAI YARASAN S
Student Roll Number	611819106015
Maximum Marks	2 Marks

##### Question-1:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "Alert" to ibm cloud and display in device recent events.

##### Solution:

```
// Pins
const int TRIG_PIN = 7;
const int ECHO_PIN = 8;

// Anything over 400 cm (23200 us pulse) is "out of range"
const unsigned int MAX_DIST = 23200;

void setup() {

  // The Trigger pin will tell the sensor to range find
  pinMode(TRIG_PIN, OUTPUT);
  digitalWrite(TRIG_PIN, LOW);

  //Set Echo pin as input to measure the duration of
  //pulses coming back from the distance sensor
  pinMode(ECHO_PIN, INPUT);

  // We'll use the serial monitor to view the sensor output
  Serial.begin(9600);
}

void loop() {

  unsigned long t1;
  unsigned long t2;
  unsigned long pulse_width;
  float cm;
  float inches;

  // Hold the trigger pin high for at least 10 us
```

```

digitalWrite(TRIG_PIN, HIGH);
delayMicroseconds(10);
digitalWrite(TRIG_PIN, LOW);

// Wait for pulse on echo pin
while ( digitalRead(ECHO_PIN) == 0 );

// Measure how long the echo pin was held high (pulse width)
// Note: the micros() counter will overflow after ~70 min
t1 = micros();
while ( digitalRead(ECHO_PIN) == 1);
t2 = micros();
pulse_width = t2 - t1;

// Calculate distance in centimeters and inches. The constants
// are found in the datasheet, and calculated from the assumed speed
// of sound in air at sea level (~340 m/s).
cm = pulse_width / 58.0;
inches = pulse_width / 148.0;

// Print out results
if ( pulse_width > MAX_DIST ) {
  Serial.println("Out of range");
} else {
  Serial.println("*****");
  Serial.print("The Measured Distance in cm : ");
  Serial.println(cm);

  if(cm<100){
    // while(true){
    Serial.println("Alert!!");
    // }
  }

  Serial.print("*****");
}

// Wait at least 1000ms before next measurement
delay(1000);
}

```

## Output:

1) If the distance is less than 100 cms , it alerts.

WOKWI

SAVE SHARE

Docs

hc-sr04.ino diagram.json Library Manager

```
1 // Pins
2 const int TRIG_PIN = 7;
3 const int ECHO_PIN = 8;
4
5 // Anything over 400 cm (23200 us pulse) is "out of range"
6 const unsigned int MAX_DIST = 23200;
7
8 void setup() {
9
10 // The Trigger pin will tell the sensor to range find
11 pinMode(TRIG_PIN, OUTPUT);
12 digitalWrite(TRIG_PIN, LOW);
13
14 //Set Echo pin as input to measure the duration of
15 //pulses coming back from the distance sensor
16 pinMode(ECHO_PIN, INPUT);
17
18 // We'll use the serial monitor to view the sensor output
19 Serial.begin(9600);
20 }
21
22 void loop() {
23
24 unsigned long t1;
25 unsigned long t2;
26 unsigned long pulse_width;
27 float cm;
28 float inches;
29
30 // Hold the trigger pin high for at least 10 us
```

Simulation

00:00.466 58%

Editing Ultrasonic Distance Sensor

Distance: 83cm

UNO

ARDUINO

\*\*\*\*\*

The Measured Distance in cm : 84.14

Alert!!

\*\*\*\*\*

Activate Windows

Go to Settings to activate Windows.

2) If the distance is more than 100 cms, it won't alert.

WOKWI

SAVE SHARE

Docs

hc-sr04.ino diagram.json Library Manager

```
1 // Pins
2 const int TRIG_PIN = 7;
3 const int ECHO_PIN = 8;
4
5 // Anything over 400 cm (23200 us pulse) is "out of range"
6 const unsigned int MAX_DIST = 23200;
7
8 void setup() {
9
10 // The Trigger pin will tell the sensor to range find
11 pinMode(TRIG_PIN, OUTPUT);
12 digitalWrite(TRIG_PIN, LOW);
13
14 //Set Echo pin as input to measure the duration of
15 //pulses coming back from the distance sensor
16 pinMode(ECHO_PIN, INPUT);
17
18 // We'll use the serial monitor to view the sensor output
19 Serial.begin(9600);
20 }
21
22 void loop() {
23
24 unsigned long t1;
25 unsigned long t2;
26 unsigned long pulse_width;
27 float cm;
28 float inches;
29
30 // Hold the trigger pin high for at least 10 us
```

Simulation

00:00.599 62%

UNO

ARDUINO

\*\*\*\*\*




The Measured Distance in cm : 227.10

\*\*\*\*\*

Activate Windows

Go to Settings to activate Windows.

### 3) Simulation and code execution

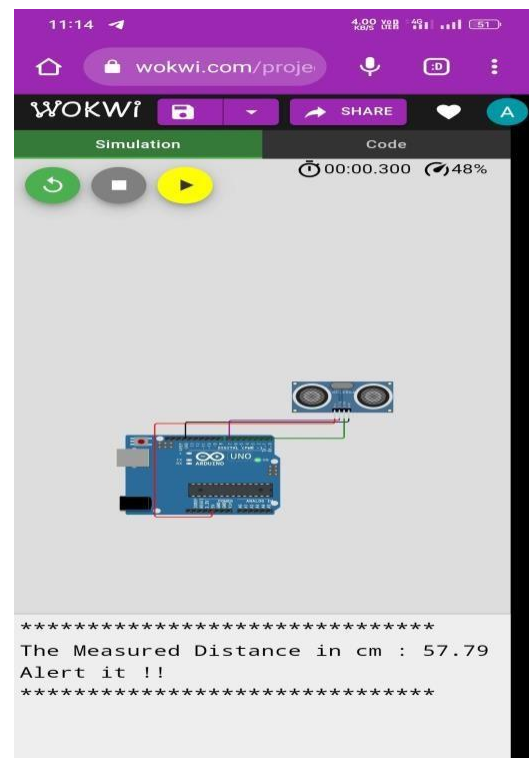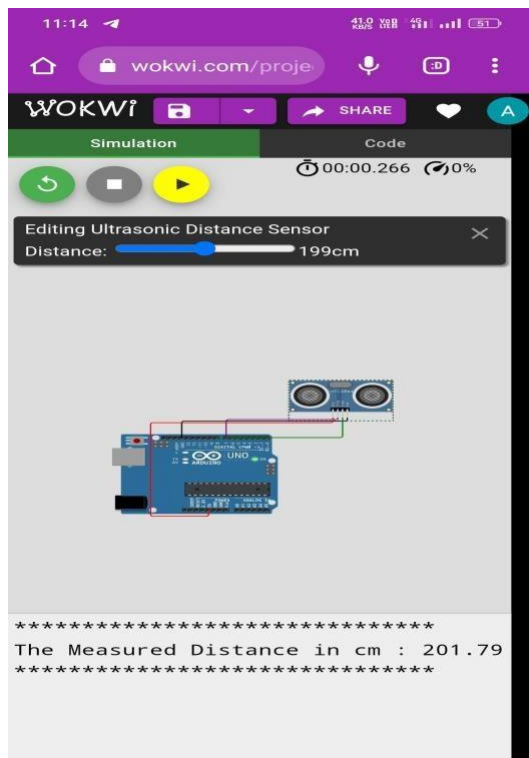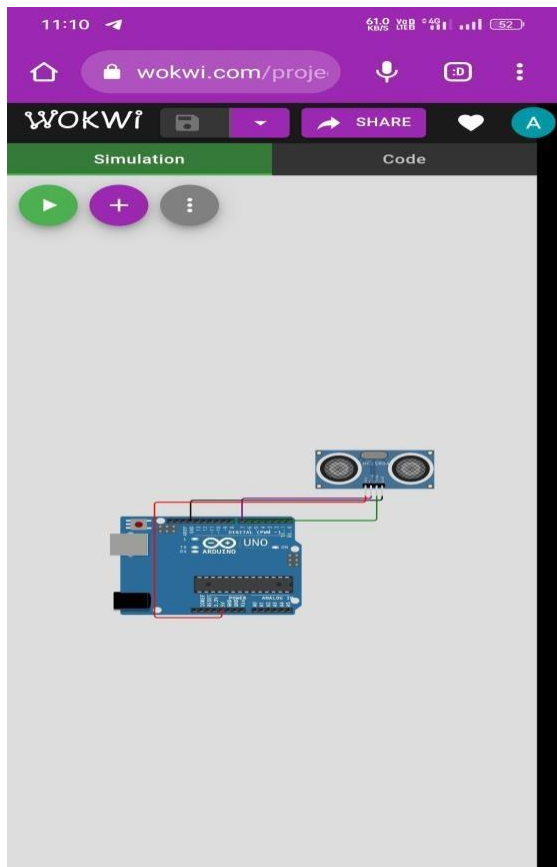

**Project Link:**

<https://wokwi.com/projects/346136429340918356>