

KARTHICK V

210519104047

Question :

Write a code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100cms send an "Alert" to IBM cloud and display in the device recent events.

Code:

```
#include <WiFi.h>
#include <PubSubClient.h>
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);
//-----credentials of IBM Accounts-----
#define ORG "y2pst8"//IBM ORGANITION ID
#define DEVICE_TYPE "EPS32"//Device type mentioned in ibmwatson IOT
Platform

#define DEVICE_ID "IBM07"//Device ID mentioned in ibm watson IOT Platform

#define TOKEN "JrH2D2A)VcaOpzSw)X" //Token
String data3;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";

char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; WiFiClient
wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient); const int trigPin
= 5;
const int echoPin = 18;
#define SOUND_SPEED 0.034
long duration;
float distance;
void setup() {
  Serial.begin(115200);
  pinMode(trigPin, OUTPUT);
  pinMode(echoPin, INPUT);
  wificonnect();
  mqttconnect();
}
void loop()
{
  digitalWrite(trigPin, LOW);
  delayMicroseconds(2);
```

```

digitalWrite(trigPin, HIGH);
delayMicroseconds(10);
digitalWrite(trigPin, LOW);
duration = pulseIn(echoPin, HIGH);
distance = duration * SOUND_SPEED/2; Serial.print("Distance (cm): ");
Serial.println(distance);
if(distance<100)
{
    Serial.println("ALERT!!");
    delay(1000);

    PublishData(distance);

    delay(1000);
    if (!client.loop()) {
        mqttconnect();
    }
    delay(1000);
}
void PublishData(float dist) {
    mqttconnect();
    String payload = "{\"Distance\": ";
    payload += dist;
    payload += ", \"ALERT!!\": \"\" \"Distance less than 100cms\" \"\""; payload += "}";
    Serial.print("Sending payload: "); Serial.println(payload);

    if (client.publish(publishTopic, (char*) payload.c_str())) {
        Serial.println("Publish ok");
    } else {
        Serial.println("Publish failed");
    }
}

void mqttconnect() {
    if (!client.connected()) {
        Serial.print("Reconnecting client to "); Serial.println(server);
        while (!client.connect(clientId, authMethod, token)) {
            Serial.print(".");
            delay(500);
        }
    }

    initManagedDevice();

    Serial.println();
}

void wificonnect()
{
    Serial.println(); Serial.print("Connecting to "); WiFi.begin("Wokwi-
GUEST", "", 6); while (WiFi.status() != WL_CONNECTED) { delay(500);

```

```

Serial.print(".");
}
Serial.println(""); Serial.println("WiFi
connected"); Serial.println("IP address: ");
Serial.println(WiFi.localIP());
}
void initManagedDevice() {
if (client.subscribe(subscribetopic)) {
Serial.println((subscribetopic)); Serial.println("subscribe to
cmd OK");
} else {
Serial.println("subscribe to cmd FAILED");
}
}
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength) {
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic);
for (int i = 0; i < payloadLength; i++) {

//Serial.print((char)payload[i]);

data3 += (char)payload[i];
}
Serial.println("data: "+ data3); data3="";

}

```

Diagram.json:

```

{
"version": 1,
"author": "sweetysharon", "editor": "wokwi", "parts": [

{ "type": "wokwi-esp32-devkit-v1", "id": "esp", "top": -4.67, "left": -
114.67, "attrs": {} },

{ "type": "wokwi-hc-sr04", "id": "ultrasonic1", "top": 15.96, "left":
89.17, "attrs": {} } ],

"connections": [
[ "esp:TX0", "$serialMonitor:RX", "", [] ], [ "esp:RX0",
"$serialMonitor:TX", "", [] ], [

"esp:VIN",
"ultrasonic1:VCC",
"red",
[ "h-37.16", "v-178.79", "h200", "v173.33", "h100.67" ]

],
[ "esp:GND.1", "ultrasonic1:GND", "black", [ "h39.87", "v44.04", "h170" ]
], [ "esp:D5", "ultrasonic1:TRIG", "green", [ "h54.54", "v85.07",

```


```
"h130.67" ] ], [ "esp:D18", "ultrasonic1:ECHO", "green", [ "h77.87",
"v80.01", "h110" ] ]

] }
```

Wokwi simulation link:

<https://wokwi.com/projects/347834044543664723>

Circuit Diagram:

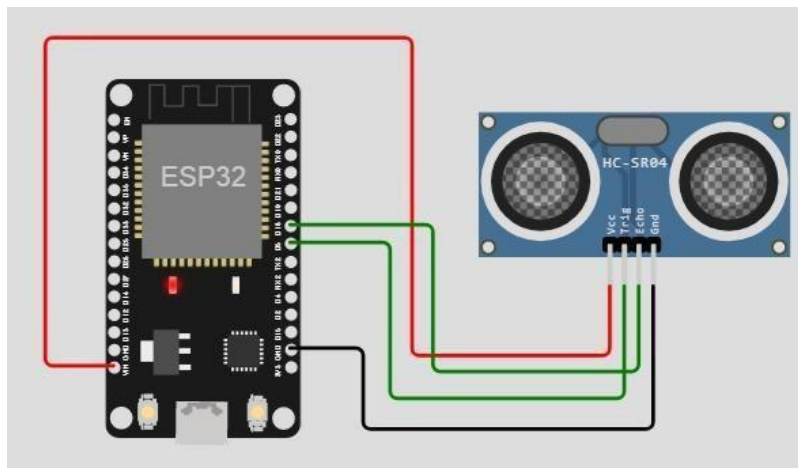

Output:

Wokwi output:

```
Connecting to ....
WiFi connected
IP address:
10.10.0.2
Reconnecting client to ytluse.messaging.internetofthings.ibmcloud.com
iot-2/cmd/test/fmt/String
subscribe to cmd OK

Distance (cm): 399.92
Distance (cm): 399.96
Distance (cm): 399.94
Distance (cm): 399.98
Distance (cm): 399.94
Distance (cm): 399.92
Distance (cm): 399.94
```

IBM cloud output:

Identity	Device Information	Recent Events	State	Logs	X
<p>The recent events listed show the live stream of data that is coming and going from this device.</p>					
Event	Value	Format	Last Received		
event_1	{"distance":7,"Alert":"","Distance less than 10"}	json	a few seconds ago		
event_1	{"distance":9,"Alert":"","Distance less than 10"}	json	a few seconds ago		
event_1	{"distance":8,"Alert":"","Distance less than 10"}	json	a few seconds ago		
event_1	{"distance":9,"Alert":"","Distance less than 10"}	json	a few seconds ago		