

ASSIGNMENT-4

DISTANCE DETECTION USING ULTRASONIC SENSOR

Date	27 October 2022
Team ID	PNT2022TMID25602
Maximum Marks	2 Marks

Question1:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cm send "alert" to IBM cloud and display in device recent events.

CODE:

```
#include <WiFi.h>
#include <PubSubClient.h>
WiFiClient wifiClient;
String data3;
#define ORG "4yi0vc"
#define DEVICE_TYPE "nodeMcu"
#define DEVICE_ID "Assignment4"
#define TOKEN "123456789"
#define speed 0.034
#define led 14
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char topic[] = "iot-2/cmd/home/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);
void publishData();

const int trigpin=5;
const int echopin=18;
String command;
String data="";

long duration;
float dist;
```

```
void setup()
{
  Serial.begin(115200);
  pinMode(led, OUTPUT);
  pinMode(trigpin, OUTPUT);
  pinMode(echopin, INPUT);
  wifiConnect();
  mqttConnect();
}
```

```
void loop() {
  bool isNearby = dist < 100;
  digitalWrite(led, isNearby);

  publishData();
  delay(500);

  if (!client.loop()) {
    mqttConnect();
  }
}
```

```
void wifiConnect() {
  Serial.print("Connecting to "); Serial.print("Wifi");
  WiFi.begin("Wokwi-GUEST", "", 6);
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  }
  Serial.print("WiFi connected, IP address: "); Serial.println(WiFi.localIP());
}
```

```
void mqttConnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting MQTT client to "); Serial.println(server);
    while (!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
      delay(500);
    }
  }
}
```

```

}
  initManagedDevice();
  Serial.println();
}
}

void initManagedDevice() {
  if (client.subscribe(topic)) {
    // Serial.println(client.subscribe(topic));
    Serial.println("IBM subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}

void publishData()
{
  digitalWrite(trigpin,LOW);
  digitalWrite(trigpin,HIGH);
  delayMicroseconds(10);
  digitalWrite(trigpin,LOW);
  duration=pulseIn(echopin,HIGH);
  dist=duration*speed/2;
  if(dist<100){
    String payload = "{\"Normal Distance\":\"";
    payload += dist;
    payload += "\"}";

    Serial.print("\n");
    Serial.print("Sending payload: ");
    Serial.println(payload);
    if (client.publish(publishTopic, (char*) payload.c_str())) {
      Serial.println("Publish OK");
    }
  }

  if(dist>101 && dist<111){
    String payload = "{\"Alert distance\":\"";
    payload += dist;
    payload += "\"}";
  }
}

```

```

Serial.print("\n");
Serial.print("Sending payload: ");
Serial.println(payload);
if(client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Warning crosses 110cm -- it automatically of the loop");
    digitalWrite(led,HIGH);
}else {
    Serial.println("Publish FAILED");
}

}

}

void callback(char* subscribeTopic, byte* payload, unsigned int payloadLength){
Serial.print("callback invoked for topic:");
Serial.println(subscribeTopic);
for(int i=0; i<payloadLength; i++){
    dist += (char)payload[i];
}
Serial.println("data:" + data3);
if(data3=="lighton"){
    Serial.println(data3);
    digitalWrite(led,HIGH);
}
data3="";
}

```

```

1  #include <WiFi.h> //library for wifi
2  #include <PubSubClient.h> //library for MQTT
3
4
5  void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);
6
7  //-----credentials of IBM Accounts-----
8
9  #define ORG "4hn0jp" //IBM ORGANITION ID
10 #define DEVICE_TYPE "ULTRASON" //Device type mentioned in ibm watson IOT Platform
11 #define DEVICE_ID "DISTANCEDETECT" //Device ID mentioned in ibm watson IOT Platform
12 #define TOKEN "wuo5s7PR)ZSegVk8Rx" //Token
13 String data3;
14 float dist;
15
16
17 //----- Customise the above values -----
18 char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; // Server Name
19 char publishTopic[] = "iot-2/evt/Data/fmt/json"; // topic name and type of event perform and format in which data to be send
20 char subscribetopic[] = "iot-2/cmd/test/fmt/String"; // cmd REPRESENT command type AND COMMAND IS TEST OF FORMAT STRING
21 char authMethod[] = "use-token-auth"; // authentication method
22 char token[] = TOKEN;
23 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; //client id
24
25
26 //-----
27 WiFiClient wificlient; // creating the instance for wificlient
28 PubSubClient client(server, 1883, callback ,wificlient); //calling the predefined client id by passing parameter like server id,portand wificredential
29
30 int LED = 4;
31 int trig = 5;
32 int echo = 18;
33 void setup()
34 {
35     Serial.begin(115200);

```

esp32-blink.ino • diagram.json • libraries.txt • Library Manager ▼

```
36  pinMode(trig,OUTPUT);
37  pinMode(echo,INPUT);
38  pinMode(LED, OUTPUT);
39  delay(10);
40  wificonnect();
41  mqttconnect();
42  }
43  void loop()// Recursive Function
44  {
45
46      digitalWrite(trig,LOW);
47      digitalWrite(trig,HIGH);
48      delayMicroseconds(10);
49      digitalWrite(trig,LOW);
50      float dur = pulseIn(echo,HIGH);
51      float dist = (dur * 0.0343)/2;
52      Serial.print ("Distancein cm");
53      Serial.println(dist);
54
55
56      PublishData(dist);
57      delay(1000);
58      if (!client.loop()) {
59          mqttconnect();
60      }
61  }
62
63
64
65  /*.....retrieving to Cloud.....*/
66
67  void PublishData(float dist) {
68      mqttconnect();//function call for connecting to ibm
69      /*
70      | creating the String in in form JSON to update the data to ibm cloud
```

```

69 |
70 | | creating the String in in form JSON to update the data to ibm cloud
71 | */
72 | String object;
73 | if (dist <100)
74 | {
75 |     digitalWrite(LED,HIGH);
76 |     Serial.println("object is near");
77 |     object = "Near";
78 | }
79 | else
80 | {
81 |     digitalWrite(LED,LOW);
82 |     Serial.println("no object found");
83 |     object = "No";
84 | }
85 |
86 | String payload = "{\"distance\":";
87 | payload += dist;
88 | payload += ", \"object\":\":";
89 | payload += object;
90 | payload += "\"}";
91 |
92 |
93 | Serial.print("Sending payload: ");
94 | Serial.println(payload);
95 |
96 |
97 |
98 |

```

```

esp32-blink.ino • diagram.json • libraries.txt • Library Manager
98 |
99 | if (client.publish(publishTopic, (char*) payload.c_str())) {
100 |     Serial.println("Publish ok");// if it successfully upload data on the cloud then it will print publish ok in Serial monitor or else it will print publish failed
101 | } else {
102 |     Serial.println("Publish failed");
103 | }
104 |
105 | }
106 | void mqttconnect() {
107 |     if (!client.connected()) {
108 |         Serial.print("Reconnecting client to ");
109 |         Serial.println(server);
110 |         while (!client.connect(clientId, authMethod, token)) {
111 |             Serial.print(".");
112 |             delay(500);
113 |         }
114 |
115 |         initManagedDevice();
116 |         Serial.println();
117 |     }
118 | }
119 | void wificonnect() //function definition for wificonnect
120 | {
121 |     Serial.println();
122 |     Serial.print("Connecting to ");
123 |
124 |     WiFi.begin("Wokwi-GUEST", "", 0);//passing the wifi credentials to establish the connection
125 |     while (WiFi.status() != WL_CONNECTED) {
126 |         delay(500);
127 |         Serial.print(".");
128 |     }
129 |     Serial.println("");
130 |     Serial.println("Wifi connected");
131 |     Serial.println("IP address: ");
132 |     Serial.println(WiFi.localIP());

```


```
123
124   WiFi.begin("Wokwi-GUEST", "", 6); //passing the wifi credentials to establish the connection
125   while (WiFi.status() != WL_CONNECTED) {
126       delay(500);
127       Serial.print(".");
128   }
129   Serial.println("");
130   Serial.println("WiFi connected");
131   Serial.println("IP address: ");
132   Serial.println(WiFi.localIP());
133 }
134
135 void initManagedDevice() {
136     if (client.subscribe(subscribetopic)) {
137         Serial.println((subscribetopic));
138         Serial.println("subscribe to cmd OK");
139     } else {
140         Serial.println("subscribe to cmd FAILED");
141     }
142 }
143
144 void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
145 {
146
147     Serial.print("callback invoked for topic: ");
148     Serial.println(subscribetopic);
149     for (int i = 0; i < payloadLength; i++) {
150         //Serial.print((char)payload[i]);
151         data3 += (char)payload[i];
152     }
153
154     // Serial.println("data: "+ data3);
155     // if(data3=="Near")
156     // {
157     // Serial.println(data3);
158     // if(data3=="Near") {
159     //     Serial.println("Near");
160     // }
```

```


esp32-blink.ino • diagram.json • libraries.txt • Library Manager
142 }
143
144 void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
145 {
146
147     Serial.print("callback invoked for topic: ");
148     Serial.println(subscribetopic);
149     for (int i = 0; i < payloadLength; i++) {
150         //Serial.print((char)payload[i]);
151         data3 += (char)payload[i];
152     }
153
154     // Serial.println("data: "+ data3);
155     // if(data3=="Near")
156     // {
157     // Serial.println(data3);
158     // digitalWrite(LED,HIGH);
159
160     // }
161
162     // else
163     // {
164     // Serial.println(data3);
165     // digitalWrite(LED,LOW);
166
167     // }
168     data3="";
169
170
171 }

```


OUTPUT:

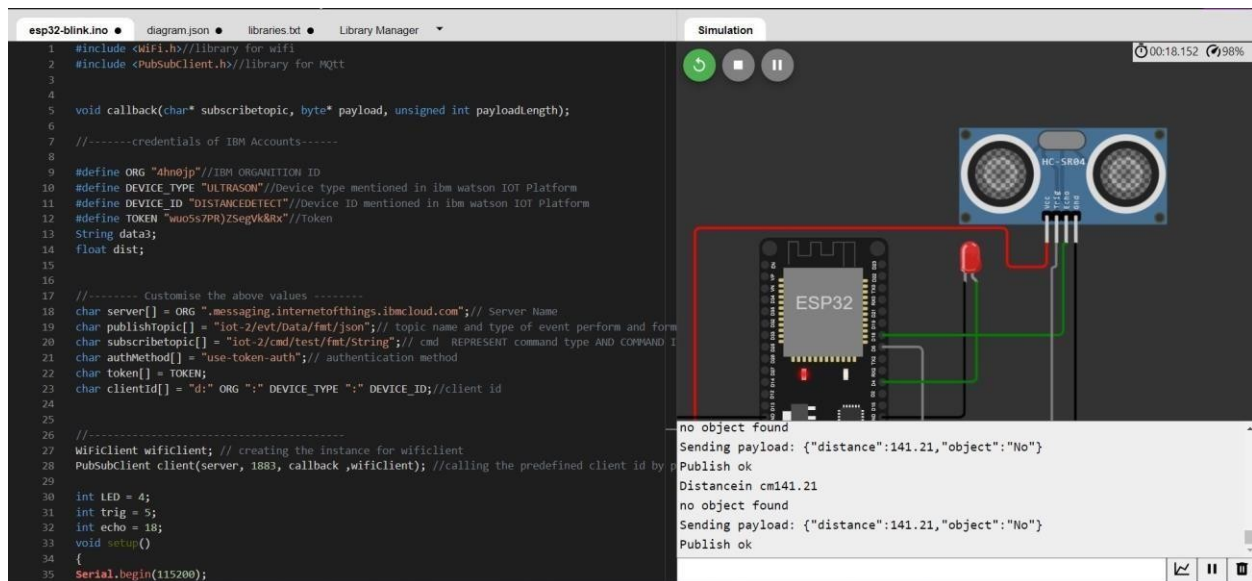

Data send to the IBM cloud device when the object is far

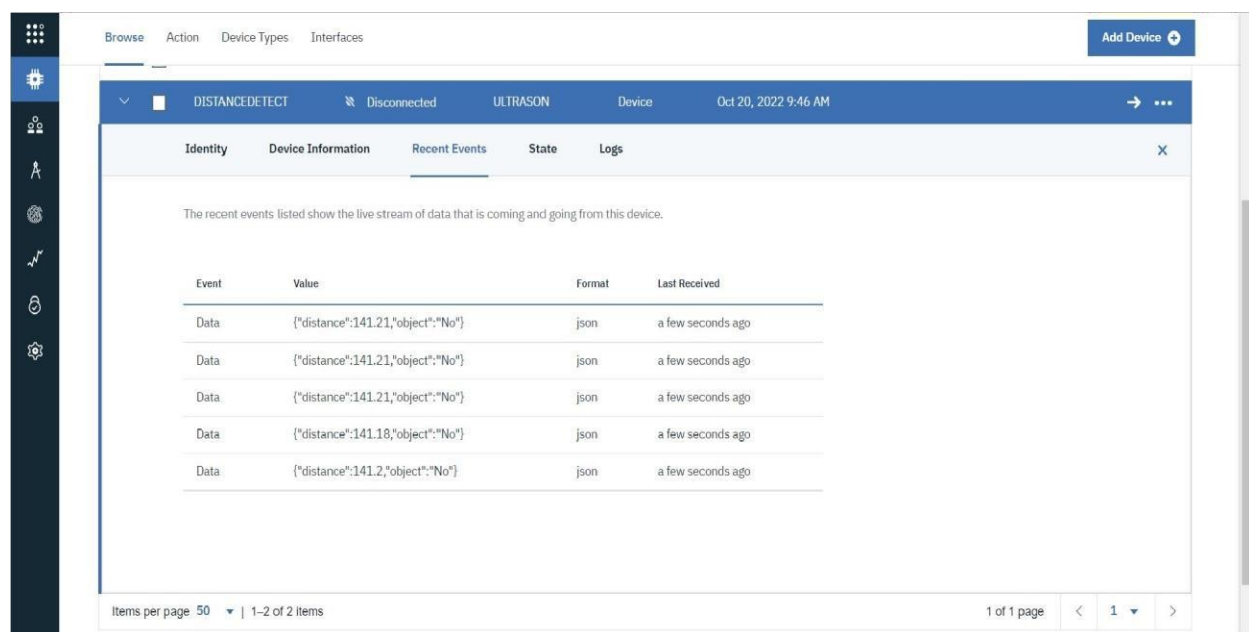


when object is near to the ultrasonic sensor

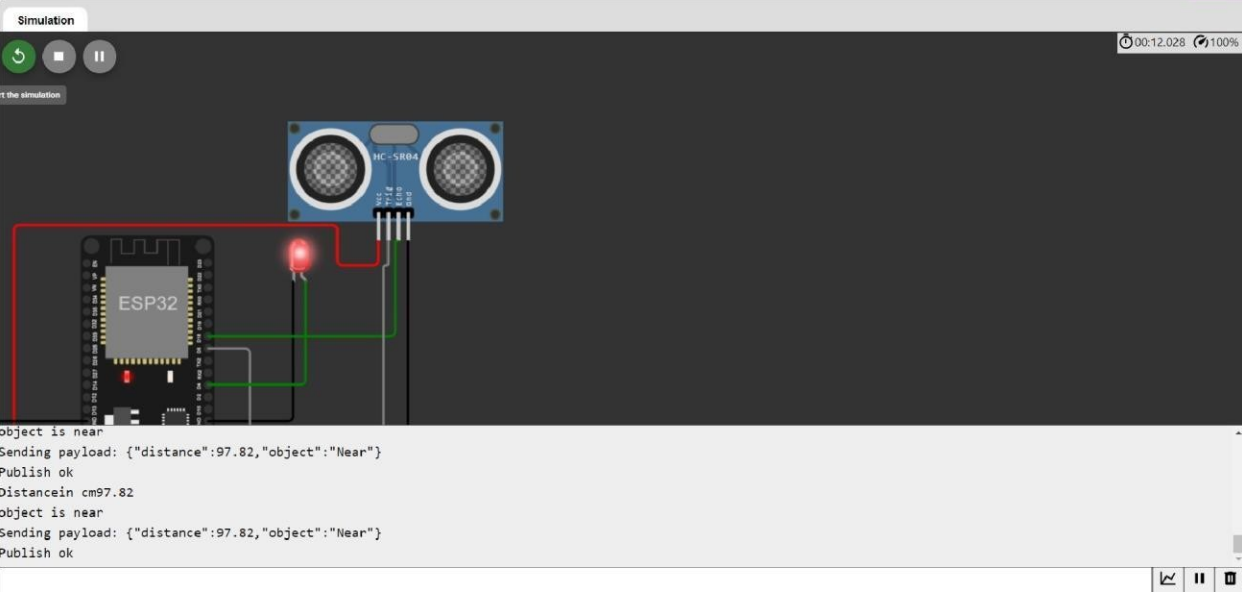

object is near
Sending payload: {"distance":97.82,"object":"Near"}
Publish ok
Distancein cm97.82
object is near
Sending payload: {"distance":97.82,"object":"Near"}
Publish ok

Data sent to the IBM Cloud Device when the object is near

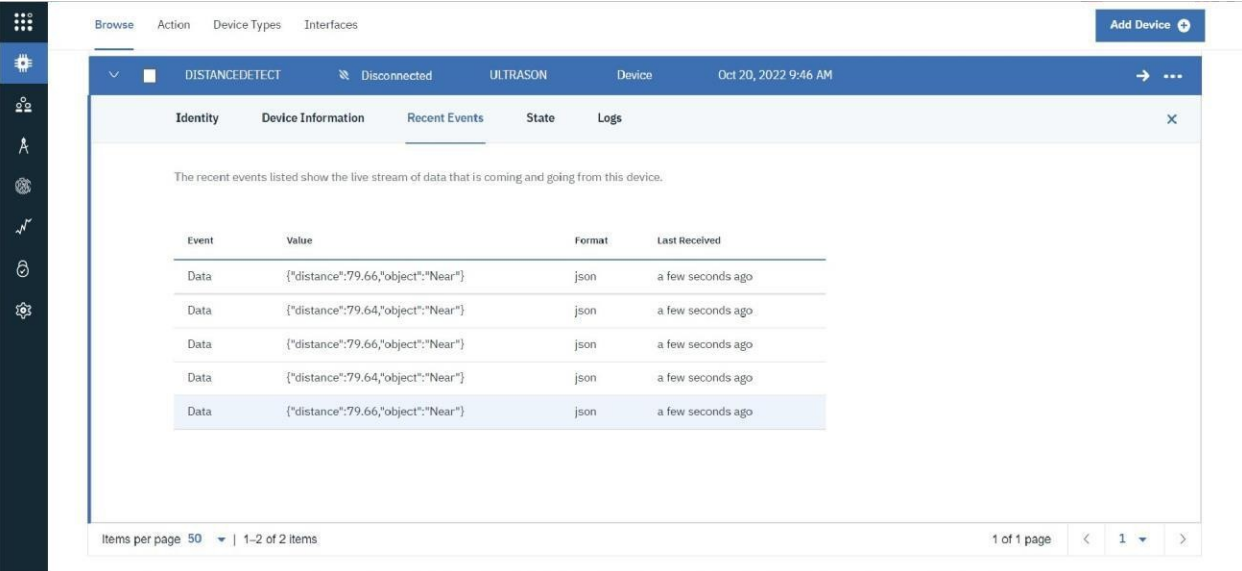

Event	Value	Format	Last Received
Data	{"distance":79.66,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.64,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.66,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.64,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.66,"object":"Near"}	json	a few seconds ago