

ASSIGNMENT 4

Ultrasonic sensor simulation in Wokwi

| | |
|-----------------|------------------|
| Assignment Date | 28 October 2022 |
| Team ID | PNT2022TMID13097 |
| Maximum Marks | 2 marks |

Question :

Write a code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100cms send an “Alert” to IBM cloud and display in the device recent events.

Code:

```
#include <WiFi.h>
#include <PubSubClient.h>
void callback(char* subscribtopic, byte* payload, unsigned int
payloadLength);
#define ORG "kotoq5"//IBM ORGANITION ID
#define DEVICE_TYPE "ESP32"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "12345"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "12345678" //Token
String data3;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribtopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient);
const int trigPin = 5;
const int echoPin = 18;
#define SOUND_SPEED 0.034
long duration;
float distance;
void setup() {
  Serial.begin(115200);
  pinMode(trigPin, OUTPUT);
  pinMode(echoPin, INPUT);
  wificonnect();
  mqttconnect();
}
void loop()
{
  digitalWrite(trigPin, LOW);
  delayMicroseconds(2);
```

```

digitalWrite(trigPin, HIGH);
delayMicroseconds(10);
digitalWrite(trigPin, LOW);
duration = pulseIn(echoPin, HIGH);
distance = duration * SOUND_SPEED/2;
Serial.print("Distance (cm): ");
Serial.println(distance);
if(distance<100)
{
Serial.println("ALERT!!");
delay(1000);PublishData(distance);
delay(1000);
if (!client.loop()) {
mqttconnect();
}
}
delay(1000);
}
void PublishData(float dist) {
mqttconnect();
String payload = "{\"Distance\":";
payload += dist;
payload += ", \"ALERT!!\": \"\" \"Distance less than 100cms\"\"";
payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);
if (client.publish(publishTopic, (char*) payload.c_str())) {
Serial.println("Publish ok");
} else {
Serial.println("Publish failed");
}
}
void mqttconnect() {
if (!client.connected()) {
Serial.print("Reconnecting client to ");
Serial.println(server);
while (!client.connect(clientId, authMethod, token)) {
Serial.print(".");
delay(500);
}initManagedDevice();
Serial.println();
}
}
void wificonnect()
{
Serial.println(); Serial.print("Connecting to ");
WiFi.begin("Wokwi-GUEST", "", 6); while (WiFi.status() !=
WL_CONNECTED) { delay(500);
Serial.print(".");
}
Serial.println(""); Serial.println("WiFi
connected"); Serial.println("IP address: ");


```

```

Serial.println(WiFi.localIP());
}
void initManagedDevice() {
if (client.subscribe(subscribetopic)) {
Serial.println((subscribetopic)); Serial.println("subscribe to
cmd OK");
} else {
Serial.println("subscribe to cmd FAILED");
}
}
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic);
for (int i = 0; i < payloadLength; i++) {Serial.print((char)payload[i]);
data3 += (char)payload[i];
}
Serial.println("data: "+ data3);
data3="";
}
}

```

Output:

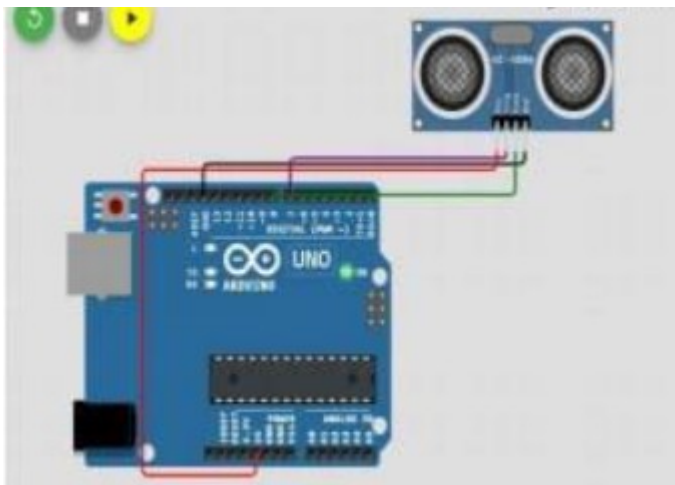


```

Connecting to ....
WiFi connected
IP address:
10.10.0.2
Reconnecting client to ytluse.messaging.internetofthings.ibmcloud.com
iot-2/cmd/test/fmt/String
subscribe to cmd OK

Distance (cm): 399.92
Distance (cm): 399.96
Distance (cm): 399.94
Distance (cm): 399.98
Distance (cm): 399.94
Distance (cm): 399.92
Distance (cm): 399.94

```

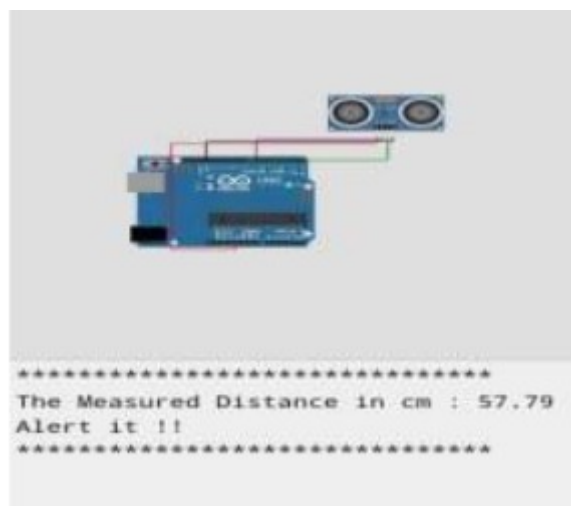

The recent events listed show the live stream of data that is coming and going from this device.

| Event | Value | Format | Last Received |
|---------|--|--------|-------------------|
| event_1 | {"distance":7,"Alert":"Distance less than 10"} | json | a few seconds ago |
| event_1 | {"distance":9,"Alert":"Distance less than 10"} | json | a few seconds ago |
| event_1 | {"distance":8,"Alert":"Distance less than 10"} | json | a few seconds ago |
| event_1 | {"distance":9,"Alert":"Distance less than 10"} | json | a few seconds ago |