

ASSIGNMENT-4

Date	19 November 2022
Team ID	PNT2022TMID06056
Name	LAKSHANTH.K
Student Roll Number	1902048

Problem Statement:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cm send "alert" to IBM cloud and display in device recent events.

CODE :

```
#include <WiFi.h>

#include <PubSubClient.h>
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);
//-----credentials of IBM Accounts-----
#define ORG "kotoq5"//IBM ORGANITION ID
#define DEVICE_TYPE "ESP32"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "12345"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "12345678" //Token
String data3;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient);
const int trigPin = 5;
const int echoPin = 18;
#define SOUND_SPEED 0.034
long duration;
float distance;
void setup() {
```

```

Serial.begin(115200);
pinMode(trigPin, OUTPUT);
pinMode(echoPin, INPUT);
wificonnect();
mqttconnect();
}
void loop()
{
digitalWrite(trigPin, LOW);
delayMicroseconds(2);
digitalWrite(trigPin, HIGH);
delayMicroseconds(10);
digitalWrite(trigPin, LOW);
duration = pulseIn(echoPin, HIGH);
distance = duration * SOUND_SPEED/2;
Serial.print("Distance (cm): ");
Serial.println(distance);
if(distance<100)
{
Serial.println("ALERT!!");
delay(1000);
PublishData(distance);
delay(1000);
if (!client.loop()) {
mqttconnect();
}
}
delay(1000);
}
void PublishData(float dist) {
mqttconnect();
String payload = "{\"Distance\": ";
payload += dist;
payload += ", \"ALERT!!\": \"\" \"Distance less than 100cms\"";
payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);

if (client.publish(publishTopic, (char*) payload.c_str())) {
Serial.println("Publish ok");
} else {
Serial.println("Publish failed");
}
}
void mqttconnect() {
if (!client.connected()) {
Serial.print("Reconnecting client to ");
Serial.println(server);
}
}

```

```

while (!client.connect(clientId, authMethod, token)) {
  Serial.print(".");
  delay(500);
}
initManagedDevice();
Serial.println();
}
}
void wificonnect()
{
  Serial.println();
  Serial.print("Connecting to ");
  WiFi.begin("Wokwi-GUEST", "", 6);
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  }
  Serial.println("");
  Serial.println("WiFi connected");
  Serial.println("IP address: ");
  Serial.println(WiFi.localIP());
}
void initManagedDevice() {
  if (client.subscribe(subscribetopic)) {
    Serial.println((subscribetopic));
    Serial.println("subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
  Serial.print("callback invoked for topic: ");
  Serial.println(subscribetopic);
  for (int i = 0; i < payloadLength; i++) {
    //Serial.print((char)payload[i]);
    data3 += (char)payload[i];
  }
  Serial.println("data: "+ data3);
  data3="";
}

```

OUTPUT:

The screenshot shows the Arduino IDE interface with a simulation window. The code on the left is for an ESP32 connected to an HC-SR04 ultrasonic sensor. It defines an IBM IoT organization and device, sets up MQTT credentials, and sends distance data to the cloud. The simulation window on the right shows a circuit diagram with an ESP32 and an HC-SR04 sensor. The serial monitor output shows the following sequence of events:

```
no object found
Sending payload: {"distance":141.21,"object":"No"}
Publish ok
Distancein cm141.21
no object found
Sending payload: {"distance":141.21,"object":"No"}
Publish ok
```

Data sent to the IBM cloud device when the object is far


The screenshot shows the IBM Watson IoT Platform console. The device 'DISTANCEDETECT' is selected, and the 'Recent Events' tab is active. The table below shows the recent events:

Event	Value	Format	Last Received
Data	{"distance":141.21,"object":"No"}	json	a few seconds ago
Data	{"distance":141.21,"object":"No"}	json	a few seconds ago
Data	{"distance":141.21,"object":"No"}	json	a few seconds ago
Data	{"distance":141.18,"object":"No"}	json	a few seconds ago
Data	{"distance":141.2,"object":"No"}	json	a few seconds ago

when object is near to the ultrasonic sensor

Simulation

00:12.028 100%

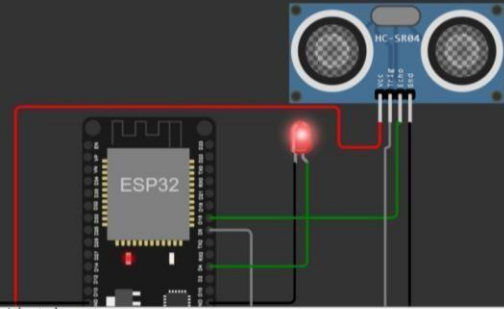

object is near

```
Sending payload: {"distance":97.82,"object":"Near"}
Publish ok
Distancein cm97.82
object is near
Sending payload: {"distance":97.82,"object":"Near"}
Publish ok
```

Data sent to the IBM Cloud Device when the object is near

Browse Action Device Types Interfaces Add Device

DISTANCEDETECT Disconnected ULTRASON Device Oct 20, 2022 9:46 AM

Identity Device Information Recent Events State Logs

The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
Data	{"distance":79.66,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.64,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.66,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.64,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.66,"object":"Near"}	json	a few seconds ago

Items per page 50 | 1-2 of 2 items 1 of 1 page