

ASSIGNMENT 4

Ultrasonic sensor simulation in Wokwi

Date	25 October 2022
Student Name	Sibichakaravarthy
Student Roll Number	710419106027
Maximum Marks	2 Marks

Question-1:

Write a code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100cms send an “Alert” to IBM cloud and display in the device recent events.

Code:

```
#include <WiFi.h>
#include <PubSubClient.h>
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);
//-----credentials of IBM Accounts-----
#define ORG "kotoq5"//IBM ORGANITION ID
#define DEVICE_TYPE "ESP32"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "12345"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "12345678" //Token
String data3;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient);
const int trigPin = 5;
const int echoPin = 18;
#define SOUND_SPEED 0.034
long duration;
float distance;
```

```

void setup() {
  Serial.begin(115200);
  pinMode(trigPin, OUTPUT);
  pinMode(echoPin, INPUT);
  wificonnect();
  mqttconnect();
}
void loop()
{
  digitalWrite(trigPin, LOW);
  delayMicroseconds(2);
  digitalWrite(trigPin, HIGH);
  delayMicroseconds(10);
  digitalWrite(trigPin, LOW);
  duration = pulseIn(echoPin, HIGH);
  distance = duration * SOUND_SPEED/2;
  Serial.print("Distance (cm): ");
  Serial.println(distance);
  if(distance<100)
  {
    Serial.println("ALERT!!");
    delay(1000);
    PublishData(distance);
    delay(1000);
    if (!client.loop()) {
      mqttconnect();
    }
  }
  delay(1000);
}
void PublishData(float dist) {
  mqttconnect();
  String payload = "{\"Distance\": ";
  payload += dist;
  payload += ", \"ALERT!!\": \"\" \"Distance less than 100cms\"";
  payload += "}";
  Serial.print("Sending payload: ");
  Serial.println(payload);

  if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish ok");
  } else {
    Serial.println("Publish failed");
  }
}

```

```

}
void mqttconnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting client to ");
    Serial.println(server);
    while (!!!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
      delay(500);
    }
    initManagedDevice();
    Serial.println();
  }
}

void wificonnect()
{
  Serial.println();
  Serial.print("Connecting to ");
  WiFi.begin("Wokwi-GUEST", "", 6);
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  }
  Serial.println("");
  Serial.println("WiFi connected");
  Serial.println("IP address: ");
  Serial.println(WiFi.localIP());
}

void initManagedDevice() {
  if (client.subscribe(subscribetopic)) {
    Serial.println((subscribetopic));
    Serial.println("subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}

void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
  Serial.print("callback invoked for topic: ");
  Serial.println(subscribetopic);
  for (int i = 0; i < payloadLength; i++) {
    //Serial.print((char)payload[i]);
    data3 += (char)payload[i];
  }
  Serial.println("data: "+ data3);
}


```

```
data3="";  
}
```

Diagram.json:

```
{  
  "version": 1,  
  "author": "Sibichakaravarthy",  
  "editor": "wokwi",  
  "parts": [  
    { "type": "wokwi-esp32-devkit-v1", "id": "esp", "top": -4.67, "left": -114.67, "attrs": {} },  
    { "type": "wokwi-hc-sr04", "id": "ultrasonic1", "top": 15.96, "left": 89.17, "attrs": {} }  
  ],  
  "connections": [  
    [ "esp:TX0", "$serialMonitor:RX", "", [] ],  
    [ "esp:RX0", "$serialMonitor:TX", "", [] ],  
    [  
      "esp:VIN",  
      "ultrasonic1:VCC",  
      "red",  
      [ "h-37.16", "v-178.79", "h200", "v173.33", "h100.67" ]  
    ],  
    [ "esp:GND.1", "ultrasonic1:GND", "black", [ "h39.87", "v44.04", "h170" ] ],  
    [ "esp:D5", "ultrasonic1:TRIG", "green", [ "h54.54", "v85.07", "h130.67" ] ],  
    [ "esp:D18", "ultrasonic1:ECHO", "green", [ "h77.87", "v80.01", "h110" ] ]  
  ]  
}
```

Circuit Diagram:

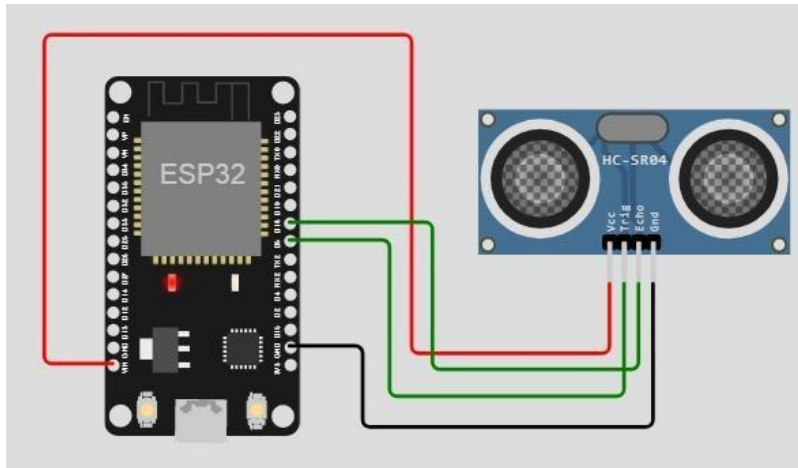


Output:

Wokwi output:

```
Connecting to ....
WiFi connected
IP address:
10.10.0.2
Reconnecting client to ytluse.messaging.internetofthings.ibmcloud.com
iot-2/cmd/test/fmt/String
subscribe to cmd OK

Distance (cm): 399.92
Distance (cm): 399.96
Distance (cm): 399.94
Distance (cm): 399.98
Distance (cm): 399.94
Distance (cm): 399.92
Distance (cm): 399.94
```

IBM cloud output:

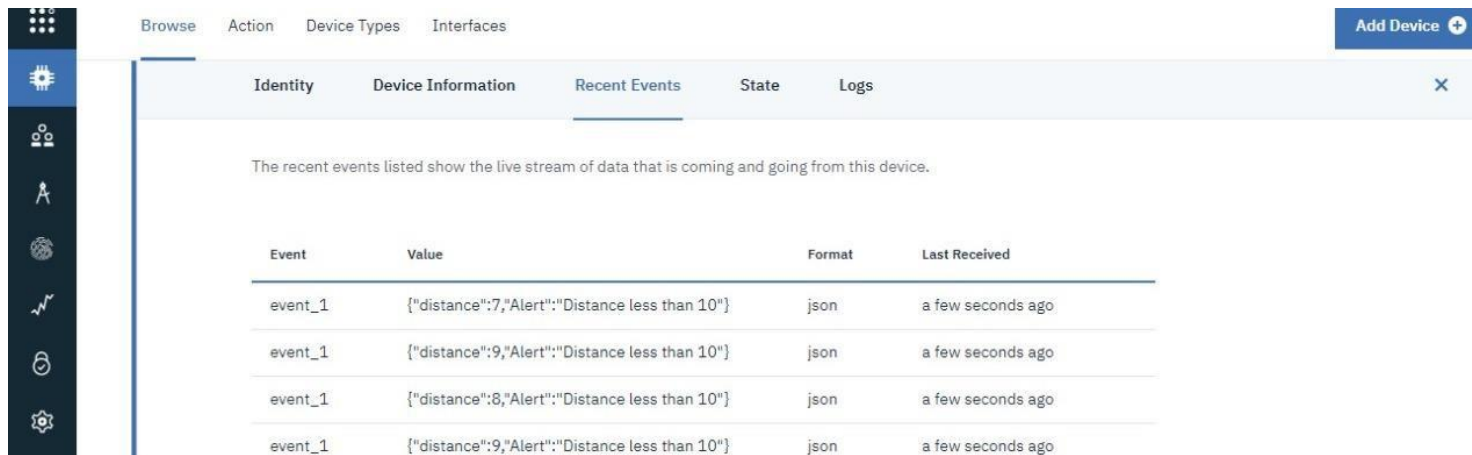

The screenshot shows the IBM Cloud IoT Platform console. On the left is a dark sidebar with icons for various functions. The top navigation bar includes 'Browse', 'Action', 'Device Types', and 'Interfaces'. A blue 'Add Device' button with a plus icon is in the top right. Below the navigation bar, there are tabs for 'Identity', 'Device Information', 'Recent Events' (which is selected), 'State', and 'Logs'. A close button 'X' is on the right of the tabs. Below the tabs, a message states: 'The recent events listed show the live stream of data that is coming and going from this device.' Below this message is a table with four columns: 'Event', 'Value', 'Format', and 'Last Received'. The table contains four rows of data, all with 'event_1' in the 'Event' column and 'a few seconds ago' in the 'Last Received' column. The 'Value' column contains JSON strings: '{"distance":7,"Alert":"Distance less than 10"}', '{"distance":9,"Alert":"Distance less than 10"}', '{"distance":8,"Alert":"Distance less than 10"}', and '{"distance":9,"Alert":"Distance less than 10"}'. The 'Format' column contains the value 'json' for all rows.

Event	Value	Format	Last Received
event_1	{"distance":7,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":8,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago

Wokwi simulation link:

<https://wokwi.com/projects/346950832799875666>