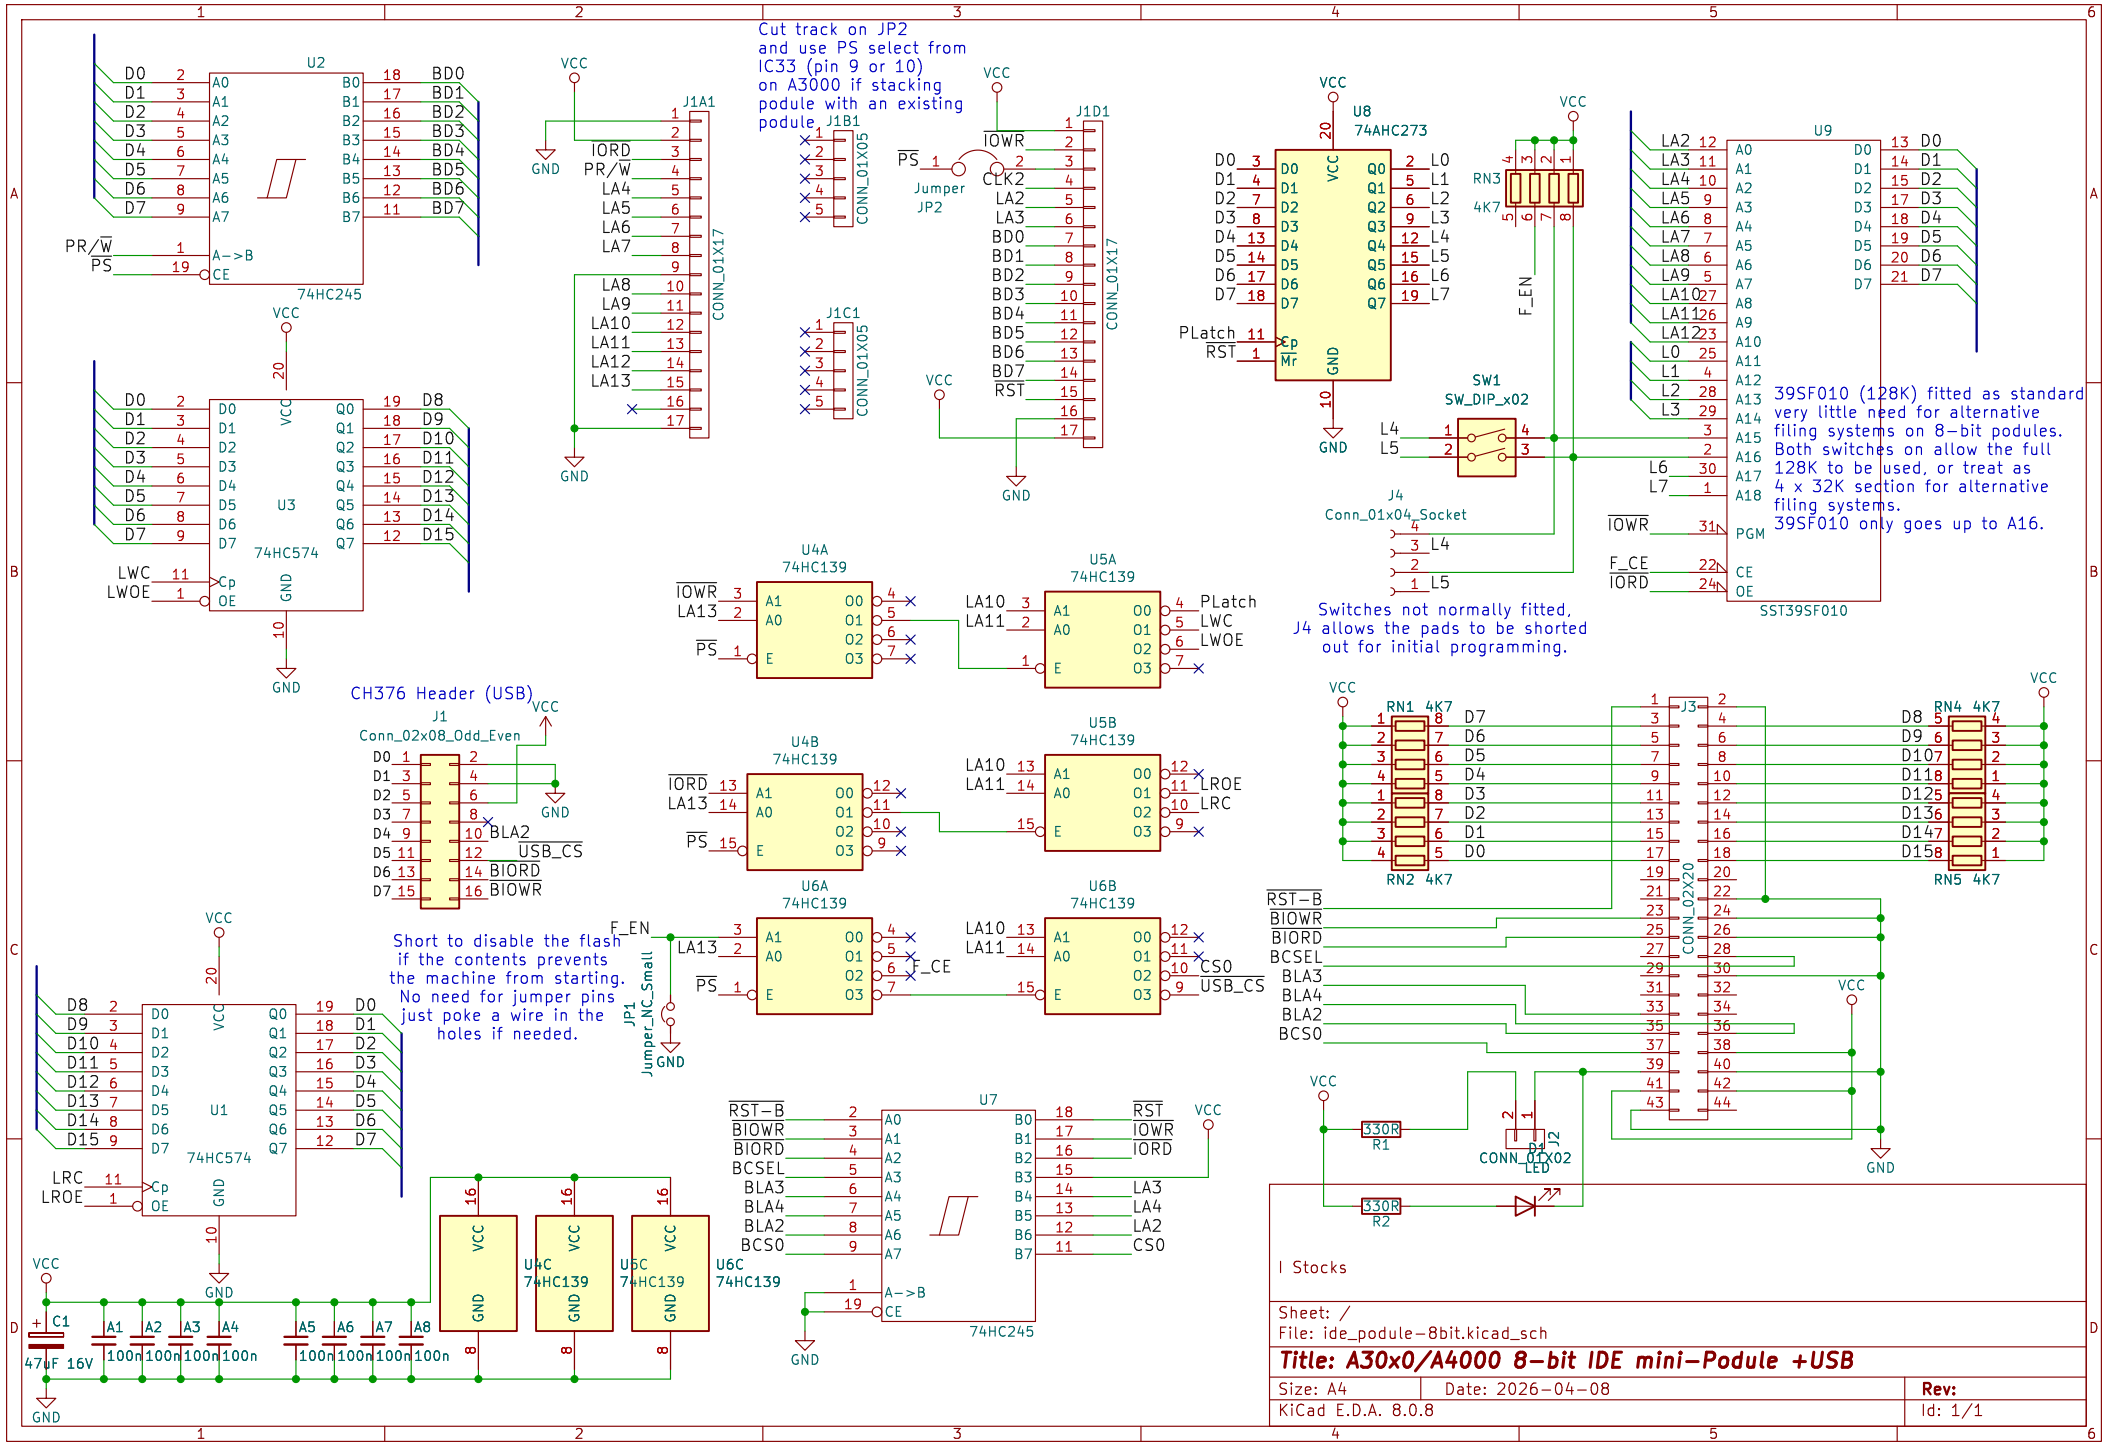

Cut track on JP2
and use PS select from
IC33 (pin 9 or 10)
on A3000 if stacking
podule with an existing
podule J1B1
Jumper
JP2
39SF010 (128K) fitted as standard
very little need for alternative
filing systems on 8-bit podules.
Both switches on allow the full
128K to be used, or treat as
4 x 32K section for alternative
filing systems.
39SF010 only goes up to A16.
Switches not normally fitted,
J4 allows the pads to be shorted
out for initial programming.
CH376 Header (USB)
Short to disable the flash
if the contents prevents
the machine from starting.
No need for jumper pins
just poke a wire in the
holes if needed.
U2
74HC245
U3
74HC574
U8
74AHC273
U9
SST39SF010
U1
74HC574
U4A
74HC139
U4B
74HC139
U4C
74HC139
U5A
74HC139
U5B
74HC139
U5C
74HC139
U6A
74HC139
U6B
74HC139
U6C
74HC139
U7
74HC245
J1A1
J1B1
J1C1
J1D1
J1
J2
J3
J4
JP1
SW1
RN1 4K7
RN2 4K7
RN3
4K7
RN4 4K7
RN5 4K7
F_EN
PLatch
RST
IOWR
IORD
PR/W
PS
LWC
LWOE
LRC
LROE
BLA2
USB_CS
BIORD
BIOWR
F_CE
CS0
RST-B
BCSEL
BLA3
BLA4
BCS0
LA3
LA4
CS0
330R
R1
R2
LED
D1
C1
47uF 16V
100n
Sheet: /
File: ide_podule-8bit.kicad_sch
Title: A30x0/A4000 8-bit IDE mini-Podule +USB
Size: A4
Date: 2026-04-08
Rev:
KiCad E.D.A. 8.0.8
Id: 1/1