





PCIe GPU test rig – power box wiring

Rev A 2026–09–27. Meter terminals read off the PZEM–031 case label (top→bottom 1..4).

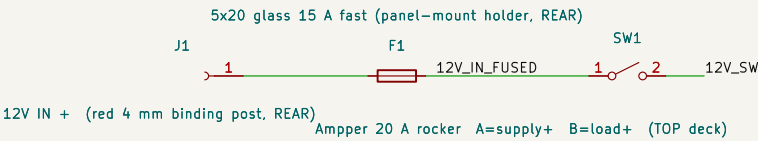


Peacefair PZEM–031 DC 8–100 V / 0–20 A built–in shunt (TOP deck)

SW1 (Ampper 3–pin): A = supply +, B = load +, yellow = LED – to GND_IN. Dot lights when ON.



Amangny pigtail 3x yellow +12 V / 5x black GND -> 2x 8(6+2) male (RIGHT wall exit)



J3 PROBE GND ties to GND_OUT (LOAD –, after the shunt), not GND_IN – otherwise the probe reference shifts by the shunt drop under load.

F1 in the +12 V input line ahead of the switch. 15 A fast–blow; never above 20 A (meter / switch limit).

Internal bus 12 AWG tinned copper. Pigtail = Amangny 18 AWG with the female end cut off: 3 yellow = +12 V, 5 black = GND. Zip tie inside the wall as strain relief.

Whole path rated 20 A -> ~240 W. Diagnostic rig for boot stages and rail checks, not a load tester.

Panels: REAR = J1, J2, F1. TOP deck = SW1, M1 (+ riser dock). RIGHT wall = J4 pigtail exit, J3. FRONT = cord drawer only.

pcie-rig-enclosure/wiring – drawn 2026–09–27, edit in KiCad
lamMrCupp / 3d-printer-models

Sheet: /
File: pcie_rig_power.kicad_sch

Title: PCIe GPU test rig – power box wiring

Size: A4 Date: 2026–09–27

KiCad E.D.A. 10.0.6

Rev: A

Id: 1/1