



HW3

SA25011052 刘睿博

5.13

A.

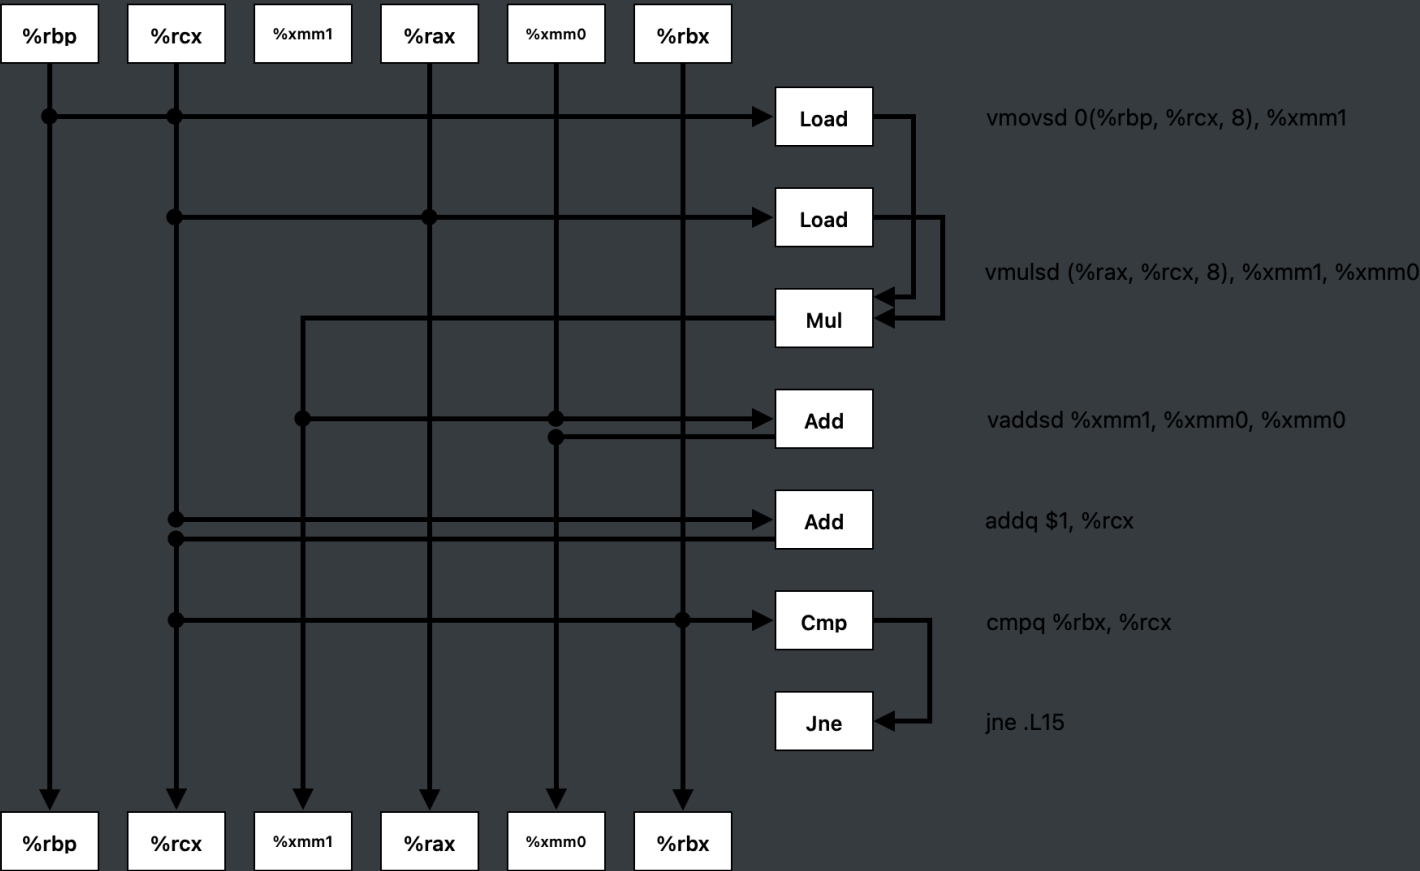

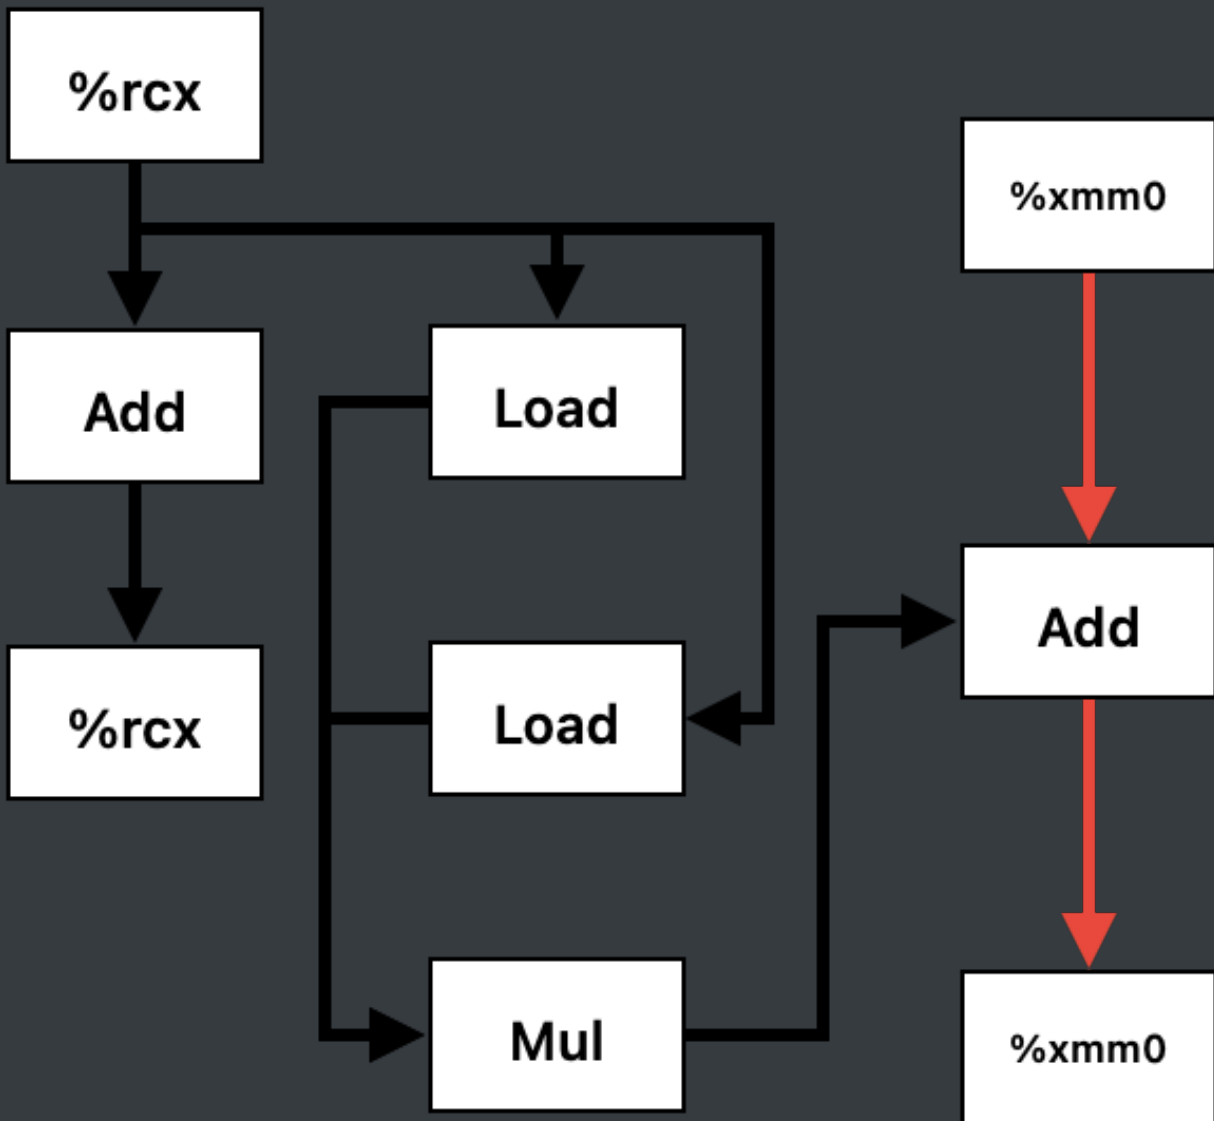

标红部分为关键路径，由于乘法操作较慢，依赖其结果的加法操作是关键路径

B. 3

C. 1

D. 因为关键路径上仅有浮点加法

5.17

```
void *_memset(void *s, unsigned long c, size_t n) {
```

```
size_t K = sizeof(unsigned long);
size_t processed = 0;
unsigned char *ptr = (unsigned char *)s;

while (((size_t)ptr % K) && (processed < n)) {
    *ptr++ = (unsigned char)c;
    processed++;
}

unsigned long *word_ptr = (unsigned long *)ptr;
size_t remaining = n - processed;
size_t word_count = remaining / K;
size_t tail = remaining % K;

for (size_t i = 0; i < word_count; i++) {
    *word_ptr++ = c;
}

ptr = (unsigned char *)word_ptr;
for (size_t i = 0; i < tail; i++) {
    *ptr++ = (unsigned char)c;
}

return s;
}
```