



## Datasheet

### ZW0301 With Developers Kit v5.0x

Document No.:	DSH10717-3
Version:	3
Description:	Datasheet for ZW0301 describing the features supported by SW developers kit version 5.0x.
Written By:	JMI
Date:	2007-03-02
Reviewed By:	DCL;JFR;MVO;NTJ;OPP;SDH;TCA;TJC
Restrictions:	None

#### Approved by:

Date	CET	Initials	Name	Justification
2007-03-02		08:52:43	NTJ	Niels Thybo Johansen

This document is the property of Zensys A/S. The data contained herein, in whole or in part, may not be duplicated, used or disclosed outside the recipient for any purpose other than to conduct technical evaluation. This restriction does not limit the recipient's right to use information contained in the data if it is obtained from another source without restriction.

**CONFIDENTIAL**

## REVISION RECORD

Doc. Rev	Date	By	Pages affected	Brief description of changes
1	2006-07-10	TJC	All	Copied from ZW0301 DSH for Developers kit and modified.
	2006-08-28	JMI	All	ZW0201->ZW0301 DK v4.1x->DK v4.5x.
	2006-09-13	JMI	4	WUT description updated to include fast mode (7.8 ms to 2 s in 7.8 ms steps).
			20	Added precision specification for WUT in fast mode.
			22	Added weight to package specification.
			1	Picture updated to ZW0301.
2	2006-11-16	JMI	2	ZW0201 compatibility added in bullet list.
			2-3	WUT timer range added in bullet list.
			2, 3, 7-12, 23	WUT range added in timer bullet list.
			12	PWM description and figure corrected (programming is high and low period, not high and total period).
				Changed ZW0201 to ZW0301 in figures.
			I	Added that the ZW0301 programming interface is fully compatible with ZW0201.
			i, II, 2, 4, 5, 11	Added QFN definition.
			1	Changed dev kit 4.5x to 5.0x.
			14	"ZW0201 Compatible (SW & HW)" -> "Pin-to-pin compatible with ZW0201"
3	2007-01-31	JMI	19	Modified "General Description" adding focus on monitoring and control applications and battery-to-battery and mains-to-battery communication.
			20	In absolute maximum ratings disclaimer: "... are not guaranteed. ..." -> "... is not guaranteed. ..."
			21	Corrected symbol $P_{RF,9.6k}$ to $P_{RF,40k}$ for 40 kb/s sensitivity.
			1, 19	Corrected "Ns" -> "ns".
			19	Added SCK to waveform in figure 25.
	2007-02-28	JMI	1	Note on why VPP is reserved removed.
			14	Added HK and ANZ frequencies.
			15, 19	9.6 kb/s sensitivity updated (-104 -> -105).
			16	Added sensitivity specifically for HK.
			19	Removed duplicate "applications" in "...designed for very low power and low voltage monitoring and control applications applications ..."
			20	Extended note on maximum ambient temperature.
			22	Removed references to ZetupRF – no longer in use.
				$V_{OH}$ and $V_{OL}$ split into a -35 °C to 55 °C section and a -35 °C to 90 °C section. The -35 °C to 90 °C section. The latter is $\pm 5.5$ mA instead of $\pm 6$ mA.
				Corrected TJ max temperatures (85 -> 95 °C).
				Added operating temperature range for maximum output power settings in notes.
				WUT precision only specified at 10 s. $E_{WUT1}$ renamed to $E_{WUT}$
				Weight changed from 0.07 to 0.06 g.

# Table of Contents

1	Abbreviations.....	I
2	Introduction.....	II
2.1	Purpose.....	II
2.2	Audience and prerequisites.....	II
2.3	Datasheet.....	II
	Summary.....	1
	General Description.....	1
	Features.....	1
	Development Tools.....	2
	Architectural Overview.....	2
	Supply Regulators.....	3
	XTAL and System Clock.....	3
	Power-On-Reset / Brown-out Circuit.....	3
	RF Transceiver.....	3
	8051 MCU including Timer 0 & 1.....	3
	GPT.....	3
	Wake Up Timer.....	4
	SFR.....	4
	32 kbyte Flash Memory.....	4
	256 byte IRAM.....	4
	2 kbyte XRAM.....	4
	Interrupt Controller.....	4
	Triac Controller.....	4
	ADC.....	4
	Serial Peripheral Interface - SPI.....	5
	UART.....	5
	Power Control.....	5
	I/O Interfaces.....	5
	Pin Definitions.....	5
	System Interface.....	7
	Clock Signals.....	8
	Reset.....	8
	RF Transceiver.....	8
	UART.....	9
	External Interrupts.....	9
	Triac Controller.....	10
	ADC.....	11
	Serial Peripheral Interface - SPI.....	11
	Decoupling and Supply Considerations.....	13
	Connecting Unused Inputs.....	13
	Absolute Maximum Ratings.....	14
	Recommended Operating Conditions.....	14
	Electrical Characteristics – Power Consumption.....	15
	Electrical Characteristics - DC.....	16
	Output Characteristic.....	17
	Electrical Characteristics - AC.....	18
	Capacitive Loading.....	18
	Electrical Characteristics - RF.....	19
	Timing Parameters.....	20
	Pin Configuration.....	21
	Package Outline Dimensions.....	22
	Device Marking.....	23
	Process Specification.....	24
	Reflow Profile.....	24
	Table of Contents.....	25

## 1 ABBREVIATIONS

Abbreviation	Explanation
ADC	Analogue to Digital Converter
API	Application Programming Interface
BSIZE	Boot Sector Size
BOBLOCK	Boot Block Lock
CMOS	Complementary Metal Oxide Semiconductor
CS	Chip Select
DMA	Direct Memory Access
ESD	Electrical Static Discharge
ESR	Electrical Serial Resistance
FSK	Frequency Shift Keying
GND	Ground
GPIO	General Purpose I/O's
HW	Hardware
I <sup>2</sup> C	Inter-Integrated Circuit (Philips' 2-wire serial bus)
LO	Local Oscillator
LSB	Least Significant Byte
MCU	Micro Controller Unit
MISO	Master In Slave Out
MOSI	Master Out Slave In
MSB	Most Significant Byte
PA	Power Amplifier
PCB	Printed Circuit Board
POR	Power-On Reset
PWM	Pulse Width Modulator
QFN	Quad Flat No leads package
RF	Radio Frequency
RTC	Real Time Clock
SAW	Surface Acoustic Wave
SFR	Special Functions Register (8051 processor control registers)
SCK	Serial Clock
SMD	Surface Mounted Devices
SPI	Serial Peripheral Interface (3-4 wire serial interface)
SPIRE	SPI Read Flash Enable
SRAM	Static Random Access Memory
SW	Software
TBC	To Be Confirmed
TBD	To Be Defined
T/R	Transmit / Receive
UART	Universal Asynchronous Receive Transmit (Asynchronous serial interface)
VCO	Voltage Control Oscillator
ZEROX	Zero crossing

## 2 INTRODUCTION

### 2.1 Purpose

The objective of this document is to give a detailed HW datasheet of the Zensys **ZW0301** Z-Wave™ Single Chip. The document does not include matters pertaining to SW.

### 2.2 Audience and prerequisites

The target audience of this document is the PCB board designer. No prerequisites are required.

### 2.3 Datasheet

The datasheet is given on the following pages (1-24). Pages up to and including this page and the last page of the document are not part of the datasheet.

The following features and all related information have been left out in order for the datasheet to match the features supported by the API in Developers Kit v5.0x:

- Frame Handler
- 8 MHz MCU clock frequency
- Triac controller non-masking mode
- SPI slave mode in normal operation
- Availability of SPI in applications when not used by the protocol
- Gauss shaping (GFSK)



# ZW0301

## Z-Wave™ Single Chip

### Low Power Z-Wave™ Transceiver with Microcontroller

#### SUMMARY



**Z-Wave™ Single Chip**

- **Pin-to-pin compatible with ZW0201**
- **RF Transceiver**
- **Optimized 8051 Microcontroller**
- **32 kbyte Flash Memory**
- **2 kbyte SRAM**
- **Triac Controller**
- **Integrated I/O Peripherals: SPI, UART and PWM**
- **12 bit Rail to Rail ADC**
- **Sleep Mode with Wake Up Timer 7.8 ms to 256 s sleep time**
- **Watchdog Timer**
- **Power-On Reset / Brown-Out Detector**
- **Battery Monitoring**
- **On-Chip Supply Regulators**
- **Supply Voltage: 2.1-3.6 V**
- **Small Package: 32 pin 5x5x0.9mm QFN**

#### GENERAL DESCRIPTION

The **ZW0301** Z-Wave™ Single Chip is a complete wireless solution for home automation consisting of an integrated RF transceiver, an 8051 microcontroller, a Z-Wave™ SW Application Programming Interface (API) and flash memory storage for user application SW. All of the above is integrated into one single chip. Moreover the **ZW0301** contains a 12 bit

ADC, 10 general purpose I/O pins, a Power-On-Reset circuit / Brown-out detector, a Triac Controller, a Serial Peripheral Interface (SPI), an Interrupt Controller and a UART for connecting to peripheral devices.

The chip is designed for very low power and low voltage monitoring and control applications. It enables communication between battery powered applications and between mains and battery powered applications.

The Z-Wave™ API is described in a separate document: 'Z-Wave™ ZW0301 Application Programming Guide'.

#### FEATURES

##### RF Transceiver

- Freq.: 868.42 MHz (EU), 908.42 MHz (US), 919.82 MHz (HK), 921.42 MHz (ANZ)
- Data rate 9.6 kbit/s and 40 kbit/s
- High sensitivity:
  - 9.6 kbit/s: -105 dBm
  - 40 kbit/s: -101 dBm
- Excellent receiver linearity, IIP3: -6 dBm
- Requires very few external components
- Programmable output power -20 to 0 dBm
- FSK modulation
- HW Manchester coding/decoding (9.6 kbit/s)
- Complies with EN 300 220 and FCC CFR47 part 15

##### 8051 Compatible Microcontroller

- Optimized 8051 MCU core. Six times the performance of the original 8051
- 16 MHz MCU clock frequency

##### Memory

- 32 kbyte flash for Z-Wave™ API library and customer application SW
- Read-back and write protection of flash
- Read/write/erase access to flash from MCU
- 2 kbyte data SRAM (8051 XRAM)
- 256 byte MCU internal SRAM (8051 IRAM)

### Timers

- Timers for Z-Wave™ API + Application SW
  - Two 8051 compatible timers
  - One 16 bit General Purpose Timer (programmable for PWM)
- Wake Up Timer in Sleep mode with a wide range of sleep time (7.8 ms to 256 s)

### Interfaces

- 10 configurable general purpose I/O pins
- Programmable pull-up on all GPIO pins
- High strength outputs  $\pm 6$  mA
- One Schmitt Trigger input (e.g. for zero crossing detection in triac controller app.)
- Two input pins for external interrupts

### Triac Controller

- HW implementation

### Serial Peripheral Interface (SPI)

- Slave in programming mode of internal flash
- Master when interfacing to external EEPROM

### UART

- 9.6 kbaud, 38.4 kbaud or 115.2 kbaud

### External Interrupts

- Two edge or level triggered interrupts
- One interrupt can initiate wake up from sleep mode

### ADC

- 12 or 8 bit resolution
- Four multiplexed inputs
- Maximum sampling rate 23.6 ksamples/s
- Reference: Internal, supply or external input
- On-chip battery monitoring (not supported in Developers Kit v5.0x API)

### Power Management

- Power down / Sleep mode with wake up timer

### Power-On Reset (POR) / Brown-Out Detector

- Extremely low power consumption (also active in sleep mode)

### Power Consumption (typical values)

- Sleep mode: 2.5  $\mu$ A
- Normal mode (MCU, no RF): 5.2 mA
- Receiving: 23 mA
- Transmitting -5 dBm: 24 mA
- Transmitting +0 dBm: 36 mA

### Development Tools

The user application SW can be compiled using the 8051 C-compiler from Keil Software GmbH. Please refer to the Keil homepage for Embedded Development Tools ([www.keil.com](http://www.keil.com)). The ZW0301 can be programmed using an EPSILON 5 II, an FS2003 or a PPM3 programmer from Equinox Technologies Limited ([www.equinox-tech.com](http://www.equinox-tech.com)).

## ARCHITECTURAL OVERVIEW

Figure 1 shows a functional block diagram of the ZW0301.

The central parts of the ZW0301 are the RF transceiver, the 8051 MCU including SRAM, and the flash memory. In addition to the central parts there are a number of peripheral functions supporting the Z-Wave™ system. All functional blocks are briefly described below:

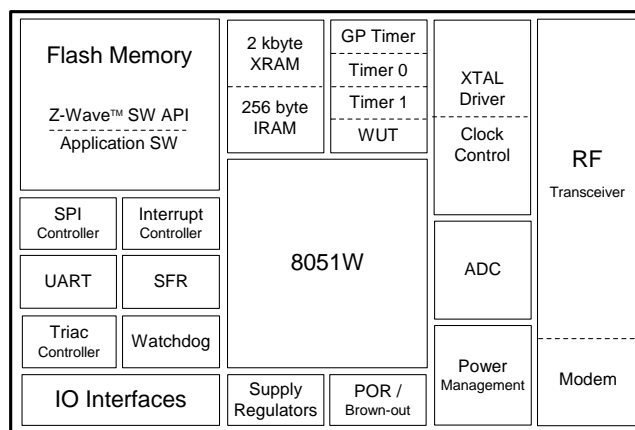


Figure 1: ZW0301 functional block diagram





pin. The PWM is controlled using an 8 bit register to set the high period and an 8 bit register to set the low period.

The PWM timer counts using a fixed clock divider ratio of either 4 or 512. Figure 3 shows the timing of a PWM output.




Figure 3: PWM output

## Wake Up Timer

The Wake Up Timer (WUT) is an ultra low power timer that can be enabled in Sleep mode / power down to wake up the chip after a programmable time period. The sleep period is configurable from 7.8 ms to 256 s in steps of either  $1/128^{\text{th}}$  of a second (7.8 ms to 2 s sleep period) or seconds (1 to 256 s sleep period). The WUT is based on an internal oscillator which is automatically calibrated against the system clock.

## SFR

The SFR contains the 8051 Special Function Registers that are used to control the operating mode of the 8051 and the built-in peripherals. The registers needed in a given application are operated through the API.

## 32 kbyte Flash Memory

The flash Memory is the MCU program memory containing the Z-Wave™ API and the customer application SW. The MCU also has the ability to read, write and erase the flash.

The flash has a built-in read back protection in order to prevent reverse engineering or design theft. Clearing a dedicated lock bit in the flash activates the read back protection. As long as the lock bit is low it is not possible to read from the flash externally (SPI). Other lock bits can protect parts of the flash against writing<sup>1</sup>. The

<sup>1</sup> The boot page (page 0) can be write protected and a boot sector can be defined that is write protected. The boot sector starts from 7FFFF(hex) and downwards. The size of the boot sector is programmable from zero pages up to the entire flash. Neither MCU nor SPI can write to the boot sector.

lock bits can only be unlocked by erasing the entire flash memory.

The flash memory is accessed and programmed through the SPI serial interface.

Through the Developers Kit v5.0x API the **ZW0301** supports up to 70k write cycles for application data.

## 256 byte IRAM

This built-in IRAM is used by the MCU as 8051 internal data memory. The RAM may also be accessed through direct instructions from the MCU.

## 2 kbyte XRAM

The built-in 2 kbyte XRAM are used by the MCU as “8051 external data” memory.

## Interrupt Controller

The **ZW0301** supports 10 interrupt sources including two external interrupt sources on the General Purpose I/O's *P1.6* and *P1.7*. Some of the interrupt sources are reserved by the Z-Wave™ API. The Interrupt Controller controls the interrupt priority assignment. The priority is fixed by the Z-Wave™ protocol.

The external interrupt on *P1.7* can also be enabled to wake up the chip from Sleep mode.

## Triac Controller

The **ZW0301** contains a Triac Controller for power regulating applications. The Triac Controller is compatible with 50-60 Hz. Using an external triac and a few extra external passive components a complete phase control circuit can be designed. The controller is completely implemented in HW in order to keep timing and operation independent of SW and to minimise MCU workload.

## ADC

The ADC resolution can be set to 8 bit or 12 bit. An 8 bit conversion takes less than half the time of a 12 bit conversion.

The ADC is rail to rail and can be programmed to refer to  $V_{DD}$ ,  $V_{SS}$ , a bandgap reference, or to external references (upper and lower). The ADC block includes a battery monitoring mode (no external connections needed). This mode is not supported by the API in Developers Kit v5.0x.

The ADC supports both single and (continuous) multi conversion mode. It has a built-in comparator for generating interrupts when a threshold set by SW is exceeded. The threshold can be either a low threshold or a high threshold. Multi conversion mode is only available for 8 bit mode.

It is possible to shut down the ADC for reducing power consumption.

### Serial Peripheral Interface - SPI

The SPI has two purposes: 1) to provide external access to the flash memory and 2) to allow **ZW0301** to communicate with an external EEPROM.

The **ZW0301** acts as SPI master when interfacing to an external EEPROM. When using the SPI for accessing the flash the SPI acts as a slave.

### UART

The **ZW0301** UART is independent of the 8051 MCU and does not occupy any timer resources. The UART supports full duplex and can operate with the following three baud rates : 9.6 kbaud, 38.4 kbaud, or 115.2 kbaud.

### Power Control

The Power Control Block controls the chip's different power saving modes. The **ZW0301** basically supports two power saving modes below:

- *Normal mode*  
The MCU is running. The RF circuits and the ADC can be powered up or down.
- *Sleep mode / power down mode*  
Lowest power mode. Everything shut down

except the RAM's, brown-out detection and an optional low power timer (WUT).

In addition the ADC can be powered up or down.

In Sleep mode it is possible to wake the MCU up using an external interrupt source on *P1.7*. The source can be active low or active high. The MCU can also be woken by the WUT or a reset on the *RESET\_N* pin (or by power cycling).

### I/O Interfaces

The **ZW0301** has 10 configurable General Purpose I/O (GPIO) pins with optional weak internal pull-up. The GPIO pins are organized as two ports: *P0.x* (2 bits) and *P1.x* (8 bits). The GPIO pins have dual or even triple functionality: User programmable from MCU and some special HW functions (for instance SPI, ADC, UART, TRIAC controller, etc.). Four of the GPIO pins can be either analogue (for ADC) or digital. In digital mode all GPIO pins are CMOS compatible inputs/outputs.

The *RESET\_N* pin has two purposes: 1) External reset and 2) Enable programming mode. When the *RESET\_N* pin is pulled low a master reset is generated. If the *RESET\_N* is held low for an extended period (refer to the External Programming of Flash section) then the chip accepts programming commands on the SPI. The chip will not go into actual programming mode until an SPI 'Programming Enable' command is received.

Finally there are 5 dedicated analogue pins for RF interface and crystal connections.

All GPIO pins will be set as inputs during reset. This pin configuration is maintained after the reset is released (until the SW changes the setting).

### Pin Definitions

The pin definitions for the **ZW0301** can be found in Table 1.

**- CONFIDENTIAL -**

**Table 1: ZW0301 – Pin definitions**

<b>Pin Name(s)</b>	<b># of Pins</b>	<b>Input / Output</b>	<b>Pull-up 1), 2)</b>	<b>Function</b>
<b>General Purpose I/O</b>				
P0.0/ADC/ZEROX	1	I/O I I	Opt. No No	1) User programmable pin w. schmitt trigger input 2) ADC (upper ref. / multiplexed input) 3) ZEROX, Zero crossing detection input for TRIAC Ctrl. w. schmitt trigger input
P0.1/ADC/TRIAC	1	I/O I	Opt. No	1) User programmable pin 2) ADC (lower ref. / multiplexed input)
P1.0/ADC/TXD	1	O I/O	No Opt.	3) Triac output from Triac Ctrl (fire signal). 1) User programmable pin
P1.1/ADC/RXD	1	I/O I I	Opt. No Opt.	2) ADC (multiplexed input) 3) UART TxD - Transmit data 1) User programmable pin
P1.2/MISO	1	I/O	Opt.	2) ADC (multiplexed input) 3) UART RxD - Receive data 1) User programmable pin
P1.3/MOSI	1	I/O	Opt.	2) SPI interface – MISO <sup>3)</sup> (Master In Slave Out)
P1.4/SCK	1	I/O	Opt.	1) User programmable pin 2) SPI interface – MOSI (Master Out Slave In)
P1.5	1	I/O	Opt.	2) SPI interface - SCK (Clock signal) User programmable pin
P1.6/PWM/INT0	1	I/O O I	Opt. Opt. Opt.	1) User programmable pin 2) PWM output of timer 3) External interrupt source 0
P1.7/INT1	1	I/O I	Opt. Opt.	1) User programmable pin 2) External interrupt source 1
<b>General Control</b>				
RESET_N	1	I	Yes	Active low system reset input w. schmitt trigger. Also used for enabling flash programming mode
<b>RF Interface</b>				
RF_IO	1	I/O	NA	RF connection to antenna
RX_IND	1	NA	NA	RX matching
TX_IND	1	NA	NA	TX matching
<b>Clock Inputs</b>				
XOSC_Qx	2	NA	NA	Quartz crystal input (32 MHz / 16 MHz)

Pin Name(s)	# of Pins	Input / Output	Pull-up <sup>1), 2)</sup>	Function
<b>Supply</b>				
VSS	4	NA	NA	Ground
DVDD_IO	1	NA	NA	Positive supply digital IO cells
DVDD	3	NA	NA	Positive supply digital part
AVDD_CO	1	NA	NA	Positive analogue supply for analogue circuits (including ADC)
AVDD_SY	1	NA	NA	Positive analogue supply for synthesizer
AVDD_RF	1	NA	NA	Positive analogue supply for RF
AVDD_IF	1	NA	NA	Positive analogue supply for IF
SUPP	1	NA	NA	Internal voltage - Support circuit
MAIN	1	NA	NA	Internal voltage – Main circuit

<sup>1)</sup> Opt = optional. Can be set by MCU. The optional pull-up's are enabled by default at reset.

<sup>2)</sup> Weak internal pull-up. Pulls up a floating input. Cannot be used for external components.

<sup>3)</sup> The MISO pin will stay as an input until the **ZW0301** receives a 'Programming Enable' command on the MOSI pin.

## SYSTEM INTERFACE

Figure 4 shows a typical **ZW0301** application circuit. The digital GPIO ports are programmable and can be used as interface to the user application. As the **ZW0301** contains a

Power-On-Reset circuit, the *RESET\_N* is only needed during initial programming of the flash memory and can be left unconnected (the *RESET\_N* pin is active low and has internal pull-up) in the typical application. An optional filter may be added on the *RF\_IO* pin in order to improve RF performance.

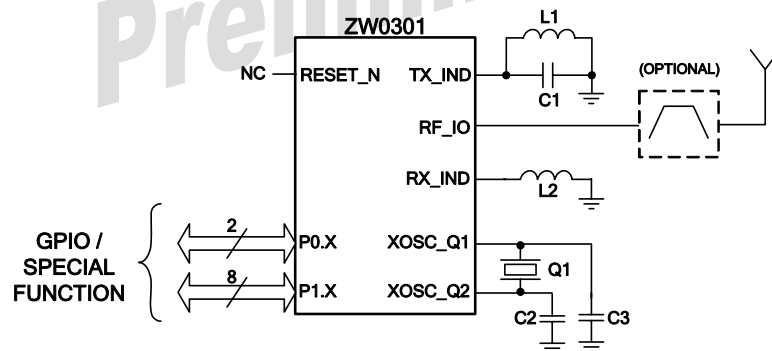


Figure 4: Typical ZW0301 application circuit

## Clock Signals

The **ZW0301** includes an on-chip crystal oscillator making it possible to drive a crystal directly. The **ZW0301** can operate with either a 32 MHz or a 16 MHz crystal. Figure 5 shows the external crystal connections.

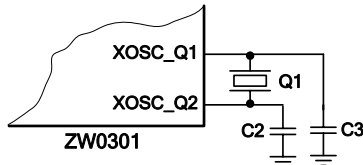


Figure 5: External crystal connections

An external load capacitor is required on each terminal of the crystal. The loading capacitor values depend on the total load capacitance, CL, specified for the crystal. The total load capacitance seen between the crystal terminals should equal CL for the crystal to oscillate at the specified frequency:

$$CL := \frac{1}{\frac{1}{C2} + \frac{1}{C3}} + C_{par}$$

where the parasitic capacitance ( $C_{par}$ ) is constituted by the pin input capacitance and PCB stray capacitance. Typically the total parasitic capacitance is a few pF.

## Reset

Figure 6 shows a simplified block diagram of the internal reset circuit.

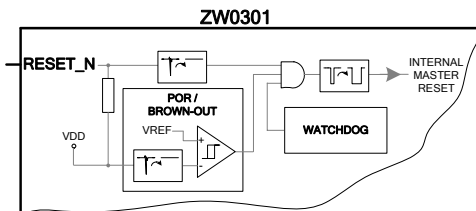


Figure 6: Reset interface

An internal master reset that resets the entire chip (except RAM's) occurs when one or more of the following conditions are true:

- 1) **RESET\_N** is low
- 2) When POR / brown-out detection circuit

- detects low supply voltage
- 3) When the WATCHDOG times out

The **RESET\_N** is an asynchronous input with internal pull-up, schmitt trigger, and glitch protection. The signal is synchronized internally, so that the reset can be asserted and deasserted asynchronously.

The POR circuit also contains a low pass filter for glitch protection and hysteresis for noise and transient stability.

The POR circuit is always active. In Sleep mode the POR goes into a low power mode that protects the circuit against brown-out while keeping the power consumption at an absolute minimum.

During master reset all GPIO pins will be configured as inputs and the RF will set in a power down condition.

## RF Transceiver

### External Components

Figure 7 shows the RF connections in a typical application.

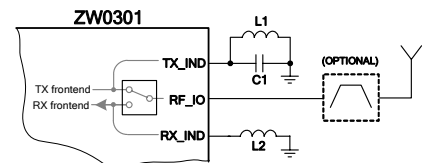


Figure 7: RF interface in typical application

The RF transceiver requires very few external passive components for input/output matching.

An internal T/R switch circuit makes it possible to match the RX and TX independently. L1/C1 is used for matching the transmitter output to 50 Ω. L2 is used for matching the receiver input to 50 Ω.

The values of the matching components will depend on the actual PCB layout but typical values are given in Table 2.

**Table 2: Typical RF component values**

Part	Component Value
C1	5.6 pF $\pm$ 0.25 pF
L1	3.3 nH, 2% (e.g. Coilcraft)
L2	12 nH, 2% (e.g. Coilcraft)

It is recommended to use high Q, low tolerance inductors for best performance. Moreover the matching components should be placed as close as possible to the **ZW0301** with efficient grounding in order to achieve best performance.

Additional external filter components may be added in order to filter the RF harmonics (if necessary) and improve the blocking performance.

#### Antenna Considerations

The **ZW0301** can be used together with various types of antennas. Please refer to the document: 'Antennas for Short Range Devices'.

#### RF PCB Layout Considerations


The PCB wires in the RF layout should be as short as possible to avoid stray inductance. The *RF\_IO* wire should be routed over a GND layer in order to provide a good transmission line and well determined characteristic impedance. Vias should be avoided in routing of signals. Preferably the RF components should be SMD components and the RF section should be kept isolated from surrounding circuitry.

*NOTE: Proper decoupling of the RF is important to the RF performance of the **ZW0301**. Please refer to the Decoupling section for this topic.*

#### UART


The **ZW0301** includes a UART (Universal Asynchronous Receiver Transmitter) interface with a data rate of 9.6 kbaud, 38.4 kbaud, or 115.2 kbaud. The interface operates with 8 bit words, one start bit, one stop bit and no parity.

The interface is available on *P1.0/TxD* and *P1.1/RxD*. Figure 8 shows a typical RS232 UART application circuit.

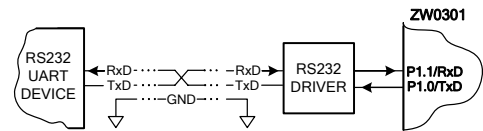

**Figure 8: UART interface in typical application**

The UART shifts data in/out in the following order: start bit, data bits (LSB first) and stop bit. Figure 9 gives the waveform of a serial byte.



**Figure 9: UART waveform**


#### Reception

For noise rejection, the serial port establishes the content of each received bit by a majority voting on the sampled input. This is especially true for the start bit. If the falling edge on RxD is not verified by the majority voting over the start bit then the serial port stops reception and waits for another falling edge on RxD.

After 2/3 of the stop bit time, the serial port waits for another high-to-low transition (start bit) on the RxD pin.

#### External Interrupts

The **ZW0301** supports two external interrupts to the 8051W using pin *P1.6/INT0* and *P1.7/INT1*. The interrupts can be programmed to be either level-triggered (high/low) or edge-triggered (rising/falling).

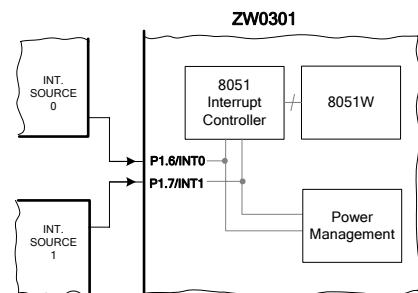

**Figure 10: External interrupts**

The **ZW0301** also supports interrupt(s) to the Power Management block enabling wake up from Sleep mode. The *P1.7/INT1* interrupt pin

can be used to wake up the chip from Sleep mode. The interrupts to the Power Management can be level-triggered (high/low)<sup>II</sup>.

When *P1.7/INT1* wakes up the chip from Sleep mode the clock oscillator must start up before program execution starts. The start up period is denoted  $t_{SON}$  and is listed in the Timing Parameters Table in the end of the datasheet.

## Triac Controller

The **ZW0301** has a Triac Controller using phase control for power regulation of resistive loads and to some degree non-resistive loads. The Triac Controller is available on the following pins *P0.0/ZEROX* and *P0.1/TRIAC*. The *P0.0/ZEROX* input is a Schmitt trigger input to avoid ringing on zero cross detection. Figure 11 shows a simplified application circuit.

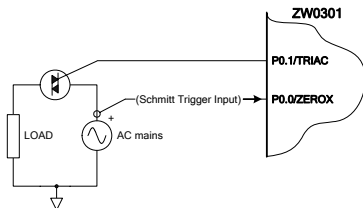


Figure 11: Simplified triac control application

The phase control method conducts power during a specific time period in each half of the AC power cycle. A triac is commonly used to switch on/off the power to the load in the AC power system application. A gate voltage is required to turn on the triac (fire pulse). Once “on”, the triac will stay “on” until the AC sine wave reaches zero current regardless of the gate voltage. The power regulation is performed by controlling the fire angle (turn on start time). The triac will deliver the power to the load after the fire angle and turn off at the zero-crossing point.

The fire pulse must be of a certain duration in order to 1) provide sufficient charge for the triac to turn on and 2) ensure that it does not subsequently switch off due to potential noise. The duration of the fire pulse can be programmed in SW.

<sup>II</sup> Edge-triggering is not supported to Power Management

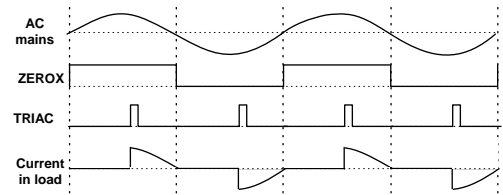


Figure 12: Typical triac waveforms

The zero cross detection can be disturbed by noise on the AC line. In case this noise is strong enough it could worst case cause additional triggering on the *ZEROX* as shown in Figure 13.

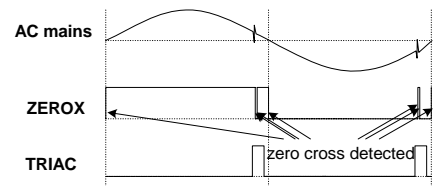


Figure 13: Zero cross signal noise

In order to avoid these extra zero crossing triggers a noise mask has been implemented in the Triac Controller. The mask masks out zero crossings from the true zero cross until a period before the next true zero cross, as shown in Figure 14.


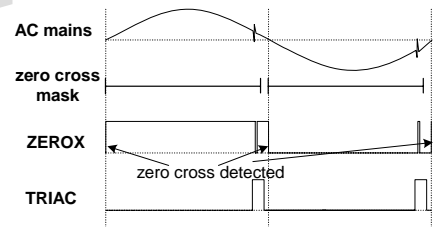


Figure 14: Zero cross signal noise mask


The zero cross detector can either be programmed to use both the rising edge and the falling edge of the zero cross signal (like the *ZEROX* signal in Figure 12) or it can be programmed to only use the rising edge of the zero cross signal (like the *ZEROX* signal in Figure 15).

The Triac Controller can be programmed to generate an interrupt request to the MCU whenever it detects a zero cross.



**Figure 15: ZEROX input in circuits where the Triac Controller use the rising edge of the ZEROX signal to detect zero crosses**


When detecting zero crosses on both rising and falling edges then the detection moments can be offset due to the threshold level of the ZEROX input, as shown in Figure 16.

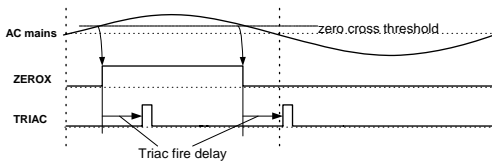

**Figure 16: View of triac waveforms with exaggerated zero cross detection offset**

Because of this offset the triac fire pulse will not be fired at the same distance from the beginning of the positive period and from the beginning of the negative period. It means that the AC load, which the triac controls, will have a DC voltage different from 0 V.

To make this DC voltage negligible, the Triac Controller can be programmed with a variable correction period to correct for the offset, as shown in Figure 17.

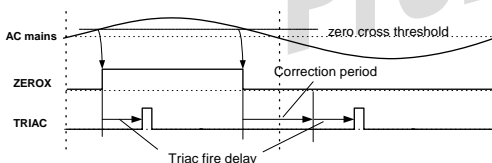

**Figure 17: View of triac waveforms when zero cross detection offset is corrected (exaggerated offset)**


## ADC

The **ZW0301** includes a versatile rail to rail ADC which can operate in high resolution 12 bit mode or a fast 8 bit mode. The ADC can be connected to the external circuit using four of the GPIO pins: *P0.0*, *P0.1*, *P1.0* and *P1.1*. The ADC can sample an analogue signal on any of the four pins. The upper reference for the conversion can be *P0.0*, an internal 1.21 V bandgap reference or the VDD. The lower reference for the conversion can be *P0.1* or GND.

*P0.0* is mainly for external upper reference as the input voltage range of this pin is limited. To avoid extra leakage current this input should be either ground or VDD when the **ZW0301** is in sleep mode.

The ADC is able to perform single conversion or continuous multi conversion (8 bit mode only). The ADC block can be programmed to generate an interrupt to the 8051W when a certain high or low threshold is exceeded.

Figure 18 gives an overview of the **ZW0301** internal ADC block.

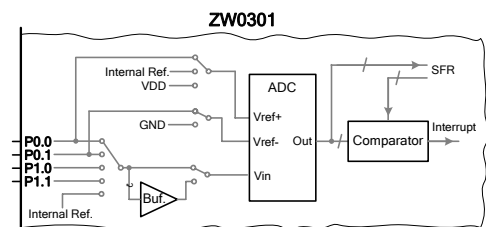

**Figure 18: ADC block**

The ADC can also be used for monitoring the supply level. In this setup the Internal Reference is measured with reference to the VDD. This mode is not supported by the API in Developers Kit v5.0x.

The ADC input signal is loaded by an internal sampling capacitor. In 8 bit mode the sampling time can be configured to fit the source impedance and frequency contents of the input signal. Alternatively an internal buffer can be switched in between the external source and the ADC to reduce capacitive loading of the input. The penalty for inserting the buffer is an increased offset error and degraded rail to rail performance.

## Serial Peripheral Interface - SPI

The Serial Peripheral Interface (SPI) is used for synchronous data transfer between the **ZW0301** and an external EEPROM, used by some node types, or between a programming unit and the **ZW0301**. The SPI is not available to the application.

The **ZW0301** is master when interfacing to an external EEPROM and slave during programming mode. The programming mode is enabled by setting *RESET\_N* low for an



extended period (refer to the External Programming of Flash section)

The interface consists of the three pins: *P1.2/MISO*, *P1.3/MOSI* and *P1.4/SCK*.

The *SCK* is the clock output in master mode and is the clock input in slave mode. During data transmission the *SCK* clocks the data from a 8-bit slave register into a 8-bit master register using the *MISO* connection (Master In Slave Out). At the same time data is clocked in the opposite direction from master to the slave using the *MOSI* (Master Out Slave In) connection. Consequently the two registers can be considered as one distributed 16-bit circular shift register. After 8 clock cycles the two registers will have swapped contents. The principle is illustrated in Figure 19.

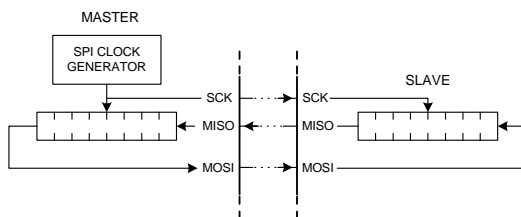


Figure 19: Data exchange between master and slave

Figure 20 shows a typical application where the **ZW0301** interfaces to an EEPROM. The *SS\_N* (slave select) of the slave may be controlled by any available GPIO pin on the **ZW0301**.

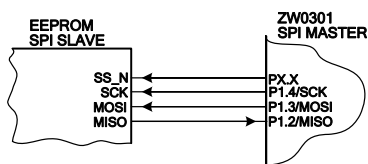


Figure 20: Typical interface to EEPROM

### External Programming of Flash

In flash programming mode an external master must control of the SPI bus and the **ZW0301** will act as slave. In programming mode the flash can be erased, read, and/or written. Moreover it is possible to read a signature byte identifying the chip, enable/disable read/write protection, and/or read/write the HomeID.

Flash programming mode is entered by setting and keeping the *RESET\_N* pin low. When the *RESET\_N* has been held low for  $2^{17}$  XTAL periods then the SPI will accept a 'Programming

Enable' command on the *P1.3/MOSI* pin<sup>III</sup>. The programming commands including the 'Programming Enable' are described in the document: 'Programming the 200-Series Z-Wave Single Chip Flash' (the programming interface of the ZW0301 is fully compatible with the ZW0201). The chip will not enter programming mode until the two first bytes of the 'Programming Enable' has been accepted.

After the chip has entered programming mode the *P1.2/MISO* pin will be set as output. The **ZW0301** will hereafter stay in programming mode as long as the *RESET\_N* pin is held low. When the *RESET\_N* pin is set high the chip will generate an internal master reset pulse and normal program execution will start up. The watchdog function will be disabled as long as the chip is in programming mode and all other GPIO's than the SPI interface will be tri-stated.

Figure 21 gives a simplified block diagram of a typical interface to programming equipment.




Figure 21: Interface to programming equipment

<sup>III</sup> If the **ZW0301** is powered up with the *RESET\_N* pin low the pin must be held low for an additional delay to allow for the clock oscillator start up period. The clock oscillator start up period is denoted *t<sub>SON</sub>* and is listed in the Timing Parameters Table in the back of the datasheet.

## Decoupling and Supply Considerations

The **ZW0301** has on-chip supply regulators generating an internal supply with very high noise rejection. The low-drop-out regulators significantly improve the chip noise tolerance and make its performance more or less independent of external supply level variation. However in order to achieve the best performance of the **ZW0301** (and the supply regulators) a good decoupling strategy is important. Inadequate decoupling may degrade the ADC performance, the RF performance and/or produce significant noise transients on VDD, GND and I/O ports etc.

The rail to rail ADC and the IO ports are supplied directly by the external supply. The direct supply of these functions makes the ADC more susceptible to noise on the external supply. In order to achieve best performance of the ADC the *DVDD\_IO* and the *AVDD\_CO* should be carefully decoupled<sup>IV</sup>.

The decoupling of the supply should be placed as close as possible to the supply pins with minimum stray inductance. One decoupling capacitor is recommended for each of the digital supplies. If the power supply voltage can drop below 2.7 V a decoupling capacitor is also recommended for the capacitor connection point *SUPP*. Two capacitors are recommended for each of the analog supplies. Best performance of the decoupling is achieved if the via is placed on the opposite side of the decoupling capacitor with respect to the **ZW0301** as shown on Figure 22.




Figure 22: Optimal placement of via

When driving high current loads on GPIO pins (e.g. triac output) extra attention is needed on

<sup>IV</sup> The ADC is supplied by the *AVDD\_CO*. The ADC input ports *P0.0*, *P0.1*, *P1.0* and *P1.1* are supplied by the *DVDD\_IO*.

power routing and decoupling<sup>V</sup> in order to minimize noise on the supply.

A typical decoupling value is 33 nF for each digital supply and *SUPP* and 33 nF + 47 pF for each of the analogue supplies. The traces connecting the decoupling capacitors should be as wide as possible with good ground connection.

SMD components with low ESR are preferable for decoupling.

## Connecting Unused Inputs

Unused digital inputs should have their internal pull-up enabled or be tied to VDD or GND to prevent the input from floating. If left floating, the power consumption of the device may increase.


<sup>V</sup> Additional local decoupling may be added to decrease noise transients.

## ZW0301 - SPECIFICATIONS

### ABSOLUTE MAXIMUM RATINGS

T <sub>J</sub>	Junction operating temperature .....	-40 °C to 125 °C
T <sub>A</sub>	Ambient operating temperature <sup>VI</sup> .....	-40 °C to 120 °C
T <sub>STG1</sub>	Storage Temperature (un-programmed devices) .....	-40 °C to 150 °C
T <sub>STG2</sub>	Storage Temperature (programmed devices) .....	-40 °C to 125 °C
T <sub>LEAD</sub>	Lead Temperature (10 sec) .....	260 °C
P <sub>RF,i</sub>	Input RF level. ....	10 dBm
V <sub>DD</sub>	Supply voltage .....	-0.3 V to 4 V
V <sub>I</sub>	Voltage on input pins .....	-0.3 V to V <sub>DD</sub> + 0.3 V

Stresses greater than those listed above may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or other conditions beyond those indicated in the Recommended Operating Conditions section of this specification is not guaranteed. Exposure to maximum ratings conditions for extended periods may affect device reliability. Data retention for a programmed device is better than 7 years at 125 °C.



**Caution!** ESD sensitive device.  
Precaution should be used when  
handling the device in order to  
prevent permanent damage.

### RECOMMENDED OPERATING CONDITIONS

Parameter		Min	Nom	Max	Unit
T <sub>J</sub>	Junction operating temperature	-35		90	°C
T <sub>A</sub>	Ambient operating temperature <sup>VI</sup>	-35		85	°C
V <sub>DD</sub>	Supply voltage	2.1		3.6	V
I <sub>C</sub>	Continuous output current – one GPIO	-20		20	mA
I <sub>CTOT</sub>	Total continuous output source/sink current – all GPIO's	-100		100	mA
T <sub>XTAL</sub>	Total crystal tolerance <sup>1)</sup>	-27		27	ppm
f <sub>XTAL</sub>	Crystal frequency		32 / 16		MHz
C <sub>L,XTAL</sub>	Crystal load capacitance 16 MHz crystal	12	16	30	pF
	32 MHz crystal	10	16	18	pF

#### NOTES

<sup>1)</sup> The tolerance (initial tolerance, ageing, temperature dependency, etc.) will determine the frequency accuracy of the transmitted signal and will influence the receivers frequency lock range.

<sup>VI</sup> Thermal resistance (θ<sub>JA</sub>) of the package is approx. 34 °C/W. At maximum continuous current consumption maximum T<sub>A</sub> must be lower to maintain T<sub>J</sub> below 90 °C.

## ELECTRICAL CHARACTERISTICS – POWER CONSUMPTION

Supply Current / Power Consumption ( $T_J=25\text{ }^{\circ}\text{C}$ ,  $V_{DD}=3.3\text{ V}$ )

Parameter	Condition	Min	Typ	Max	Unit
<b>POWER MODES</b>					
$I_{VDD1}$ Sleep mode (Lowest Power) <sup>1)</sup>			2.5		$\mu\text{A}$
$I_{VDD2}$ Normal mode (MCU on, RF off) <sup>2)</sup>			5.2		$\text{mA}$
$I_{VDD3}$ Receiving <sup>3)</sup>			23		$\text{mA}$
$I_{VDD4}$ Transmitting +0 dBm <sup>4)</sup>			36		$\text{mA}$
$I_{VDD5}$ Transmitting -5 dBm <sup>5)</sup>			24		$\text{mA}$
<b>MODULES IN ON/OFF <sup>6)</sup></b>					
$I_{ADC}$ ADC supply current <sup>7)</sup>			150		$\mu\text{A}$

### NOTES

<sup>1)</sup> Lowest possible power configuration. The ADC, RF transceiver, MCU and flash are shut down. The chip can be woken by brown-out, an external reset pulse, external interrupt (if enabled) or periodical wakeup by WUT (if enabled).

<sup>2)</sup> Normal mode. The MCU is running a simple 'while 1;'-loop. The crystal is 32 MHz. The ADC and the RF transceiver are off.

<sup>3)</sup> Receive Mode. The RF transceiver is in receive mode with the MCU running. The ADC is off. The crystal is 32 MHz.

<sup>4)</sup> Transmission Mode with +0 dBm output power (power setting 0x2A) measured on a Z-Wave<sup>TM</sup> Module PCB (refer to footnote <sup>vii)</sup>). The RF transceiver is in transmit mode with the MCU running. The ADC is off. The crystal is 32 MHz.

<sup>5)</sup> Transmission Mode with -5 dBm output power (power setting 0x1B) measured on a Z-Wave<sup>TM</sup> Module PCB (refer to footnote <sup>vii)</sup>). The RF transceiver is in transmit mode with the MCU running. The ADC is off. The crystal is 32 MHz.

<sup>6)</sup> Current consumption of sub-circuits that can be shut down or set in power saving mode.

<sup>7)</sup> With the ADC in continuous mode and not using bandgap reference and input buffer.

Preliminary

<sup>vii</sup> The Z-Wave Module is a PCB developed by Zensys that implements the typical application as stated on Figure 4.

- CONFIDENTIAL -

## ELECTRICAL CHARACTERISTICS - DC

DC Characteristics ( $T_J=25\text{ }^{\circ}\text{C}$ ,  $V_{DD}=2.1\text{ V}$  to  $3.6\text{ V}$ , unless otherwise specified)

Parameter	Condition	Min	Typ	Max	Unit
<b>POWER-ON-RESET (POR)</b>					
$V_{th,PO}$ Threshold, power up	$T_J = -35\text{ }^{\circ}\text{C}$ to $90\text{ }^{\circ}\text{C}$	1.84		2.10	V
$V_{th,R}$ Threshold, reset (brown out)	$T_J = -35\text{ }^{\circ}\text{C}$ to $90\text{ }^{\circ}\text{C}$	1.80		2.06	V
$V_h$ Hysteresis	$T_J = -35\text{ }^{\circ}\text{C}$ to $90\text{ }^{\circ}\text{C}$	27		37	mV
<b>CLOCK OSCILLATOR</b>					
$C_{XI}$ Parasitic input capacitance			2.4		pF
<b>DIGITAL INPUTS</b>					
$I_{IH}$ High-level input current	$V_{IH}=V_{DD}$			20	nA
$I_{IL}$ Low-level input current	$V_{IL}=0\text{V}$ , no pull-up <sup>1)</sup>	-20			nA
$I_{ILpMn}$ Low-level input current	$V_{IL}=0\text{V}$ , $V_{DD}=2.1\text{V}$ , pull-up <sup>1)</sup>	-27	-18	-11	$\mu\text{A}$
$I_{ILpTp}$ Low-level input current	$V_{IL}=0\text{V}$ , $V_{DD}=3.3\text{V}$ , pull-up <sup>1)</sup>	-67	-48	-33	$\mu\text{A}$
$I_{ILpMx}$ Low-level input current	$V_{IL}=0\text{V}$ , $V_{DD}=3.6\text{V}$ , pull-up <sup>1)</sup>	-78	-57	-40	$\mu\text{A}$
<b>RESET_N, Px.y except P0.0</b>					
$V_{IH}$ High-level input voltage	$T_J = -35\text{ }^{\circ}\text{C}$ to $90\text{ }^{\circ}\text{C}$	$0.7 \cdot V_{DD}$			V
$V_{IL}$ Low-level input voltage	$T_J = -35\text{ }^{\circ}\text{C}$ to $90\text{ }^{\circ}\text{C}$			$0.3 \cdot V_{DD}$	V
<b>P0.0/ZEROX <sup>2)</sup></b>					
$V_{T+}$ Positive-going threshold	$V_{DD} = 3.3\text{ V}$		1.47		V
$V_{T-}$ Negative-going threshold	$V_{DD} = 3.3\text{ V}$		1.00		V
$V_H$ Hysteresis voltage ( $V_{T+}-V_{T-}$ )	$V_{DD} = 3.3\text{ V}$		0.47		V
<b>DIGITAL OUTPUTS</b>					
$V_{OH}$ High-level output voltage	$I_{OH}=6\text{ mA}$ , $T_J = -35\text{ }^{\circ}\text{C}$ to $55\text{ }^{\circ}\text{C}$	$V_{DD} - 0.6$			V
$V_{OH}$ High-level output voltage	$I_{OH}=5.5\text{ mA}$ , $T_J = -35\text{ }^{\circ}\text{C}$ to $90\text{ }^{\circ}\text{C}$	$V_{DD} - 0.6$			V
$V_{OL}$ Low-level output voltage	$I_{OL}=6\text{ mA}$ , $T_J = -35\text{ }^{\circ}\text{C}$ to $55\text{ }^{\circ}\text{C}$			0.4	V
$V_{OL}$ Low-level output voltage	$I_{OL}=5.5\text{ mA}$ , $T_J = -35\text{ }^{\circ}\text{C}$ to $90\text{ }^{\circ}\text{C}$			0.4	V
<b>DIGITAL INPUTS</b>					
$C_{DI}$ Input capacitance				5	pF
<b>ADC</b>					
$I_{il}$ Input leakage current	$V_{DD} = 3.3\text{ V}$			20	nA
$V_I$ Input voltage range <sup>3)</sup>		GND		$V_{DD}$	V
$C_I$ Input capacitance	Internal buffer disabled		30		pF
$C_{IB}$ Input capacitance w. buffer	Internal buffer enabled		2		pF
$V_{Ru}$ External upper reference		$V_{DD} - 0.9$		$V_{DD}$	V
$V_{Rl}$ External lower reference		0		1.4	V
$R_{Ref}$ Internal ref. resistance	Between ref. terminals	90	100	110	k $\Omega$
$C$ Crosstalk between channels	$V_{DD} = 3.3\text{ V}$			1	LSB
$V_{Ref}$ Internal Reference voltage	$T_J = -35\text{ }^{\circ}\text{C}$ to $90\text{ }^{\circ}\text{C}$	1.13	1.21	1.29	V
<b>12 bit resolution</b>					
INL Integral nonlinearity	Reference = $V_{DD} = 3.3\text{ V}$	-5	$\pm 3$	5	LSB
DNL Differential nonlinearity <sup>4)</sup>	Reference = $V_{DD} = 3.3\text{ V}$	-1	$\pm 0.5$	1	LSB
$O_{Er}$ Offset error	Reference = $V_{DD} = 3.3\text{ V}$	-5	$\pm 2$	5	LSB
$E_g$ Gain error	Reference = $V_{DD} = 3.3\text{ V}$	-5	$\pm 1$	5	LSB
<b>8 bit resolution</b>					
INL Integral nonlinearity	Reference = $V_{DD} = 3.3\text{ V}$	-2	$\pm 1$	2	LSB
DNL Differential nonlinearity <sup>4)</sup>	Reference = $V_{DD} = 3.3\text{ V}$	-1	$\pm 0.5$	1	LSB
$O_{Er}$ Offset error	Reference = $V_{DD} = 3.3\text{ V}$	-2	$\pm 0.5$	2	LSB
$E_g$ Gain error	Reference = $V_{DD} = 3.3\text{ V}$	-2	$\pm 0.5$	2	LSB

- CONFIDENTIAL -

NOTES

<sup>1)</sup> Internal pull-up for *RESET\_N* is always enabled

<sup>2)</sup> Schmitt trigger input

<sup>3)</sup> Valid for P0.1, P1.0 and P1.1. For P0.0 use  $V_{Ru}$ . If the internal buffer is enabled the rail to rail performance will be degraded by up to 100 mV for both ends.

<sup>4)</sup> No missing codes.

## Output Characteristic

The **ZW0301** GPIO's are slew rate limited and have a typical drive capability as indicated on Figure 23.

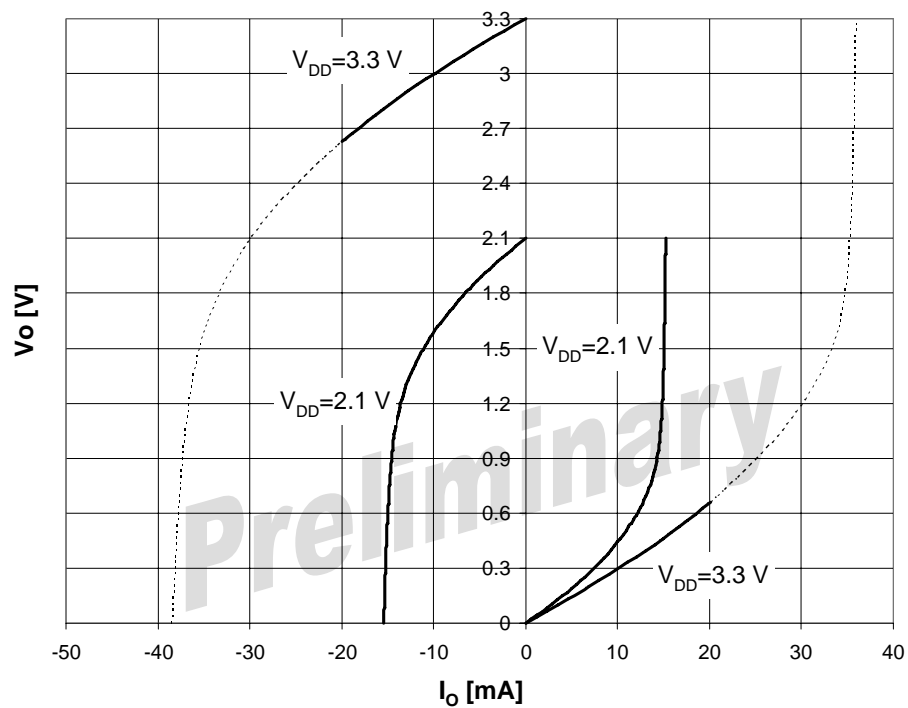


Figure 23: Typical output characteristic ( $T_J=25\text{ }^{\circ}\text{C}$ )

## ELECTRICAL CHARACTERISTICS - AC

AC Characteristics ( $C_L=50$  pF,  $T_J=25$  °C,  $V_{DD}=2.1$  V to 3.6 V)

Parameter	Condition	Min	Typ	Max	Unit
POWER-ON-RESET (POR) G Glitch immunity <sup>1)</sup>		250	1000	2000	nVs
RISE/FALL TIME $P_{x,y}$					
$t_r$ Rise time	10% to 90%		5	9	ns
$t_f$ Fall time	90% to 10%		5	9	ns

### NOTES

<sup>1)</sup> Glitch immunity: Maximum transient duration multiplied by threshold overdrive without causing a reset pulse (i.e.: 1000 nVs glitch immunity  $\Rightarrow$  a 10  $\mu$ s transient of 100 mV below threshold will not cause a reset pulse)

## Capacitive Loading

Figure 24 shows the typical capacitive loading characteristic for the **ZW0301**

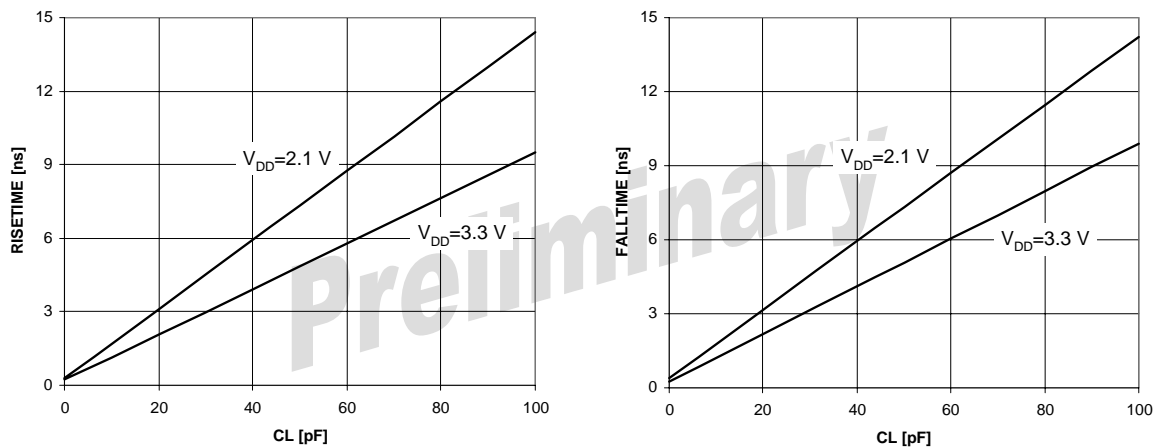


Figure 24: Typical rise / fall time vs. capacitive loading ( $T_J=25$  °C,  $V_{DD}=3.3$  V)

- CONFIDENTIAL -

## ELECTRICAL CHARACTERISTICS - RF

RF Characteristics (T<sub>J</sub> = -35 °C to 85 °C, V<sub>DD</sub> = 2.1 V to 3.6 V, TX matched on TX\_IND, RX matched on RX\_IND, 50 Ω load on RF\_IO)

Parameter	Condition	Min	Typ	Max	Unit
<b>GENERAL</b>					
F <sub>EU</sub>	RF frequency EU		868.42		MHz
	40 kbit/s		868.40		MHz
F <sub>US</sub>	RF frequency US		908.42		MHz
	40 kbit/s		908.40		MHz
F <sub>HK</sub>	RF frequency HK		919.82		MHz
	40 kbit/s		919.80		MHz
F <sub>ANZ</sub>	RF frequency ANZ		921.42		MHz
	40 kbit/s		921.40		MHz
<b>TRANSMIT</b>					
P <sub>RF,oMx</sub>	Max output power <sup>1)</sup>		0		dBm
P <sub>RF,oMx</sub>	Max output power <sup>2)</sup>		-2		dBm
P <sub>RF,oMx</sub>	Max output power <sup>3)</sup>		-5		dBm
P <sub>RF,oMx</sub>	Max output power <sup>4)</sup>		-7		dBm
P <sub>RF,oMn</sub>	Min output power <sup>5)</sup>		-20		dBm
P <sub>S</sub>	Output power step size		2		dBm
Z <sub>RF,o</sub>	RF output impedance		50		Ω
P <sub>h2</sub>	2 <sup>nd</sup> harmonics content <sup>1, 6)</sup>		-47	-44	dBm
P <sub>h3</sub>	3 <sup>rd</sup> harmonics content <sup>1, 6)</sup>		-30	-27	dBm
<b>RECEIVE</b>					
P <sub>RF,Mx</sub>	Maximum input power			10	dBm
P <sub>RF,9.6k</sub>	Sensitivity at 9.6 kbit/s <sup>7)</sup>		-105		dBm
P <sub>RF,40k</sub>	Sensitivity at 40 kbit/s <sup>7)</sup>		-101		dBm
P <sub>RF,9.6k</sub>	Sensitivity at 9.6 kbit/s, F <sub>HK</sub> <sup>7)</sup>		-103		dBm
P <sub>RF,40k</sub>	Sensitivity at 40 kbit/s, F <sub>HK</sub> <sup>7)</sup>		-99		dBm
P <sub>RF,L</sub>	LO leakage			-88	dBm
Z <sub>RF,i</sub>	RF input impedance		50		Ω
IIP3	IIP3 <sup>8)</sup>	-8,5	-6	-4,5	dBm
P <sub>CJ</sub>	Co-channel rejection		6		dB
P <sub>B1</sub>	Blocking, 1 MHz	3 dB above sensitivity limit	-55		dBm
P <sub>B2</sub>	Blocking, 2 MHz	3 dB above sensitivity limit	-36		dBm
P <sub>B3</sub>	Blocking, 5 MHz	3 dB above sensitivity limit	-28		dBm
P <sub>B4</sub>	Blocking, 10 MHz	3 dB above sensitivity limit	-26		dBm
P <sub>B5</sub>	Blocking, 100 MHz	3 dB above sensitivity limit	-24		dBm
<b>FREQUENCY SYNTHESISER</b>					
N <sub>p</sub>	Output signal phase noise	150 kHz offset from carrier	-102		dBc /Hz

### NOTES

<sup>1)</sup> Power setting 0x2A. For applications with an junction operating temperature range of -10 °C to 90 °C

<sup>2)</sup> Power setting 0x29. For applications with an junction operating temperature range of -35 °C to 90 °C

<sup>3)</sup> Power setting 0x1B. For applications with an junction operating temperature range of -10 °C to 90 °C

<sup>4)</sup> Power setting 0x1A. For applications with an junction operating temperature range of -35 °C to 90 °C

<sup>5)</sup> Power setting 0x14.

<sup>6)</sup> Depends on the external matching components.

<sup>7)</sup> Measured with Z-Wave™ frames. FER (frame error rate) better than 10<sup>-2</sup>. The sensitivity is measured at the IF center frequency (180 kHz for Manchester and 200 kHz for NRZ).

<sup>8)</sup> Measured with f<sub>spurious1</sub> = f<sub>RF</sub> + 20 MHz and f<sub>spurious2</sub> = f<sub>RF</sub> + 40 MHz.




## TIMING PARAMETERS

(T<sub>J</sub>=25 °C, V<sub>DD</sub>=3.3 V)

Parameter	Condition	Min	Typ	Max	Unit
POWER-ON-RESET (POR) t <sub>P</sub> Minimum reset pulse		29		175	μs
SYSTEM RESET t <sub>reset</sub> Min. reset pulse on <i>RESET_N</i> <sup>1)</sup>		50			ns
CLOCK OSCILLATOR t <sub>SON</sub> Turn-on time	32 MHz 16 MHz			5 3	ms ms
ADC f <sub>s</sub> Conversion time	8 bit 12 bit	- -	42 92	- -	μs μs
WUT E <sub>WUT</sub> Wake up time precision	10 seconds interval	-0.5	0.25	1.0	%
UART E <sub>UART</sub> UART RX baud rate tolerance		-2		2	%
SPI f <sub>SCK</sub> SCK frequency D SCK duty cycle t <sub>Rise</sub> SCK rise time t <sub>Fall</sub> SCK fall time t <sub>Setup</sub> Data setup Time t <sub>Hold</sub> Data hold Time t <sub>Data</sub> Delay from SCK falling edge to valid data t <sub>ResetP</sub> Min. time of asserting <i>RESET_N</i> before entering prog. mode	10% to 90% 90% to 10%	0.5 40  62.5 62.5  2 <sup>17</sup> ·T <sub>XTAL</sub> <sup>1)</sup>	   T <sub>XTAL</sub> <sup>1)</sup> T <sub>XTAL</sub> <sup>1)</sup>  62.5	4.0 60  62.5	MHz %  ns ns ns

### NOTES

<sup>1)</sup> The T<sub>XTAL</sub> is the period of clock oscillator frequency (= 1/ f<sub>XTAL</sub>).

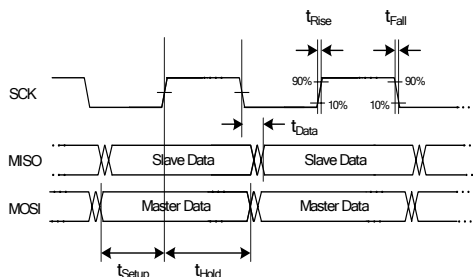


**Figure 25: SPI timing**

- CONFIDENTIAL -

## PIN CONFIGURATION

(32 PINS QFN, TOPVIEW)

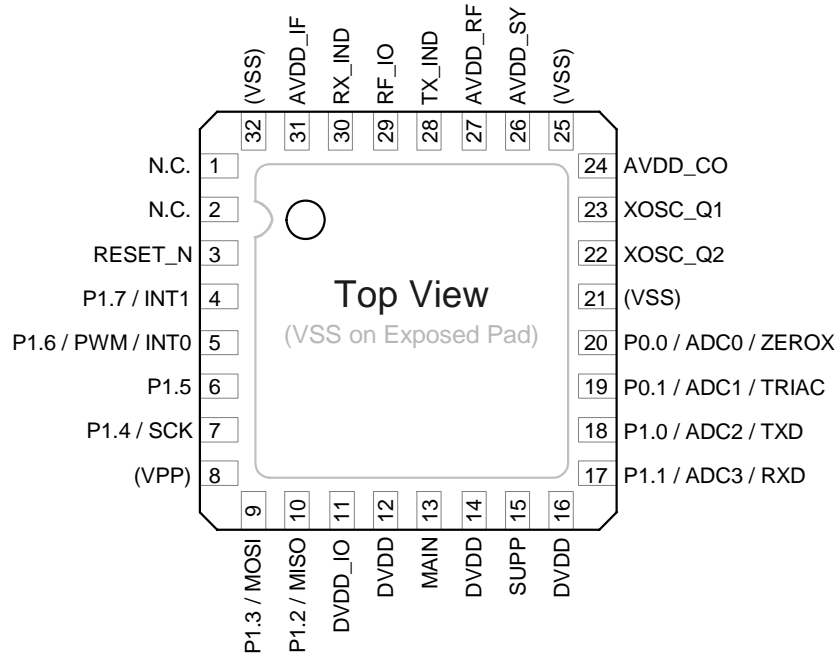

Pin	Pin Name	Pin Type
E.P. <sup>1)</sup>	VSS	Power
1	N.C. <sup>2)</sup>	-
2	N.C. <sup>2)</sup>	-
3	RESET_N	Digital input <sup>3)</sup>
4	P1.7/INT1	Digital tristate I/O
5	P1.6/PWM/INT0	Digital tristate I/O
6	P1.5	Digital tristate I/O
7	P1.4/SCK	Digital tristate I/O
8	(VPP)	Reserved (connected to VSS internally)
9	P1.3/MOSI	Digital tristate I/O
10	P1.2/MISO	Digital tristate I/O
11	DVDD_IO	Power
12	DVDD	Power
13	MAIN	Power
14	DVDD	Power
15	SUPP	Power
16	DVDD	Power
17	P1.1/ADC3/RXD	Digital tristate I/O / analogue input

Pin	Pin Name	Pin Type
18	P1.0/ADC2/TXD	Digital tristate I/O / analogue input
19	P0.1/ADC1/TRIAC	Digital tristate I/O / analogue input
20	P0.0/ADC0/ZEROX	Digital tristate I/O <sup>3)</sup> / analogue input
21	(VSS)	(Power)
22	XOSC_Q2	Analogue output
23	XOSC_Q1	Analogue input
24	AVDD_CO	Power
25	(VSS)	(Power)
26	AVDD_SY	Power
27	AVDD_RF	Power
28	TX_IND	RF
29	RF_IO	RF
30	RX_IND	RF
31	AVDD_IF	Power
32	(VSS)	Power, optional <sup>4)</sup>

### NOTES

<sup>1)</sup> Exposed pad at bottom of chip.

<sup>2)</sup> No connect. Leave pin unconnected.


<sup>3)</sup> Schmitt trigger input.

<sup>4)</sup> VSS pins 21, 25 and 32 are internally connected to the exposed pad. Connection of these pins to ground is optional.

- CONFIDENTIAL -


## PACKAGE OUTLINE DIMENSIONS

(32 PINS PUNCHED QFN 5x5 mm, TOPVIEW, REF: JEDEC-MO-220-F)

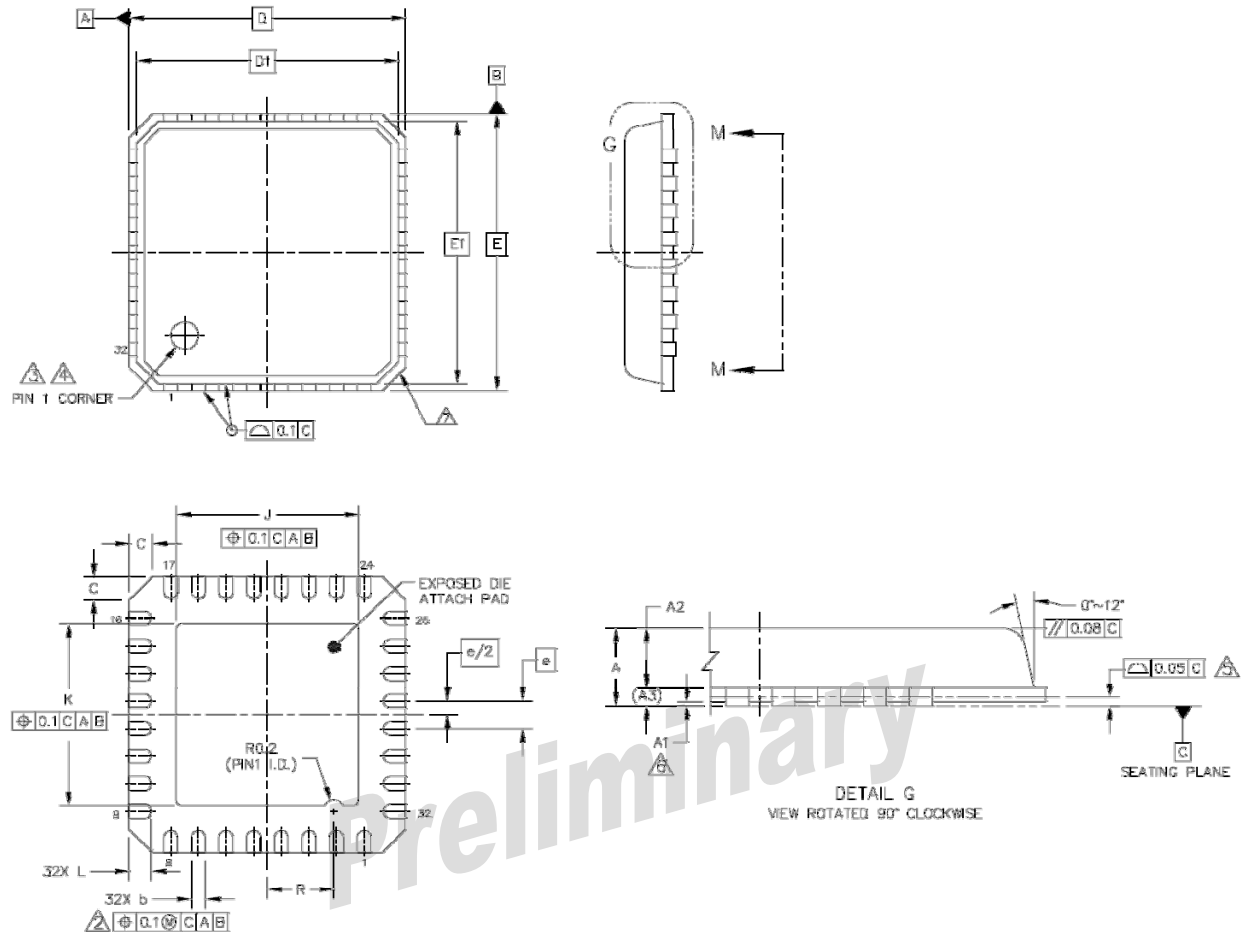

- CONFIDENTIAL -

## DEVICE MARKING

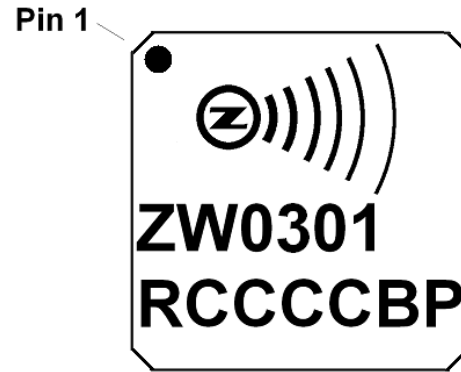

Marking	Meaning
R	Version number
CCCC	Date code (year, week)
B	Wafer lot code (identifier)
P	Package/test plant identification code


Preliminary

- CONFIDENTIAL -

## PROCESS SPECIFICATION

Specification	Description
MSL-3	Moisture Level Verification tested according to JEDEC J-STD-020C
RoHS	Designed in compliance with The Restriction of Hazardous Substances Directive (RoHS)

## Reflow Profile

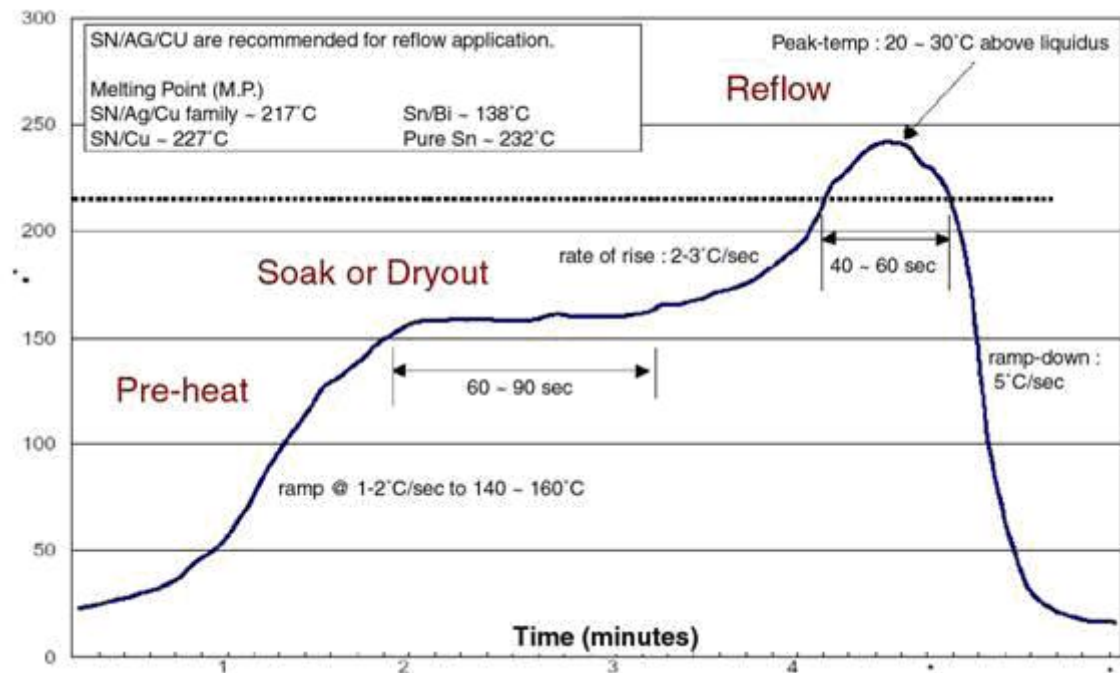

## TABLE OF CONTENTS

Summary .....	1
General Description .....	1
Features .....	1
Development Tools .....	2
Architectural Overview .....	2
Supply Regulators .....	3
XTAL and System Clock .....	3
Power-On-Reset / Brown-out Circuit .....	3
RF Transceiver .....	3
8051 MCU including Timer 0 & 1 .....	3
GPT .....	3
Wake Up Timer .....	4
SFR .....	4
32 kbyte Flash Memory .....	4
256 byte IRAM .....	4
2 kbyte XRAM .....	4
Interrupt Controller .....	4
Trio Controller .....	4
ADC .....	4
Serial Peripheral Interface - SPI .....	5
UART .....	5
Power Control .....	5
I/O Interfaces .....	5
Pin Definitions .....	5
System Interface .....	7
Clock Signals .....	8
Reset .....	8
RF Transceiver .....	8
UART .....	9
External Interrupts .....	9
Trio Controller .....	10
ADC .....	11
Serial Peripheral Interface - SPI .....	11
Decoupling and Supply Considerations .....	13
Connecting Unused Inputs .....	13
Absolute Maximum Ratings .....	14
Recommended Operating Conditions .....	14
Electrical Characteristics – Power Consumption .....	15
Electrical Characteristics - DC .....	16
Output Characteristic .....	17
Electrical Characteristics - AC .....	18
Capacitive Loading .....	18
Electrical Characteristics - RF .....	19
Timing Parameters .....	20
Pin Configuration .....	21
Package Outline Dimensions .....	22
Device Marking .....	23
Process Specification .....	24
Reflow Profile .....	24
Table of Contents .....	25

## BOOKMARKS (THIS PAGE IS NOT A PART OF THE DATASHEET)

Document Part Number: 903501601  
Device: **ZW0301**  
Programmable Output Power Min: -20  
Programmable Output Power Max: 0  
Signature Bytes: 7F-7F-7F-7F-1F-XX-XX (hex)  
Flash Memory Endurance (P/E cycles): 1.000  
Internal pull up resistor: 50k $\Omega$   
Recommended Primary Clock frequency: 32 / 16  
Write Cycle Time @32MHz : 001010  
Write Cycle Time @16MHz : 000101  
Minimum ADC conversion time: 44  
Total XTAL tolerance including ageing: 27  
Maximum ADC frequency: 250 kHz  
ADC Sampling frequency 8 bit : 23.6 k  
ADC Sampling frequency 12 bit : 10.9 k  
EU Frequency: 868.42 MHz (EU)  
Antenna EU: 8.2 cm  
US Frequency 908.42 MHz (US)  
Antenna US: 7.8 cm  
Sensitivity 9.6: -104 dBm  
Sensitivity 40: -101 dBm  
IP3: -6 dBm  
SPI setup time: TBD ns  
SPI hold time: TBD ns  
High Strength : 6 mA

### *Current Consumption:*

Lowest power state @ 3,3V : 2.5  
MCU and memory @3.3V, XTAL 32MHz, MCU 8 MHz: 5.2  
Receiving @3,3V, XTAL 32 MHz, MCU 8 MHz: 23  
Transmitting @3,3V, XTAL 32 MHz, MCU 16 MHz -5dBm : 24  
Transmitting @3,3V, XTAL 32 MHz, MCU 16 MHz, Max: 36