Magnetism

Part 2
(Lorentz Force & Electric Motor)

Trains in many cities use electric motors to transport millions of people to and from work each day. In the first part of this chapter, we are going to look at how an electric motor works. An electric motor creates motion from an electric current.

An Electric Motor CREATES MOTION from an electric current

LEARNING OBJECTIVES

PHYSICS ONLY

- Know that there is a force on a charged particle when it moves in a magnetic field as long as its motion is not parallel to the field

- Understand why a force is exerted on a current-carrying wire in a magnetic field, and how this effect is applied in simple d.c. electric motors and loudspeakers
- Use the left-hand rule to predict the direction of the resulting force when a wire carries a current perpendicular to a magnetic field
- Describe how the force on a current-carrying conductor in a magnetic field changes with the magnitude and direction of the field and current

MOVEMENT FROM ELECTRICITY

When a charged particle moves through a magnetic field it experiences a force, as long as its motion is not parallel to the field. We can demonstrate this effect by passing electrons (that is, an electric current) along a wire that is placed in a magnetic field as shown in Figure 21.2. When the switch is closed and electrons flow, the wire will try to move upwards.

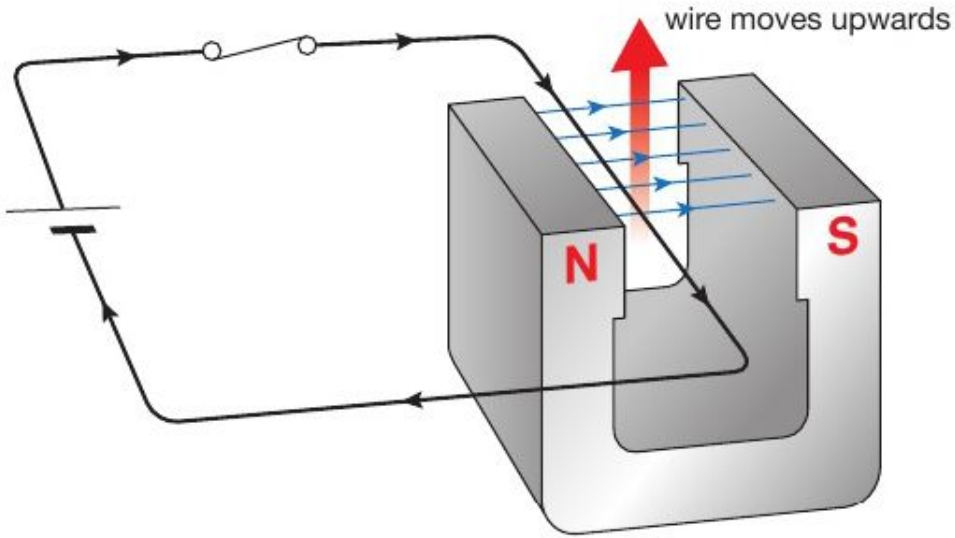

▲ Figure 21.2 The wire moves where there is a current in it.

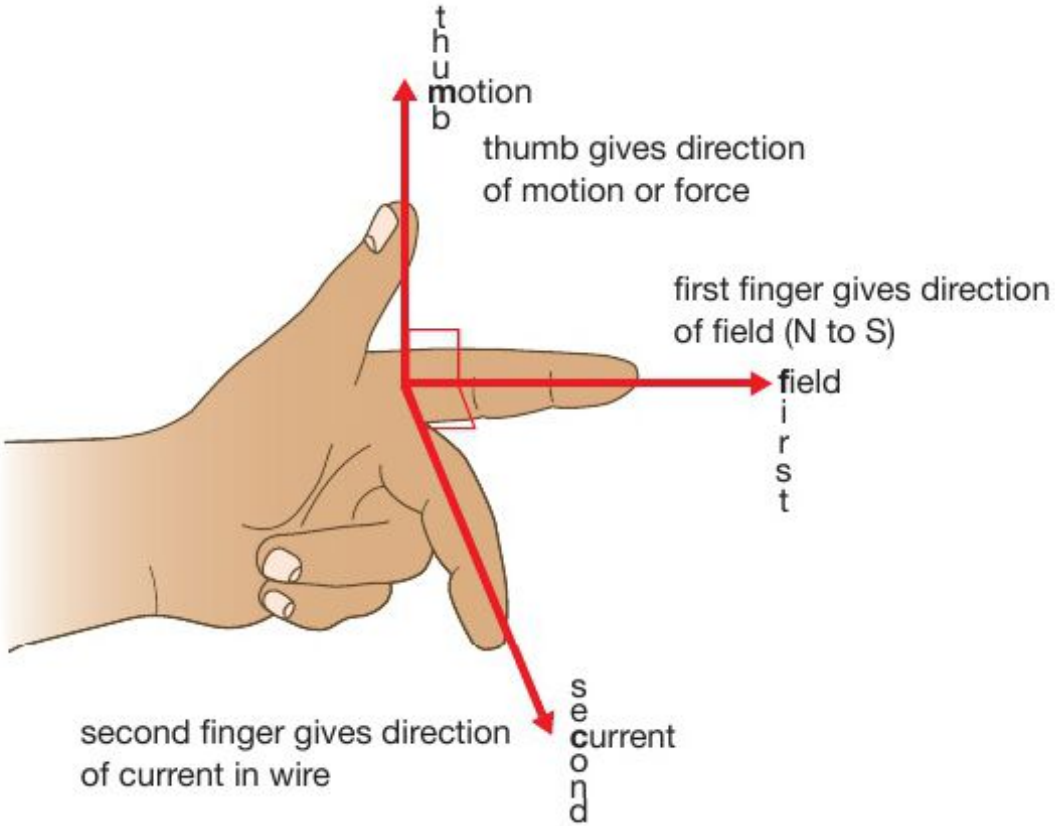

▲ Figure 21.5 Fleming's left-hand rule helps you to work out the direction of the force.

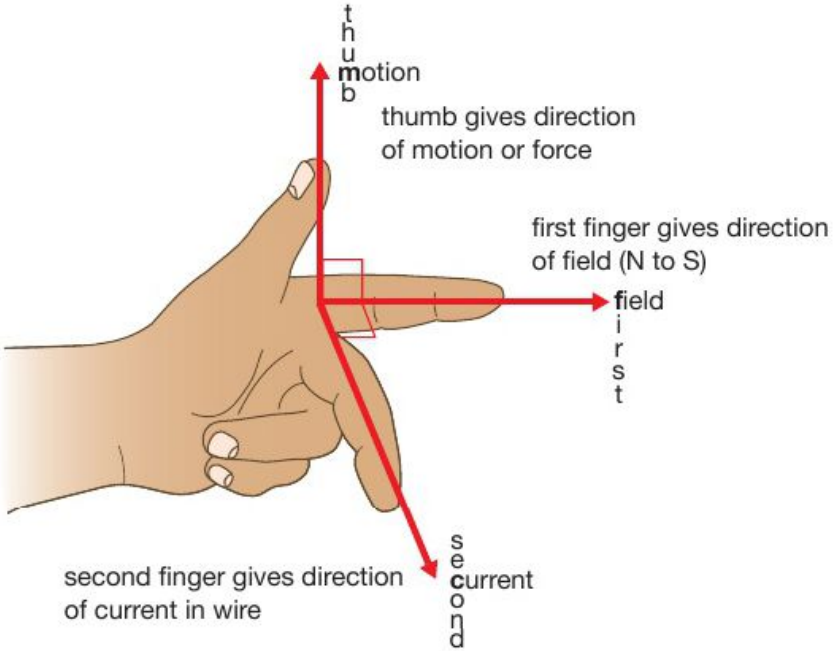

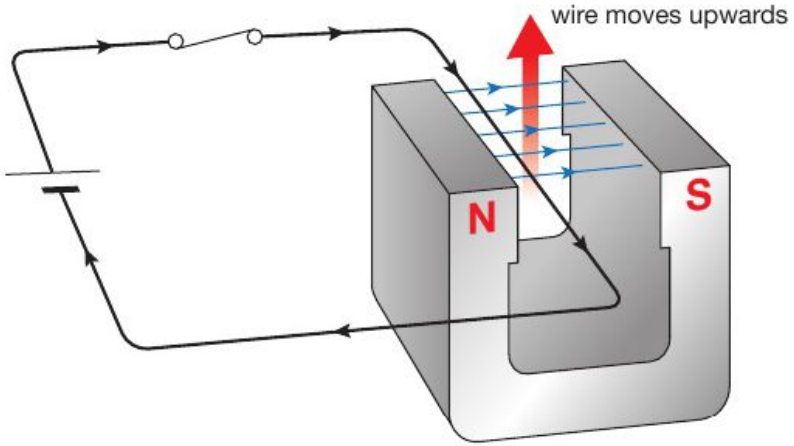

The wire moves where there is a current in it.

A stronger force will be produced if the magnetic field is stronger or if the current is increased.

If we change the direction of the current or the magnet's field, a different overlapping pattern is created and we will see the wire move in the opposite direction.

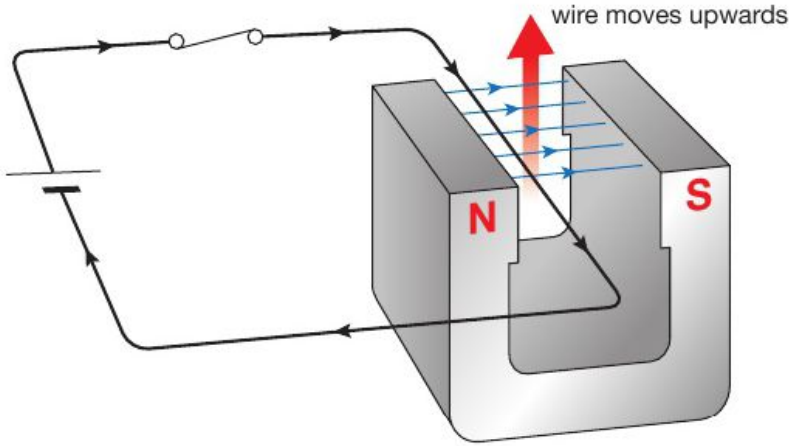

The wire moves where there is a current in it.

THE MOVING-COIL LOUDSPEAKER

The moving-coil loudspeaker uses the motor effect to transfer electrical energy to sound energy.

- Electric currents from a source, such as a radio, pass through the coils of a speaker.
- These currents, which represent sounds, are always changing in size and direction, like vibrating sound waves.
- The fields of the coil and the permanent magnet are therefore creating magnetic field patterns which are also always changing in strength and direction.
- These fields in turn apply rapidly changing forces to the wires of the coil, which cause the speaker cone to vibrate.
- These vibrations create the sound waves we hear.

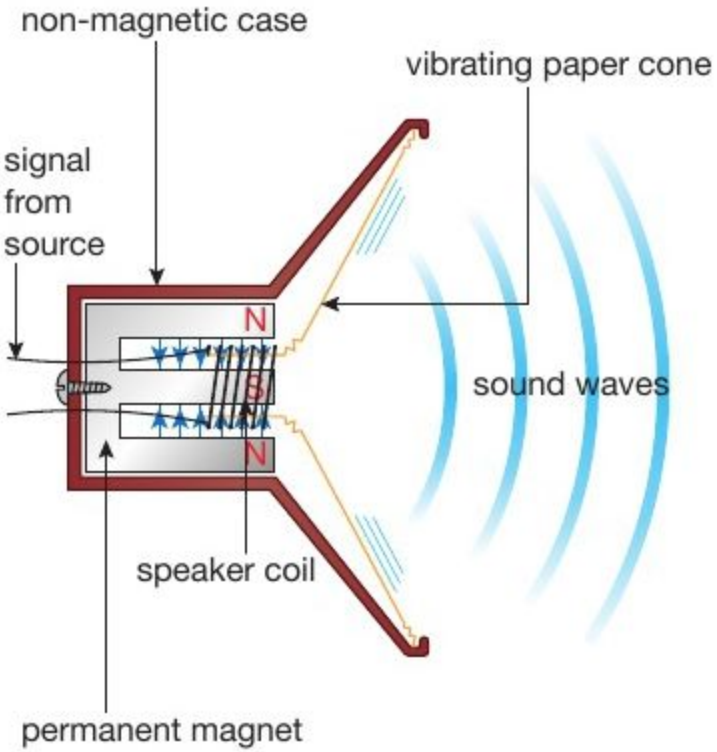

▲ Figure 21.6 A loudspeaker transfers electrical energy to sound energy.

THE ELECTRIC MOTOR

The electric motor is one of the most important uses of the motor effect. Figure 21.7 shows the most important features of a simple d.c. electric motor.

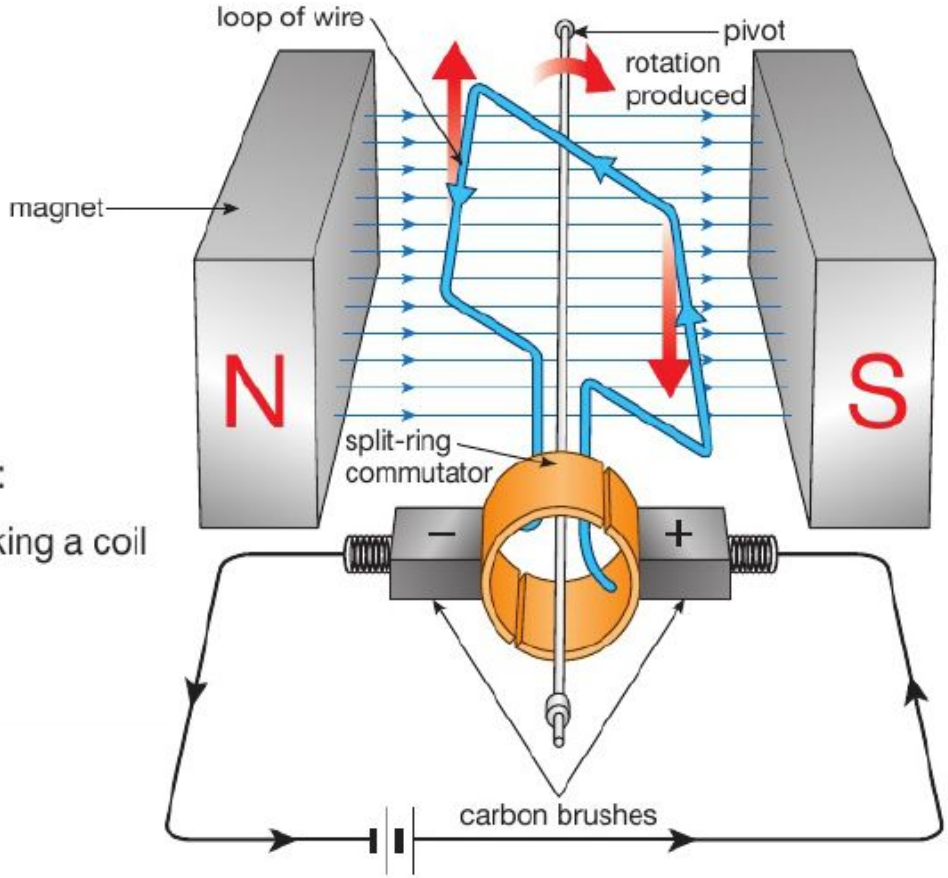

▲ Figure 21.7 A simple electric motor

To increase the rate at which the motor turns we can:

1. increase the number of turns or loops of wire, making a coil
2. increase the strength of the magnetic field
3. increase the current in the loop of wire.

APPLICATION:

Any more application??

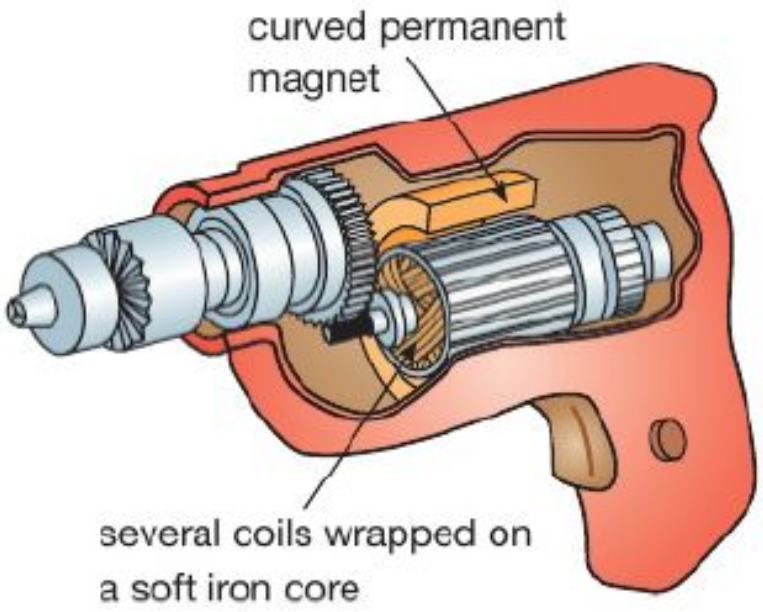

▲ Figure 21.8 A real electric motor

Good Luck & Happy Reading

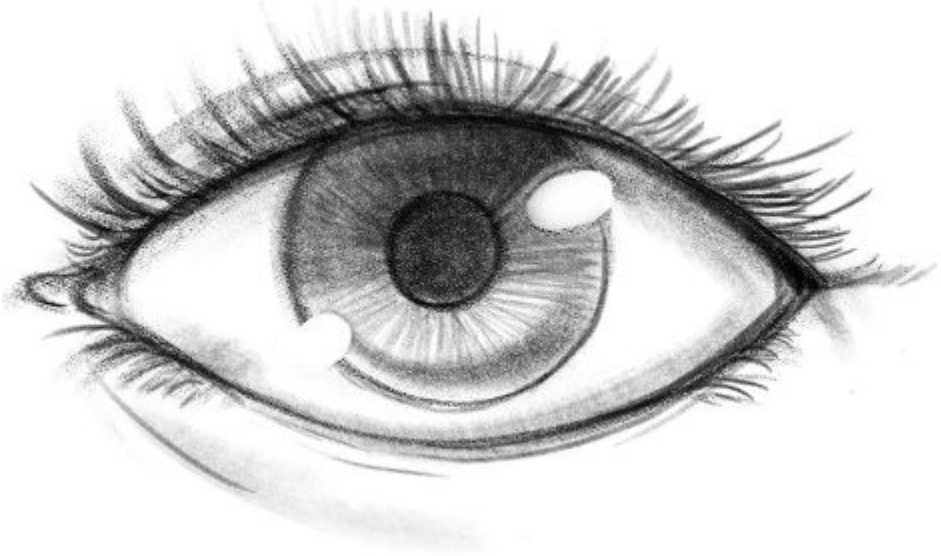

Magnetism

Part 1

LEARNING OBJECTIVES

- Know that magnets repel and attract other magnets and attract magnetic substances
- Describe the properties of magnetically hard and soft materials
- Practical: investigate the magnetic field pattern for a permanent bar magnet and between two bar magnets
- Understand the term magnetic field line
- Know that magnetism is induced in some materials when they are placed in a magnetic field
- Describe how to use two permanent magnets to produce a uniform magnetic field pattern
- Know that an electric current in a conductor produces a magnetic field around it

PHYSICS ONLY

- Describe the construction of electromagnets
- Draw magnetic field patterns for a straight wire, a flat circular coil and a solenoid when each is carrying a current

MAGNETISM AND MAGNETIC MATERIALS

Magnets are able to attract objects made from magnetic materials such as iron, steel, nickel and cobalt. Magnets cannot attract objects made from materials such as plastic, wood, paper or rubber. These are non-magnetic materials.

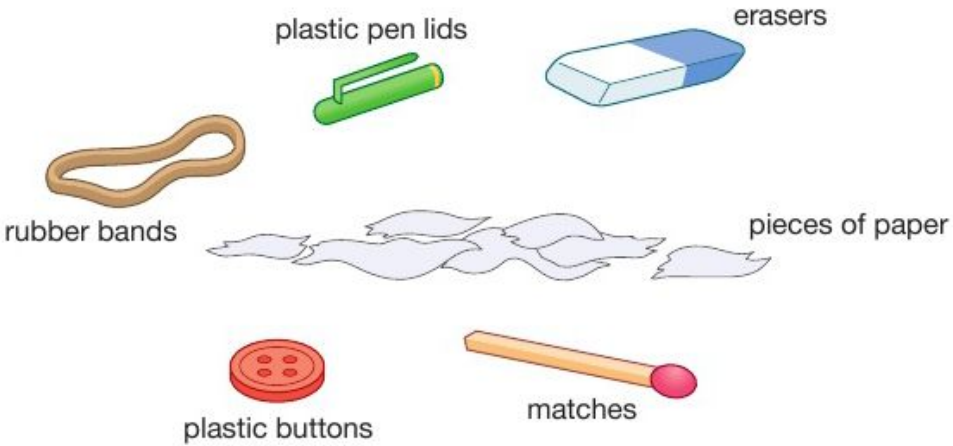

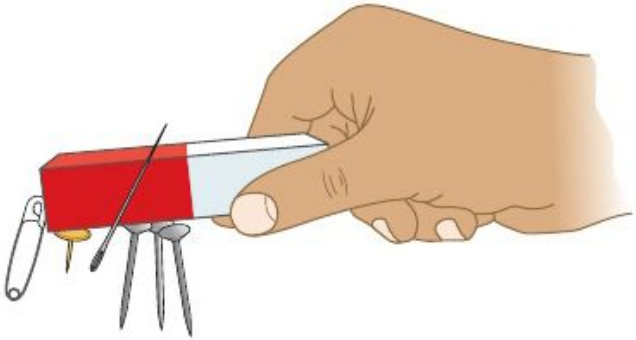

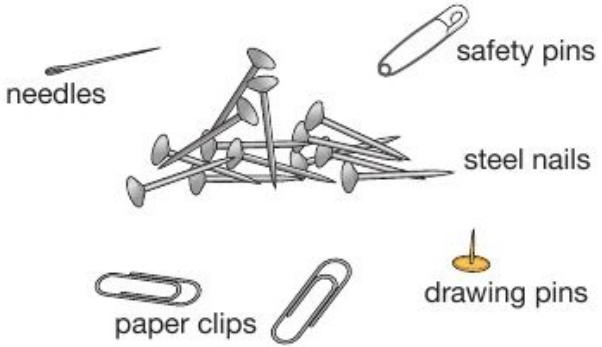

MAGNETS

The strongest parts of a magnet are called its poles. Most magnets have two poles. These are called the north pole and the south pole.

If two similar poles are placed near to each other they repel. If two dissimilar (opposite) poles are placed near to each other they attract.

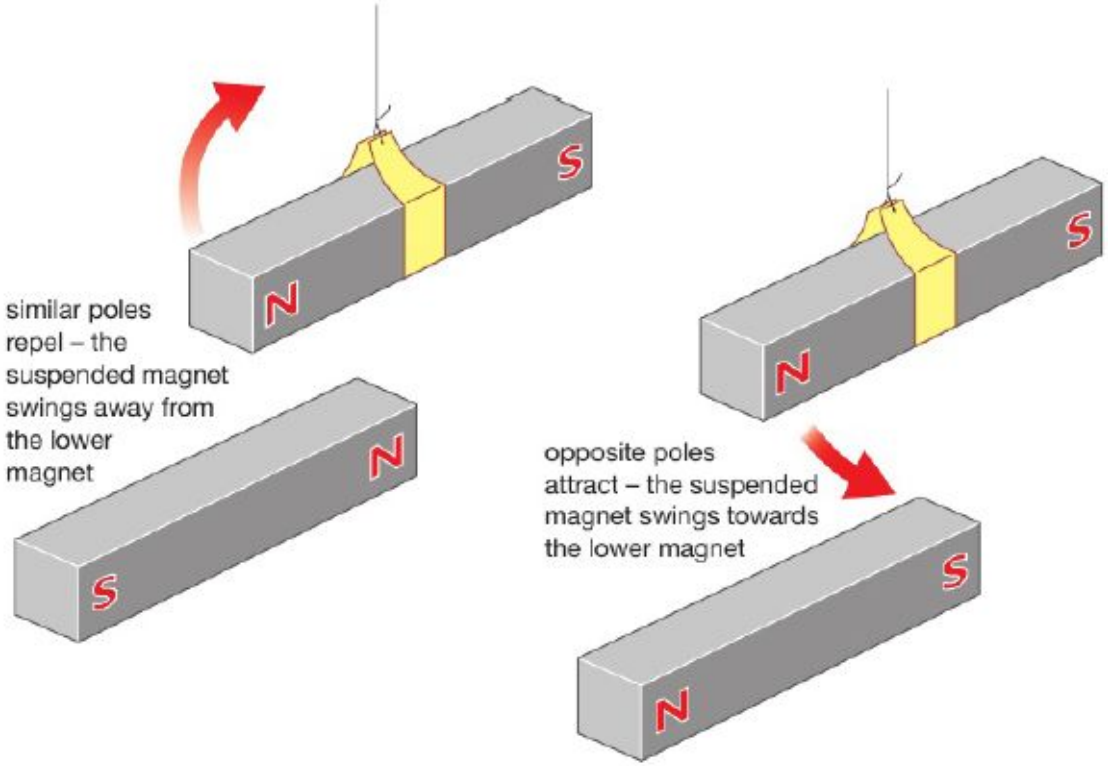

Permanent magnets like the bar magnets shown in Figure 20.3 are made from a magnetically hard material such as steel. A magnetically hard material keeps its magnetism once it has been magnetised. Iron is a magnetically soft material and is not suitable for a permanent magnet. Magnetically soft materials lose their magnetism easily and are therefore useful as temporary magnets.

MAGNETIC FIELDS

Around every magnet there is a volume of space where we can detect magnetism. This volume of space is called a **magnetic field**. Normally a magnetic field cannot be seen but we can use iron filings or plotting compasses to show its shape and discover something about its strength and direction.

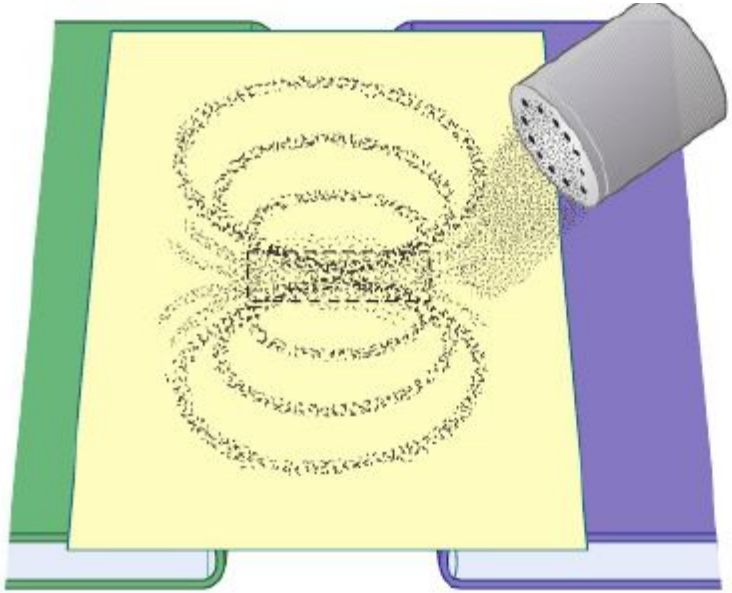

if you make a pencil dot at the end of the needle in each position of the compass, you can plot the field line

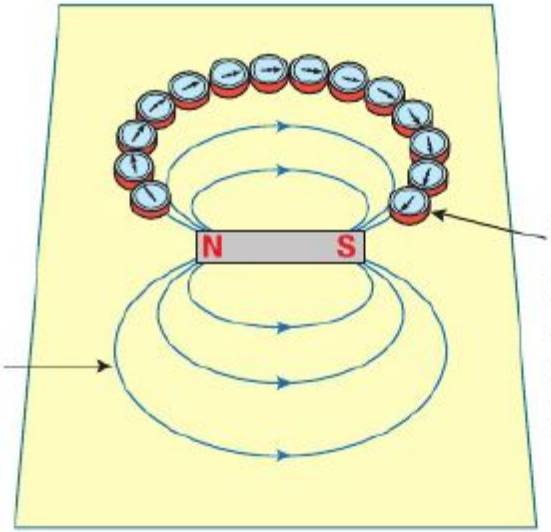

in each position, the needle of the plotting compass lines up with the field line, pointing from north to south

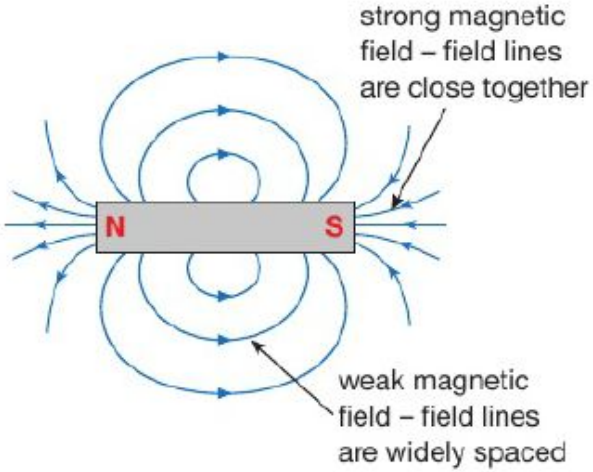

We draw magnetic fields like that in Figure 20.5 using magnetic field lines. Magnetic field lines don't really exist but they help us to visualise the main features of a magnetic field.

The magnetic field lines:

- show the shape of the magnetic field
- show the direction of the magnetic force – the field lines 'travel' from north to south
- show the strength of the magnetic field – the field lines are closest together where the magnetic field is strongest.

OVERLAPPING MAGNETIC FIELDS

If two magnets are placed near each other, their magnetic fields overlap and affect each other. We can investigate this using iron filings or plotting compasses. Figure 20.6 shows the different field patterns we would see.

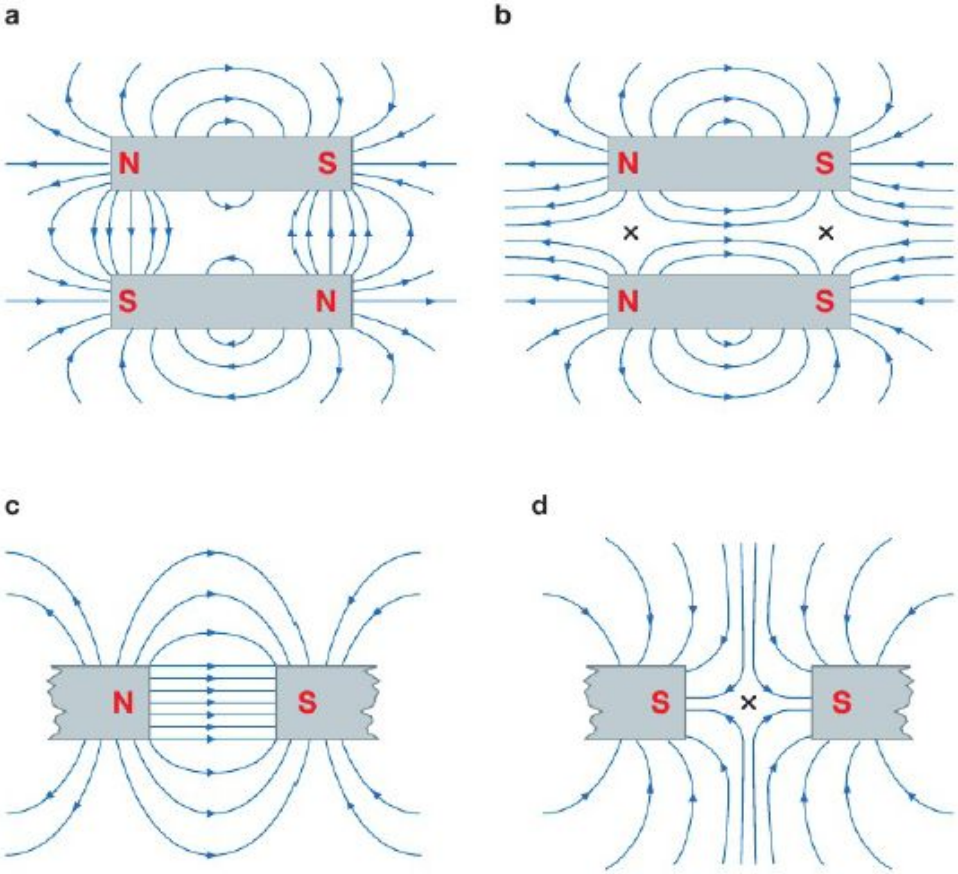

CREATING A UNIFORM MAGNETIC FIELD

If we look very carefully at the magnetic field created between the north pole of one magnet and the south pole of a different magnet we will see that the field is shown as a series of straight field lines that are evenly spaced. A field like this is described as a uniform magnetic field – that is, its strength and direction is the same everywhere. Creating a uniform field like this is extremely useful as we will see later in this chapter and in the next chapter.

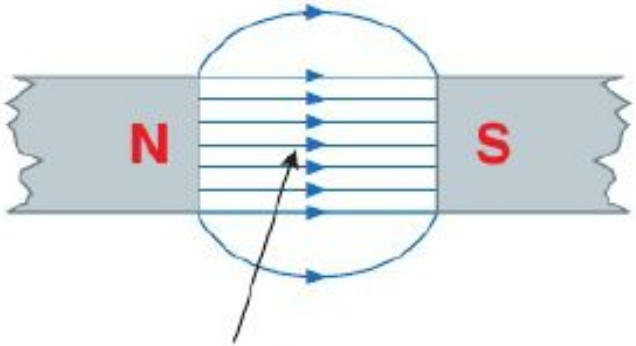

uniform field between the poles of the magnets

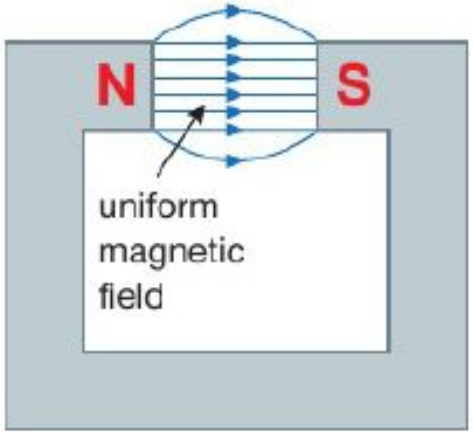

u-shaped permanent magnets can be used to create a uniform magnetic field

INDUCED MAGNETISM

If we place an object made from a magnetic material, for example, an iron nail, inside a magnetic field it becomes a magnet. We say that magnetism has been induced in the nail. Because iron is a magnetically soft material, its induced magnetism is temporary and disappears if the permanent magnet is removed. If the nail is made from a magnetically hard material such as steel it will retain some of its magnetism after the magnet is removed.

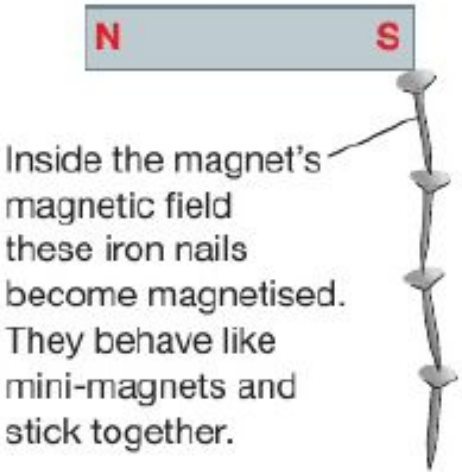

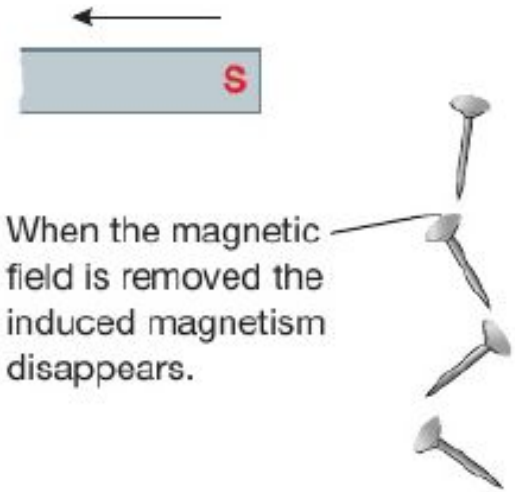

ELECTROMAGNETISM

When there is a current in a wire a magnetic field is created around it. This is called electromagnetism. The field around the wire is quite weak and circular in shape.

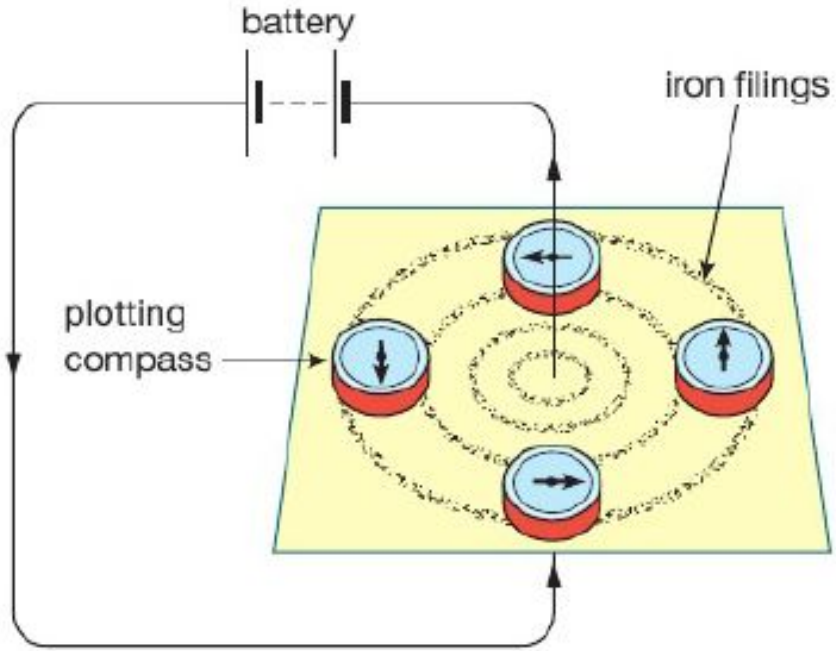

The shape and direction of the magnetic field around a current-carrying wire can be seen using iron filings and plotting compasses.
Changing the direction of the current, changes the direction of the magnetic field.

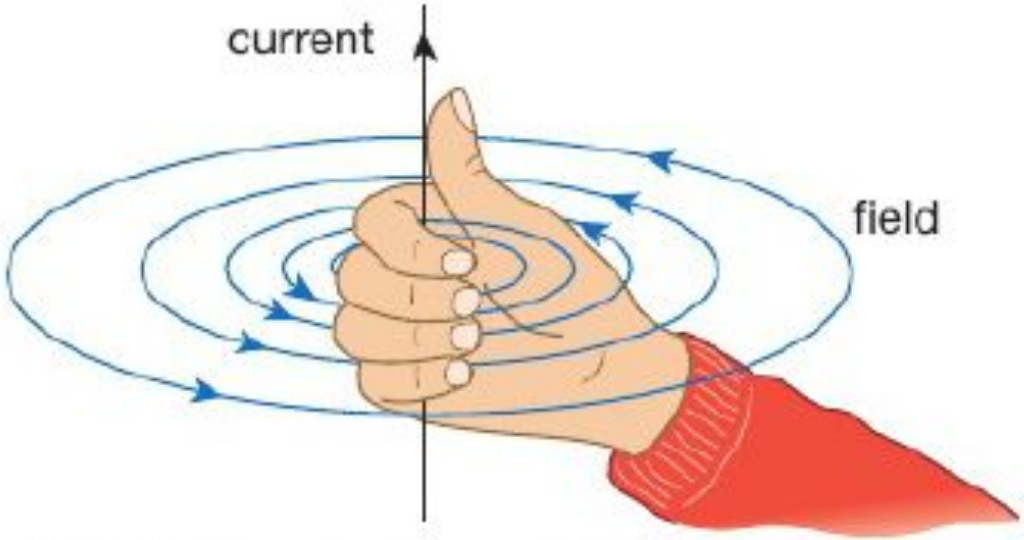

With the thumb of your right hand pointing in the direction of the current, your fingers will curl in the direction of the field.

You can work out the direction of the field using the right-hand grip rule (for fields).

If the wire is made into a flat, single-turn coil (circular wire), the magnetic field around the wire changes shape and is as shown in Figure 20.11.

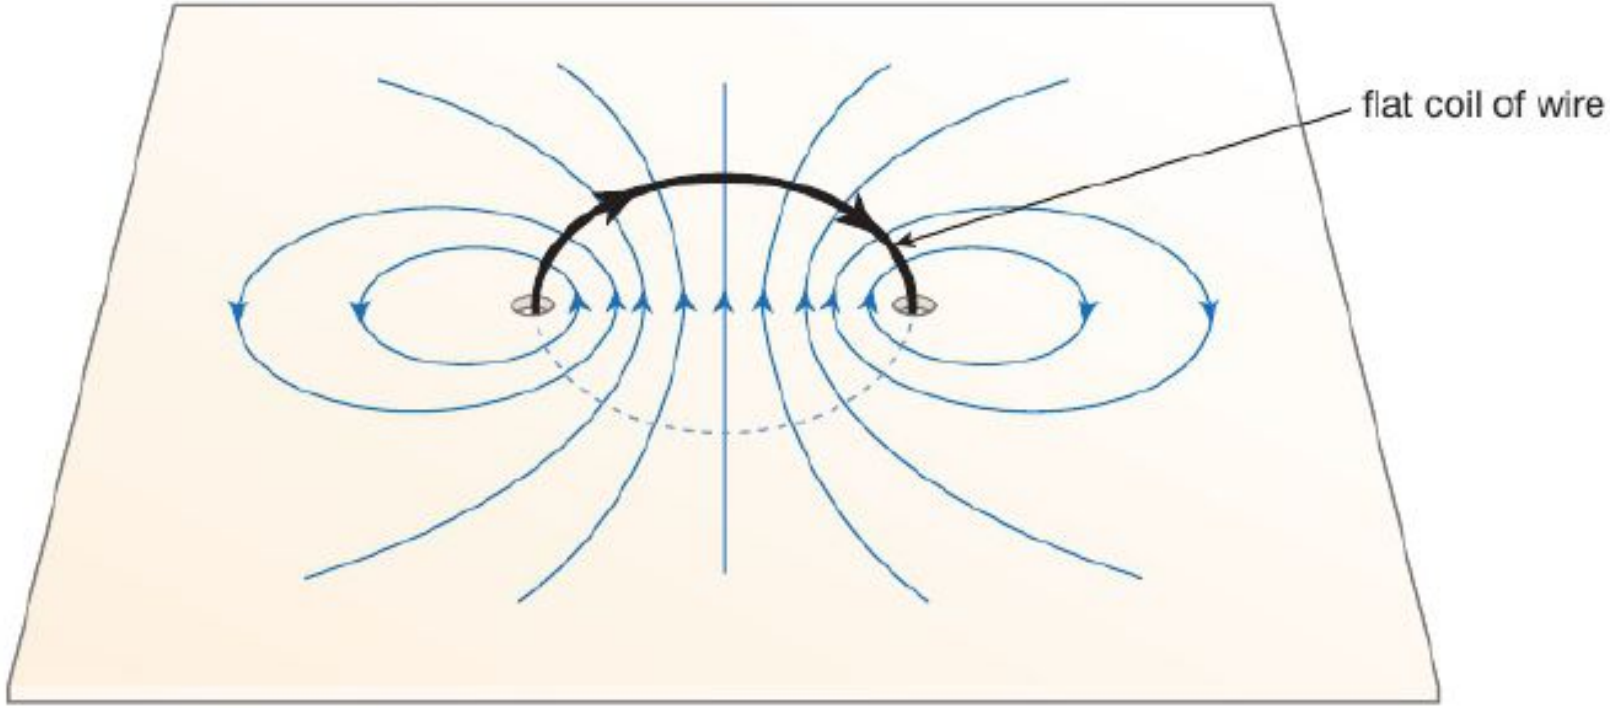

The strength of the magnetic field around a current-carrying wire can be increased by:

1. increasing the current in the wire
2. wrapping the wire into a coil or **solenoid** (a solenoid is a long coil).

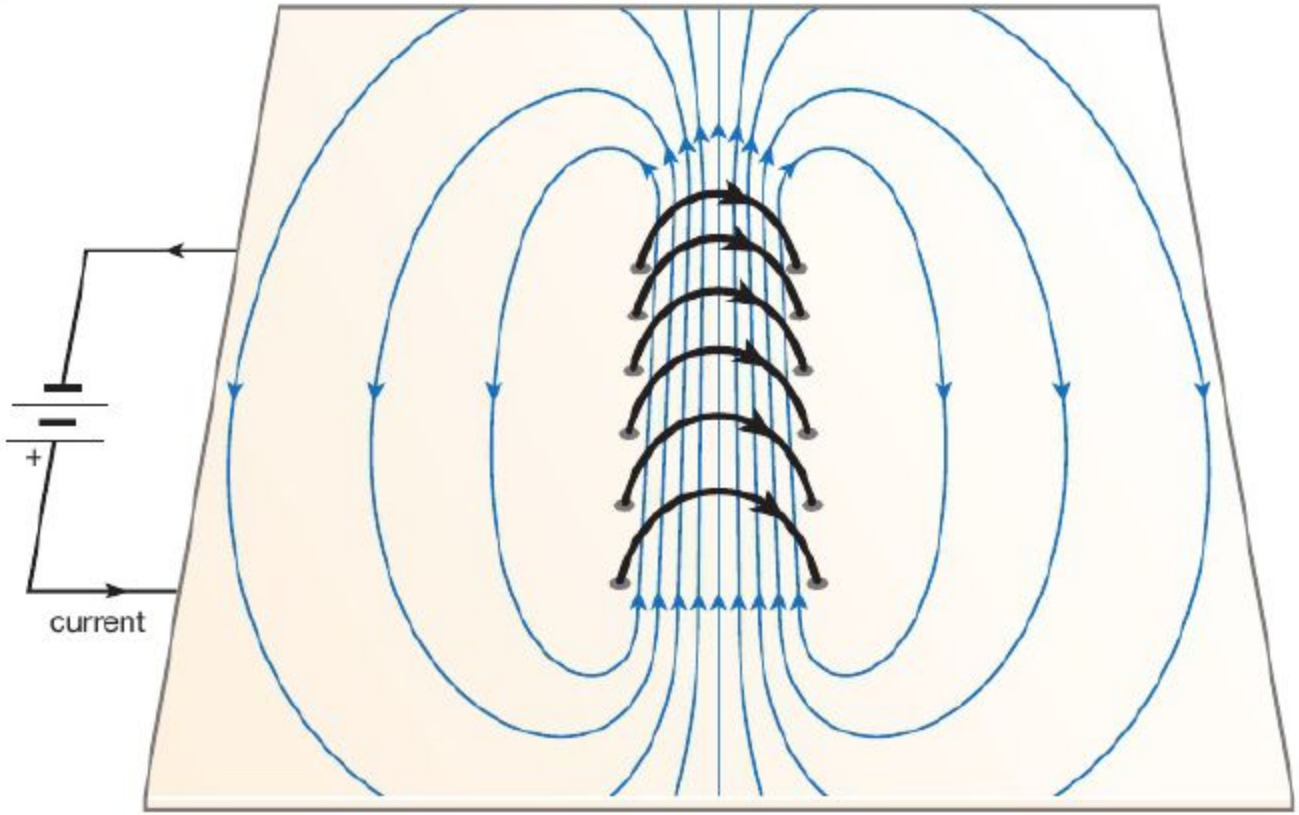

The shape of the magnetic field around a solenoid is the same as that around a bar magnet.

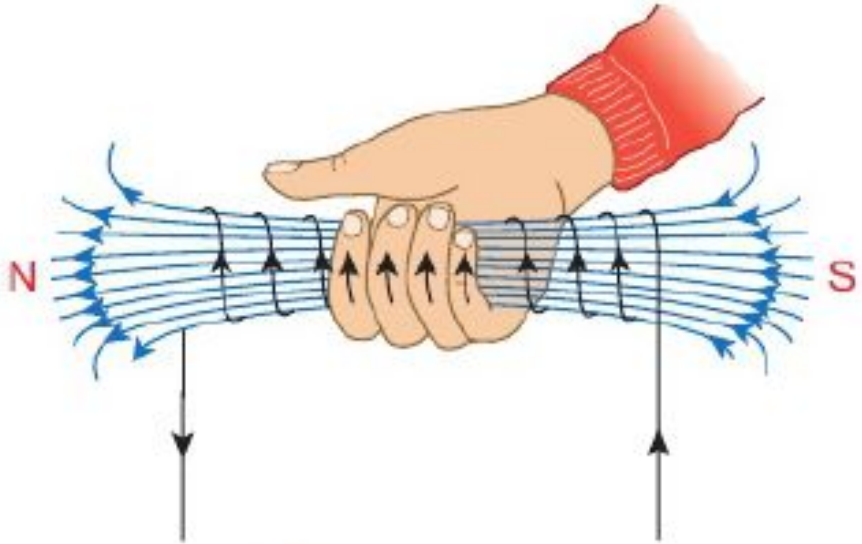

▲ Figure 20.13 You can work out the **polarity** of the solenoid by imagining that your right hand is wrapped around it. Your fingers point in the direction of the current and your thumb points to the north pole of the solenoid. This is the right-hand grip rule (for poles).

The strength of the field around a solenoid can be increased by:

1. increasing the current in the solenoid
2. increasing the number of turns on the solenoid
3. wrapping the solenoid around a magnetically soft core such as iron.

This combination of soft iron core and solenoid is often referred to as an electromagnet.

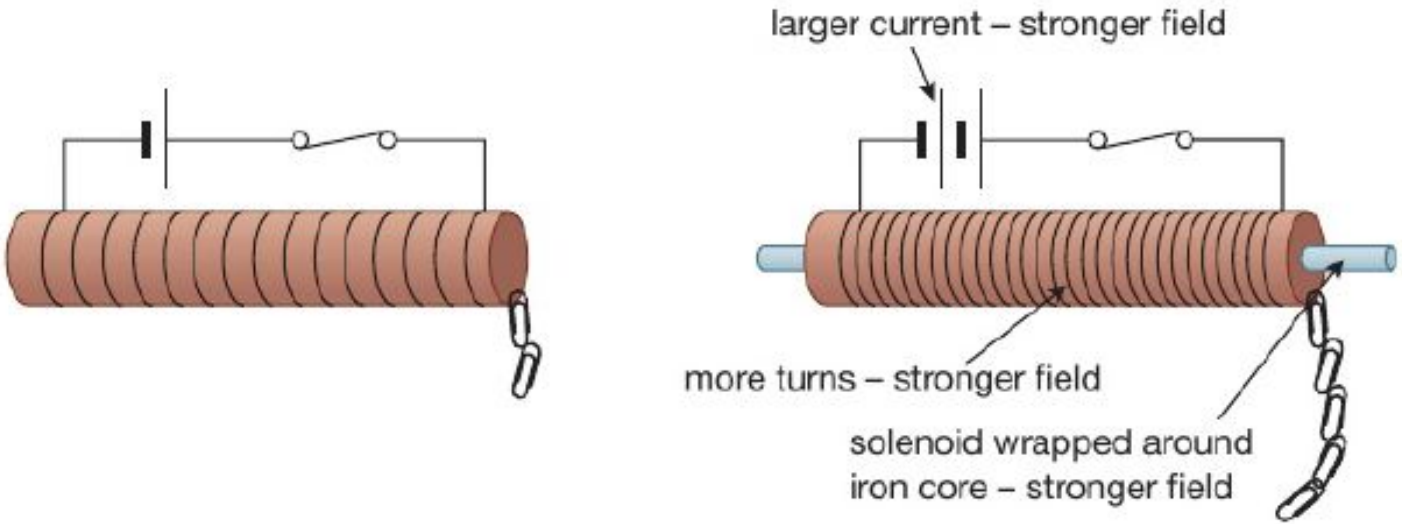

▲ Figure 20.14 Altering the strength of the field around an electromagnet

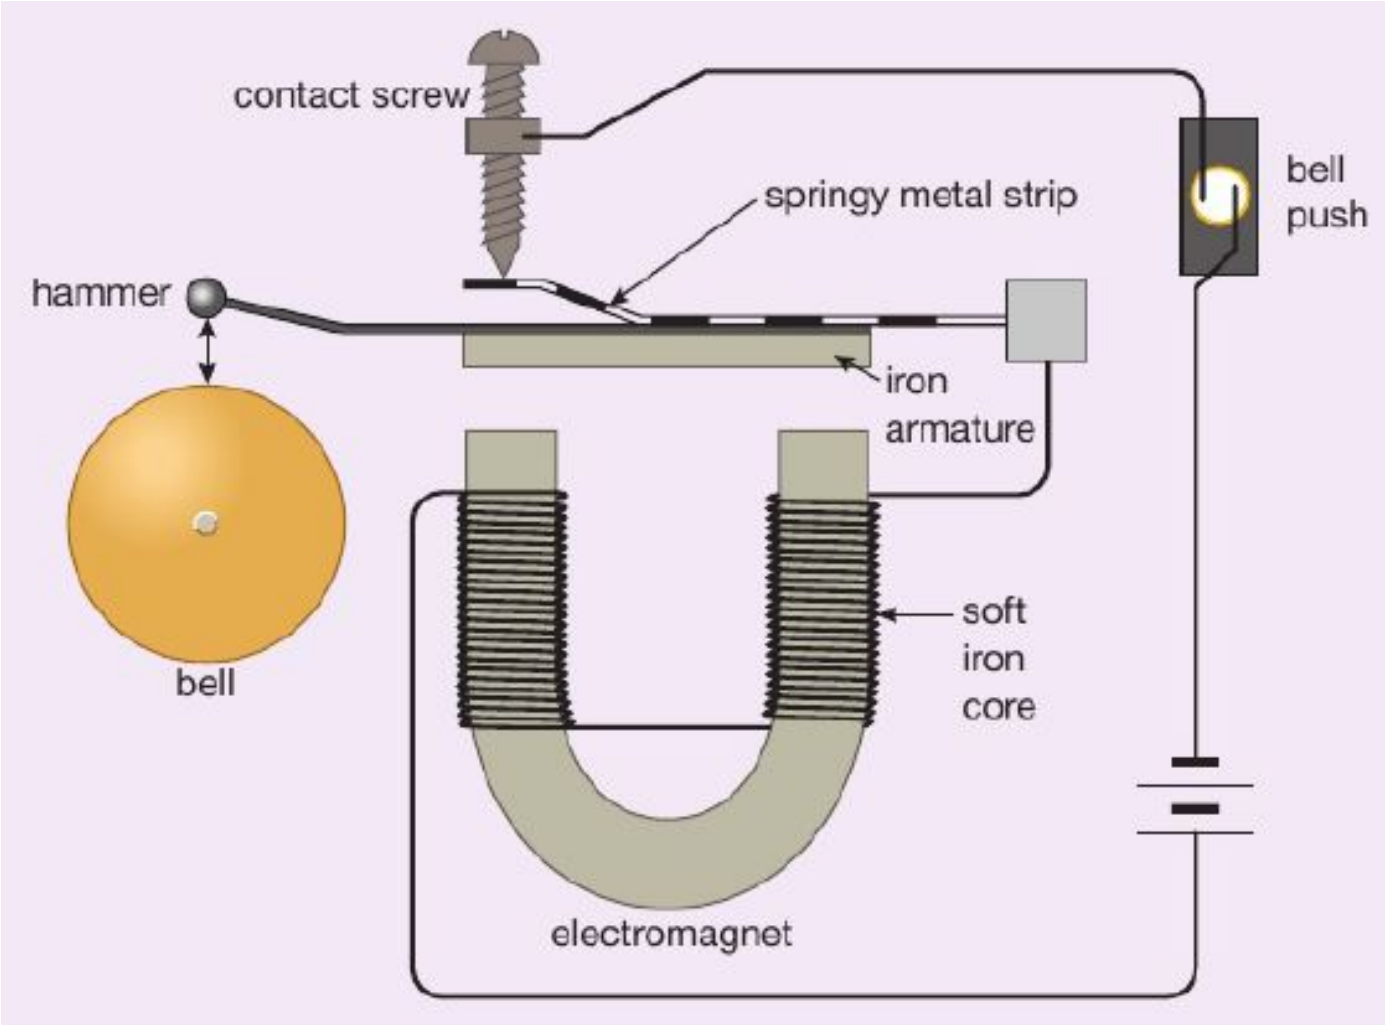
contact screw
springy metal strip
bell
push
hammer
iron
armature
bell
soft
iron
core
electromagnet

Circuit breaker

Circuit breakers also use electromagnets. The circuit breaker in Figure 20.16 uses electromagnetism to cut off the current if it becomes larger than a certain value. If the current is too high the electromagnet becomes strong enough to pull the iron catch out of position so that the contacts open and the circuit breaks. Once the problem in the circuit has been corrected the catch is repositioned by pressing the reset button.

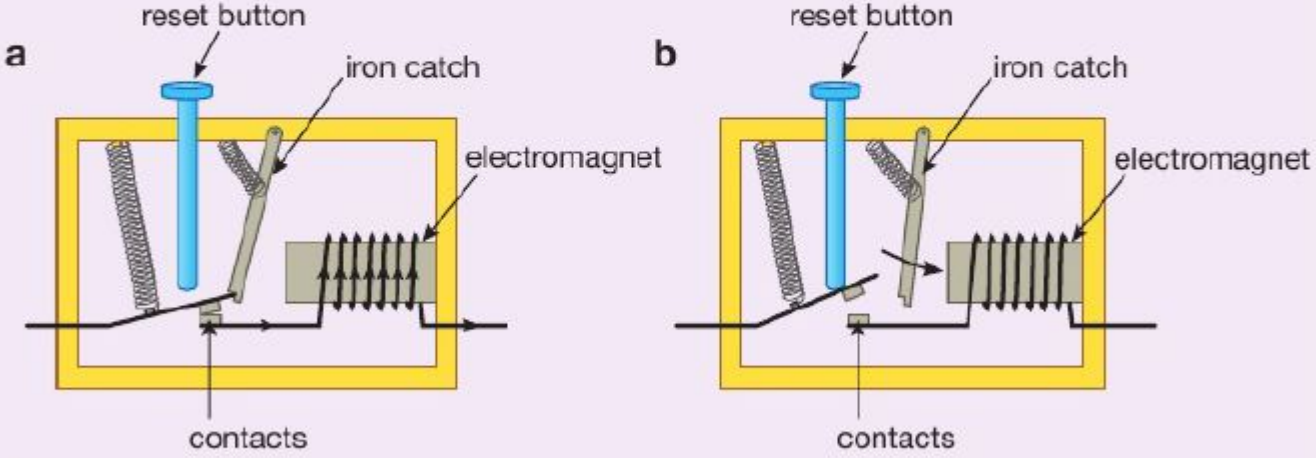

▲ Figure 20.16 **a** The circuit breaker allows a normal sized current. **b** When there is too large a current the circuit becomes incomplete.

Good Luck & Happy Reading

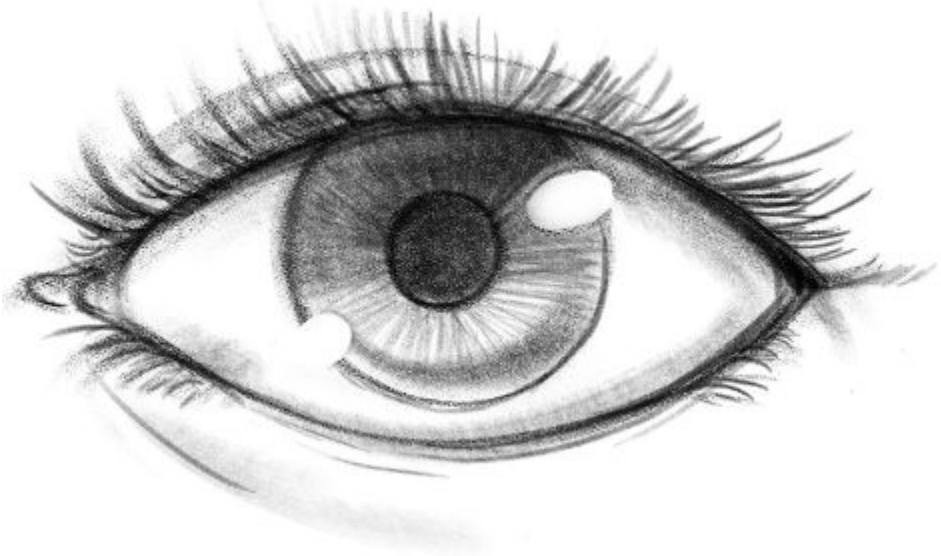

Magnetism

How many poles are there?

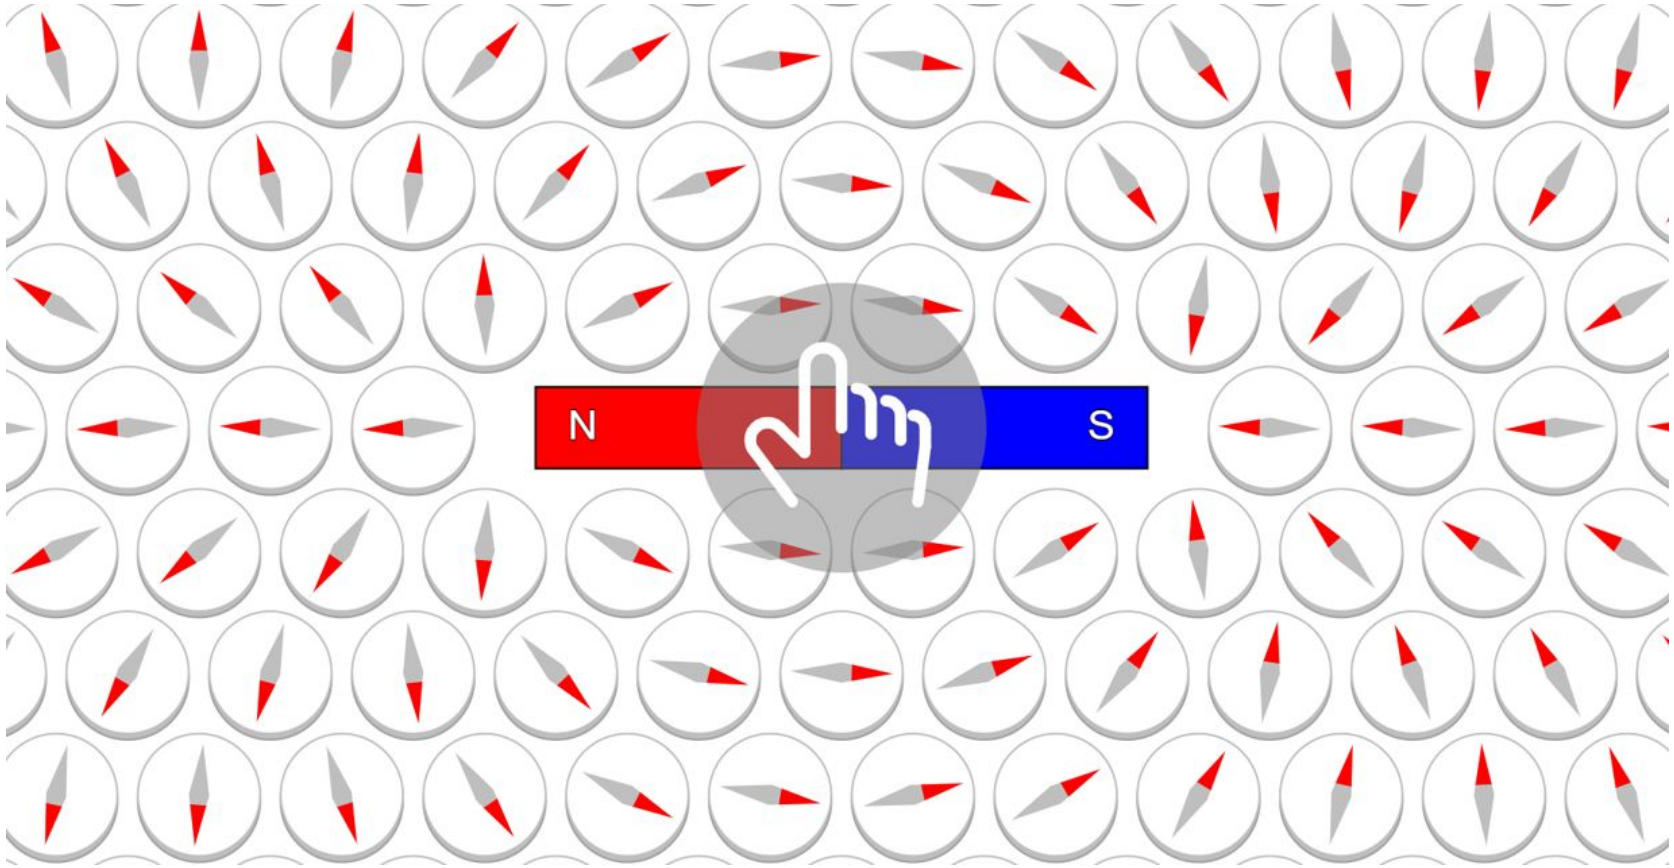

How poles behave and interact?

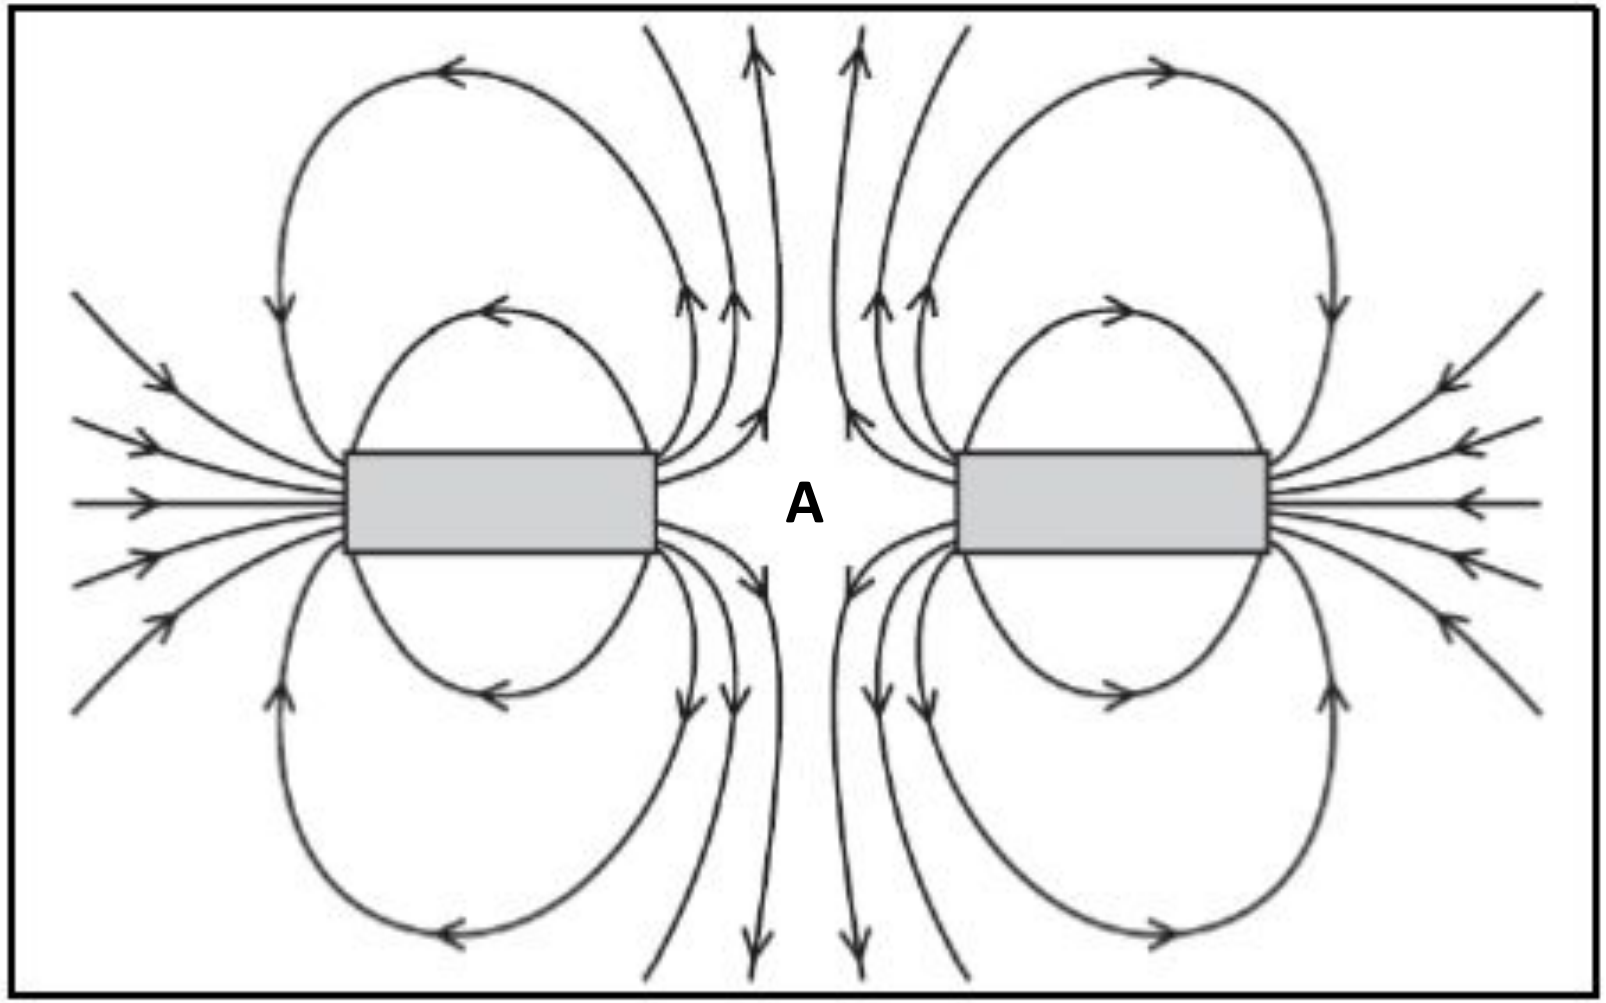

How to make magnets?

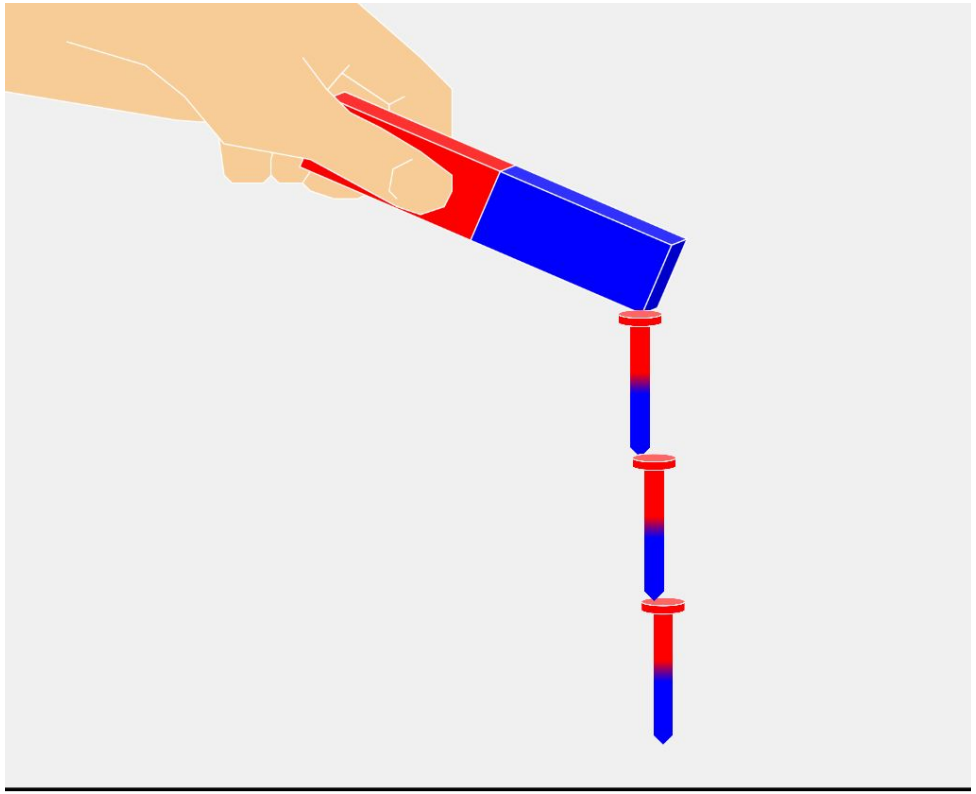

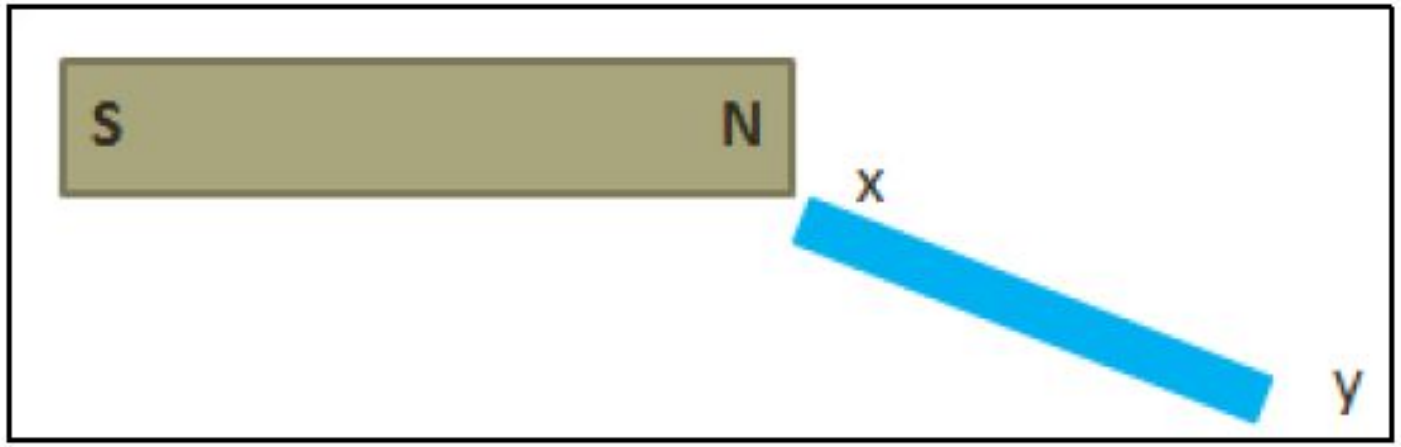

How to make magnets?

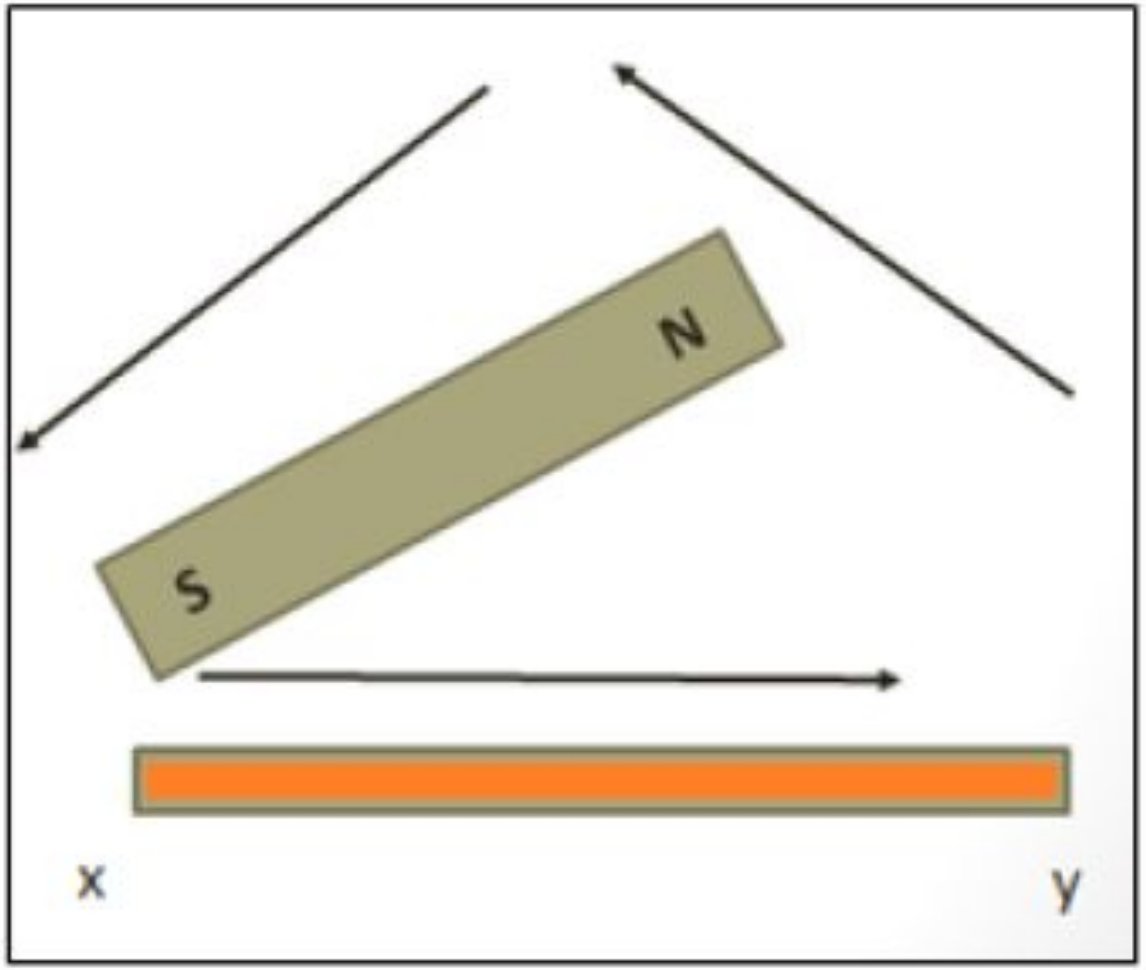

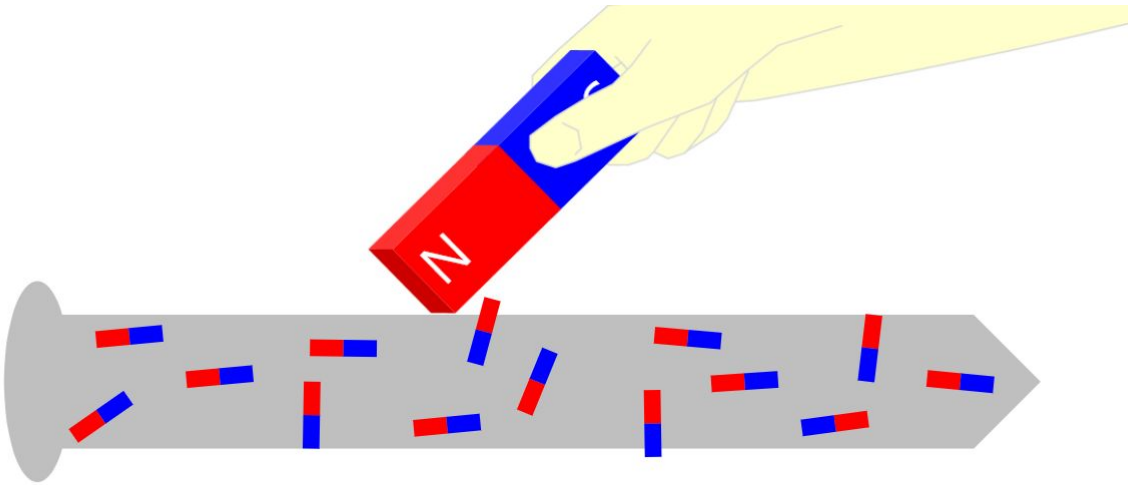

How to make magnets?

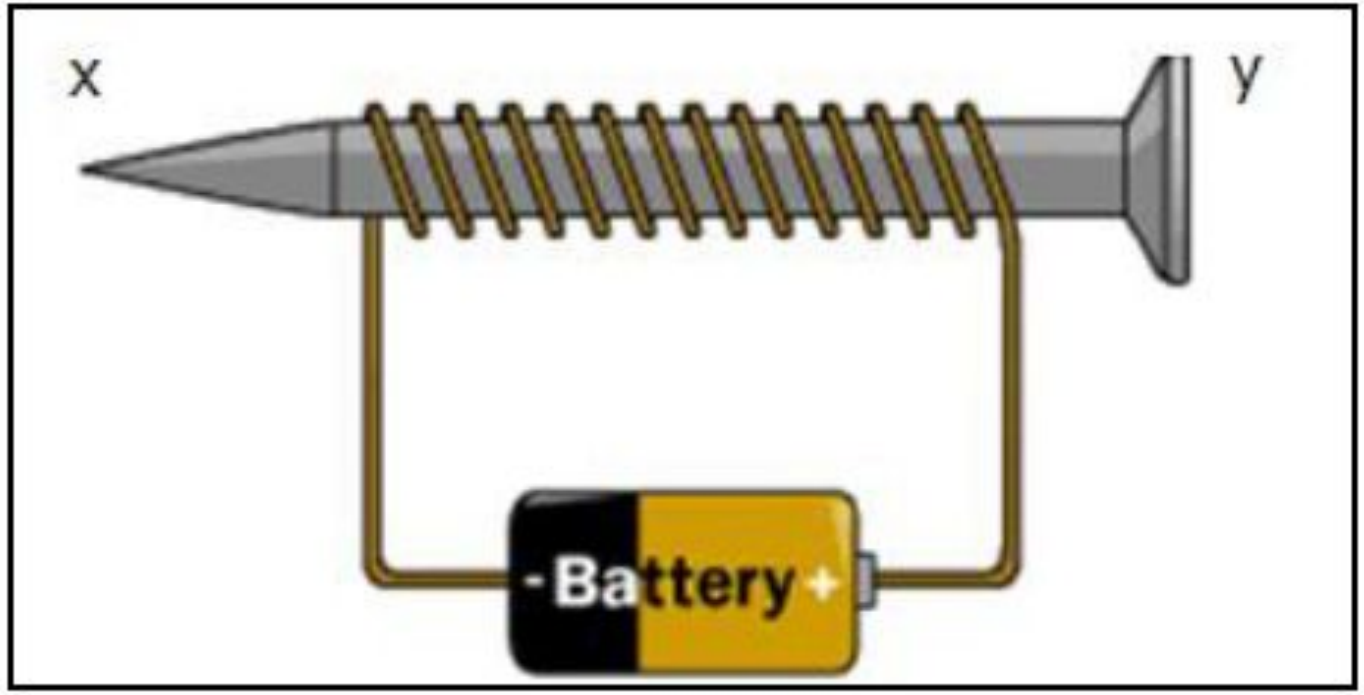

Demagnetization (How to remove magnetism from an object with magnetic property)?

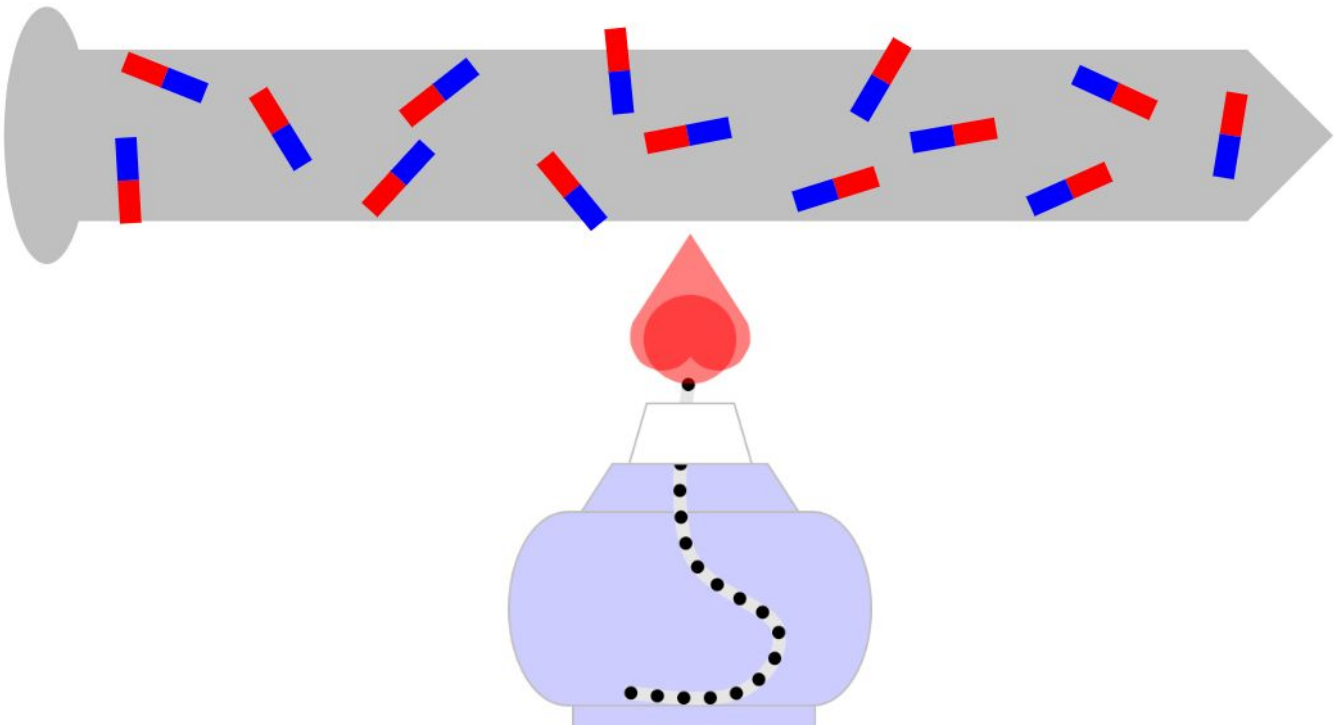

Demagnetization (How to remove magnetism from an object with magnetic property)?

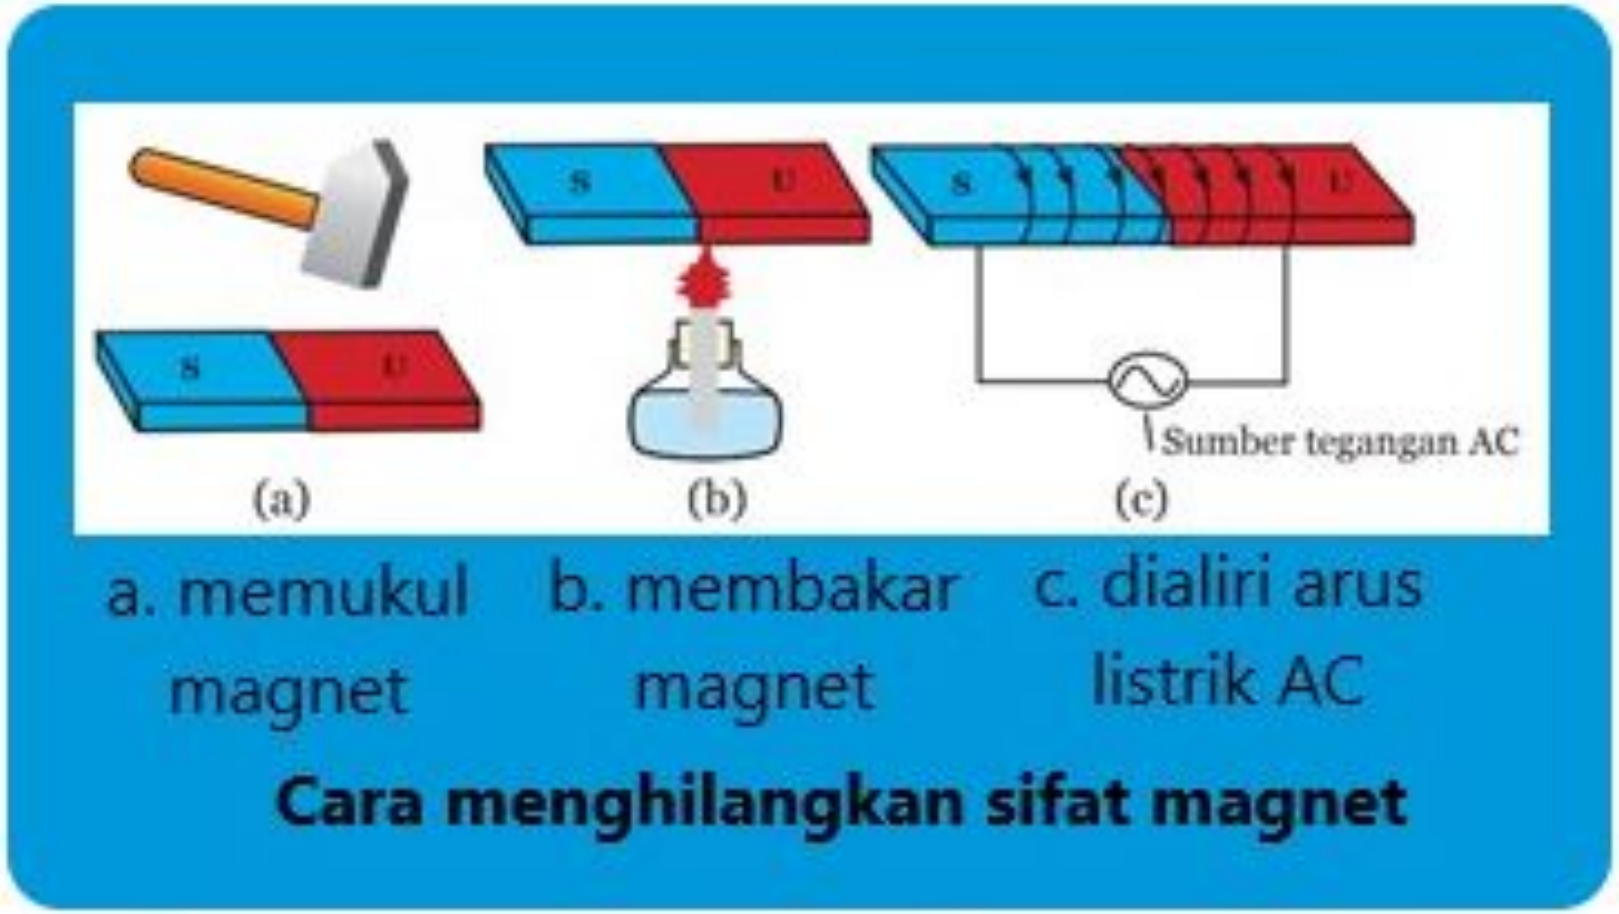

Cara menghilangkan sifat kemagnetan

Magnet poles VS The Earth poles

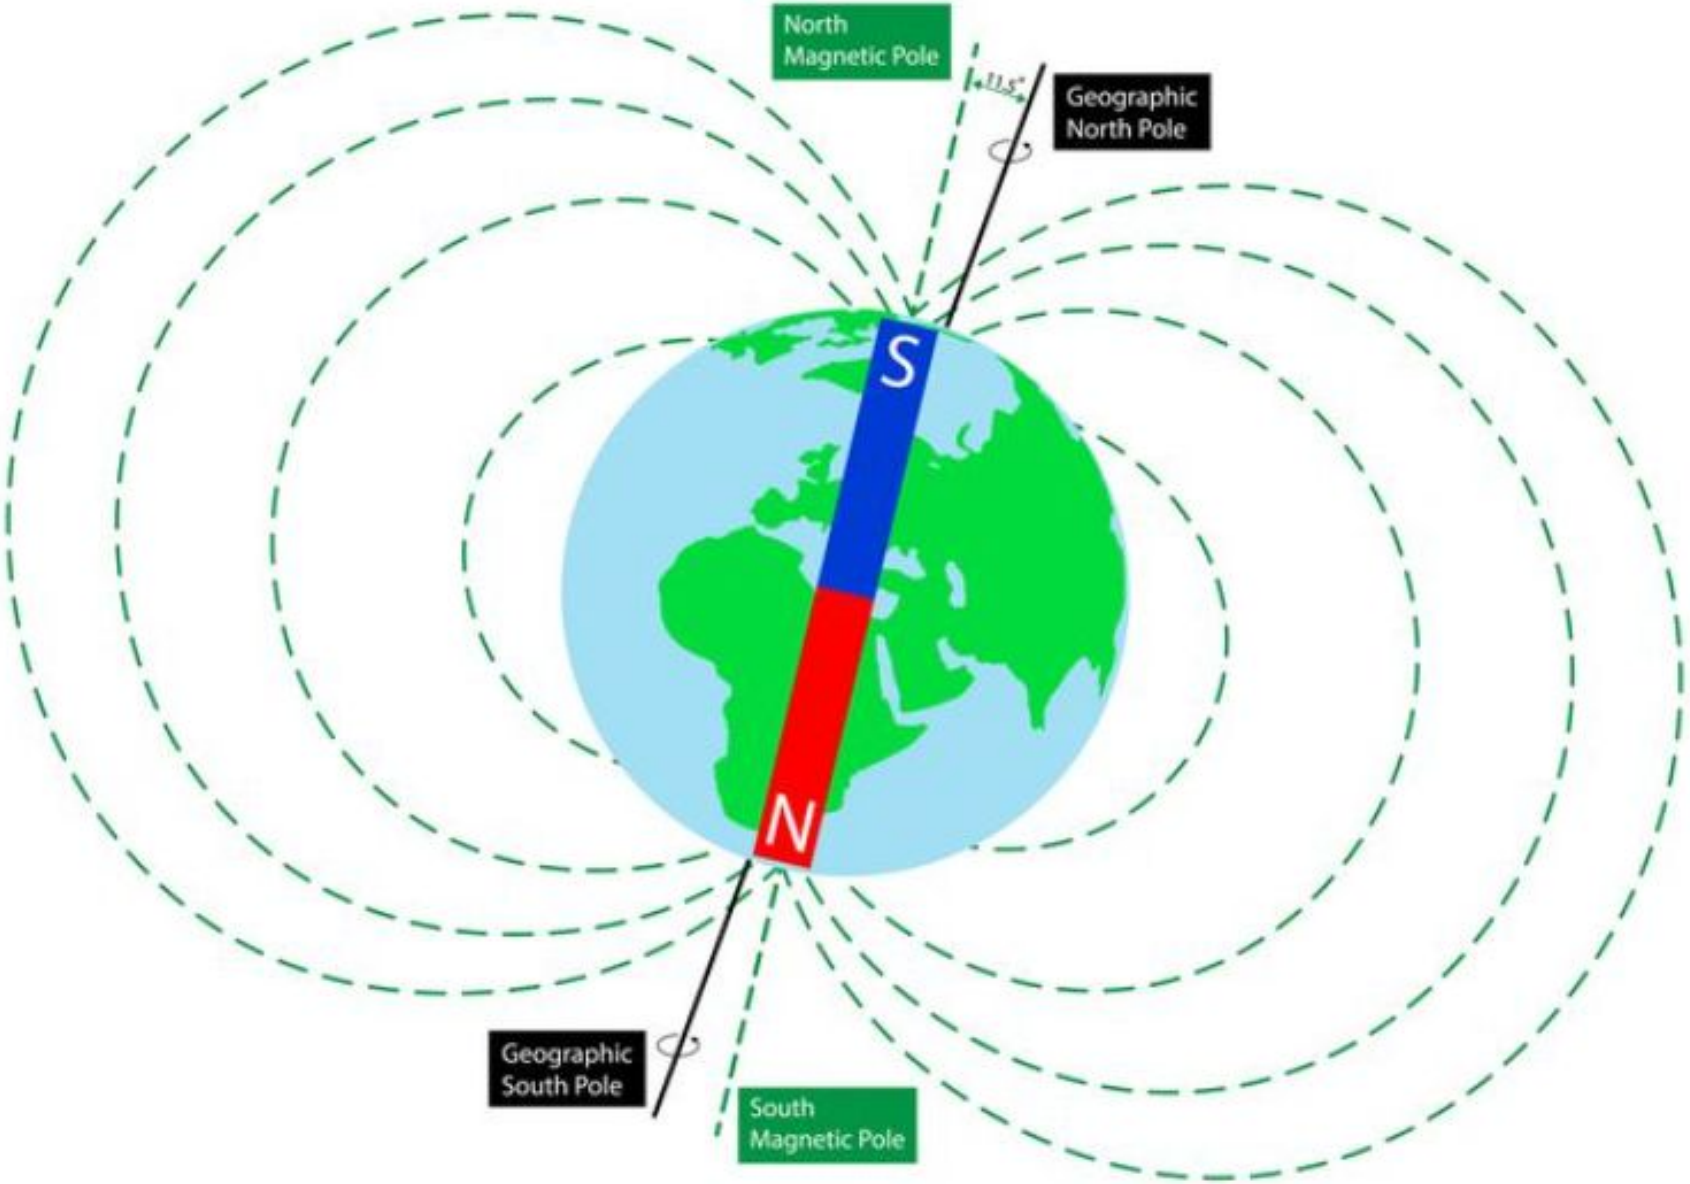

Next lesson?

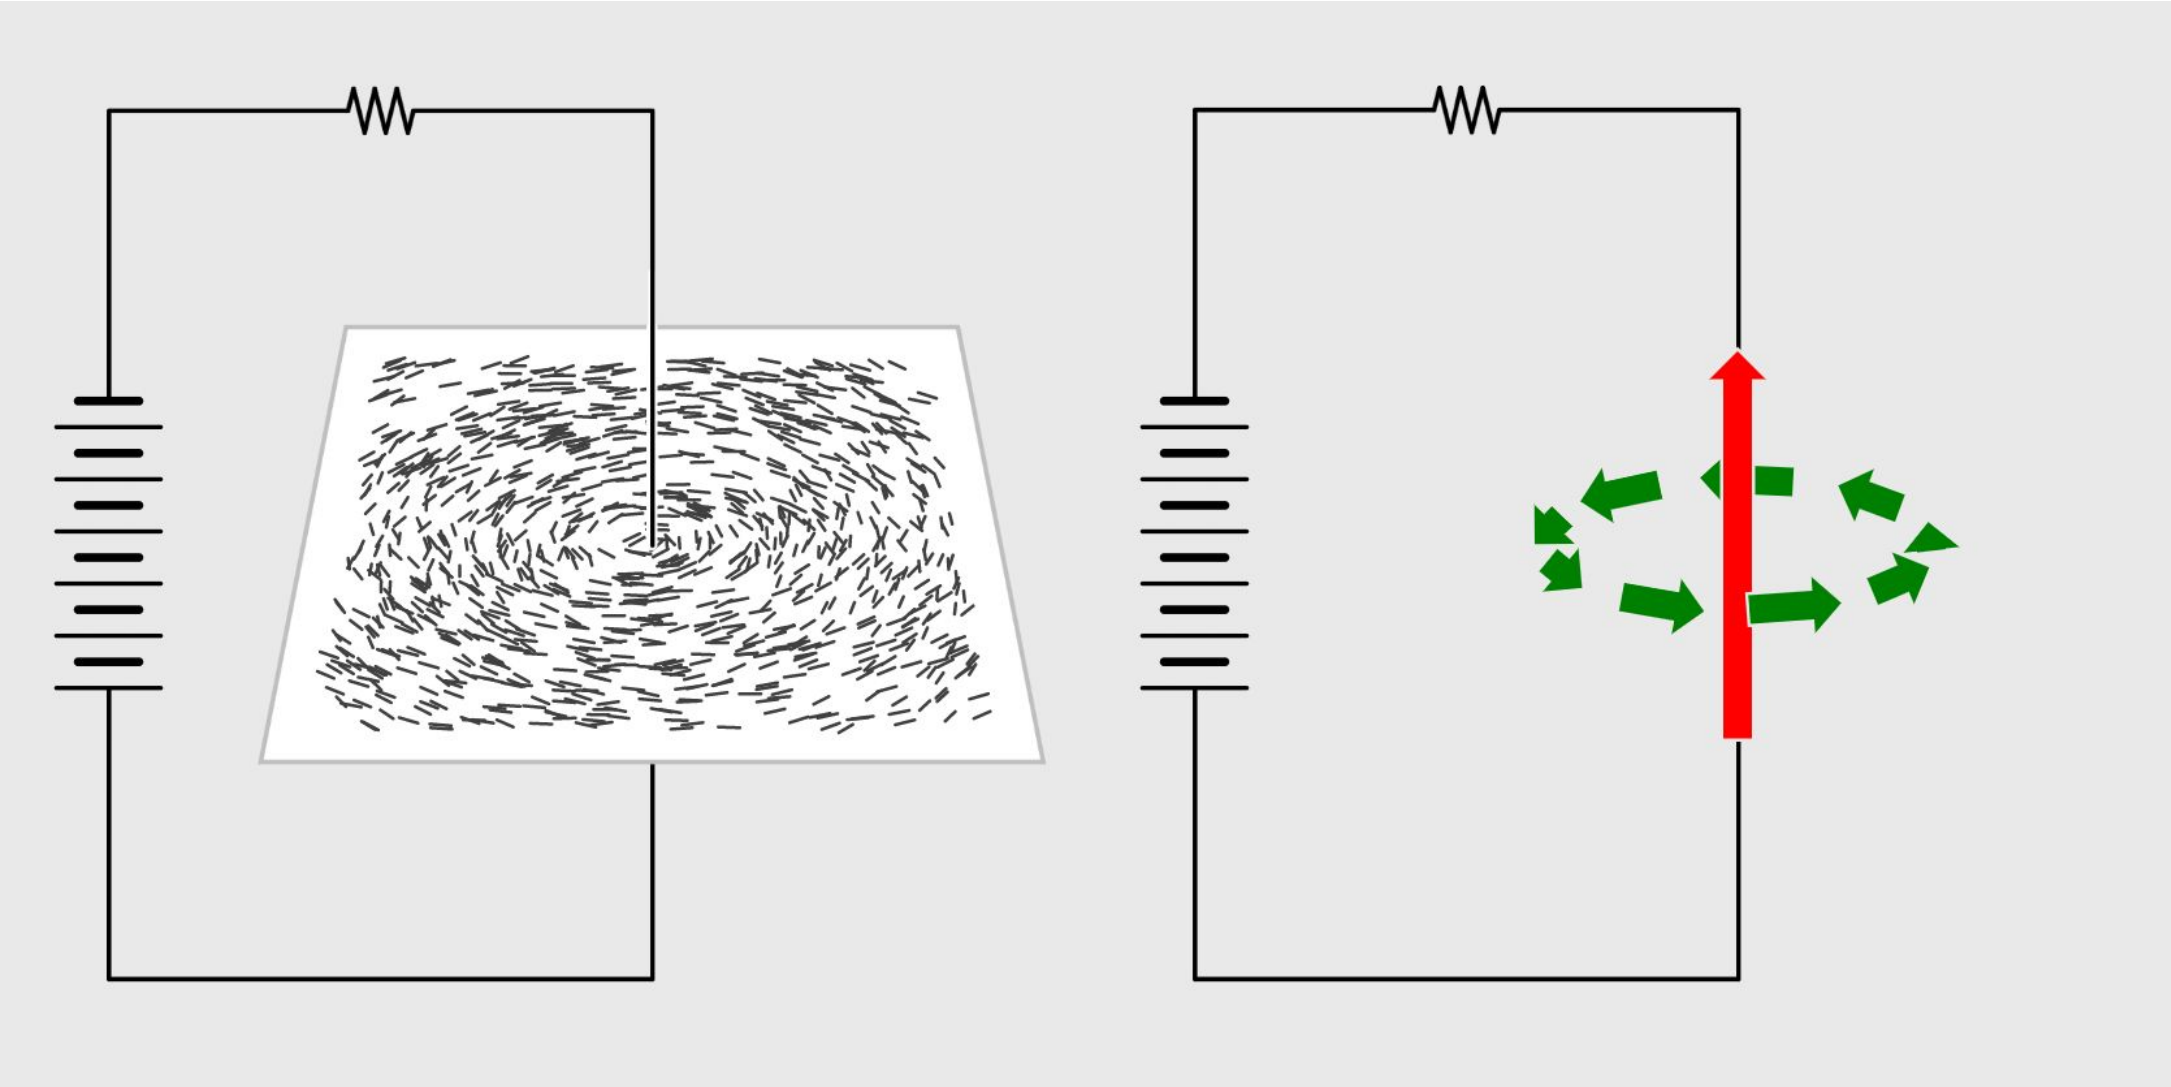

Finish

Aturan Tangan Kanan Medan magnet di sekitar kawat/kabel yang melingkar dan berarus listrik

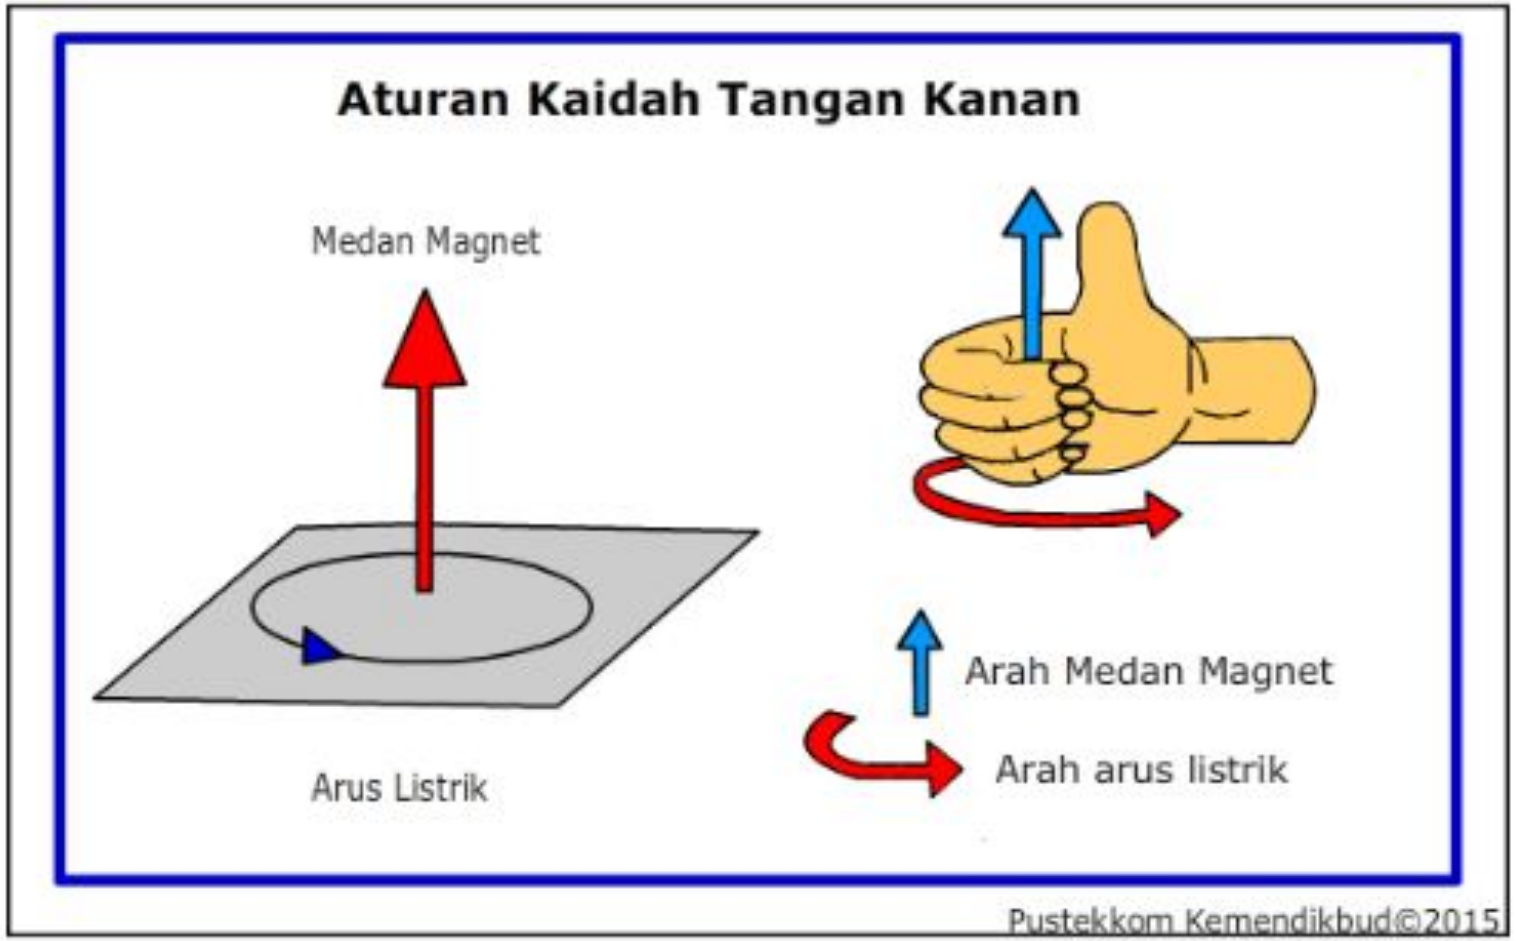

Kawat (kabel) melingkar (Koil & Solenoid) □ Arah medan magnet?

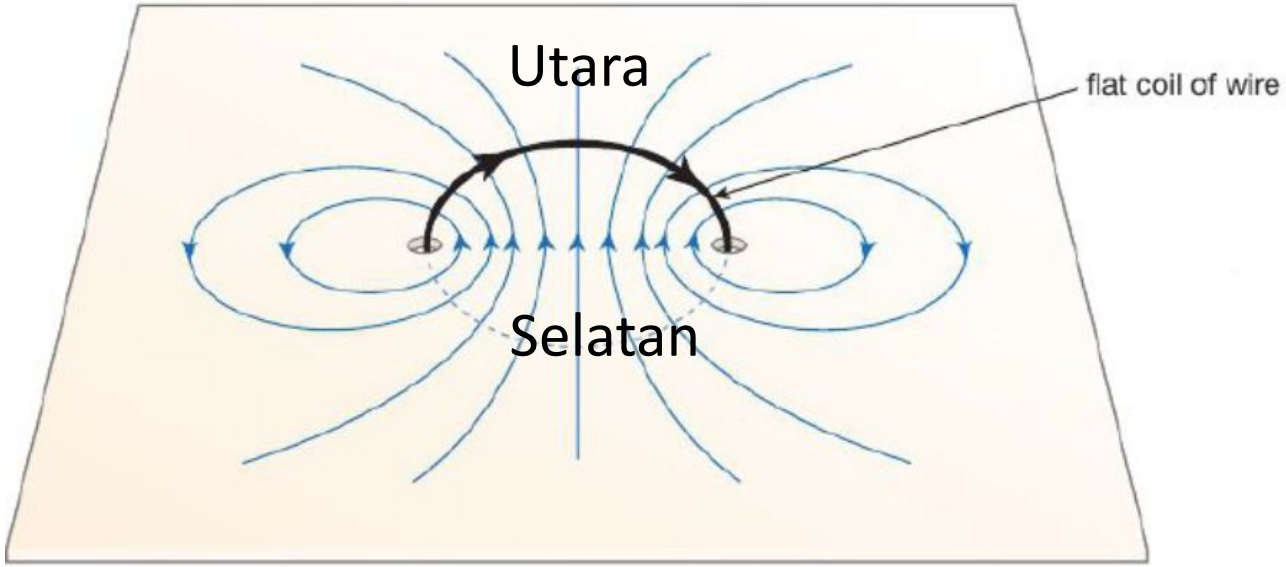

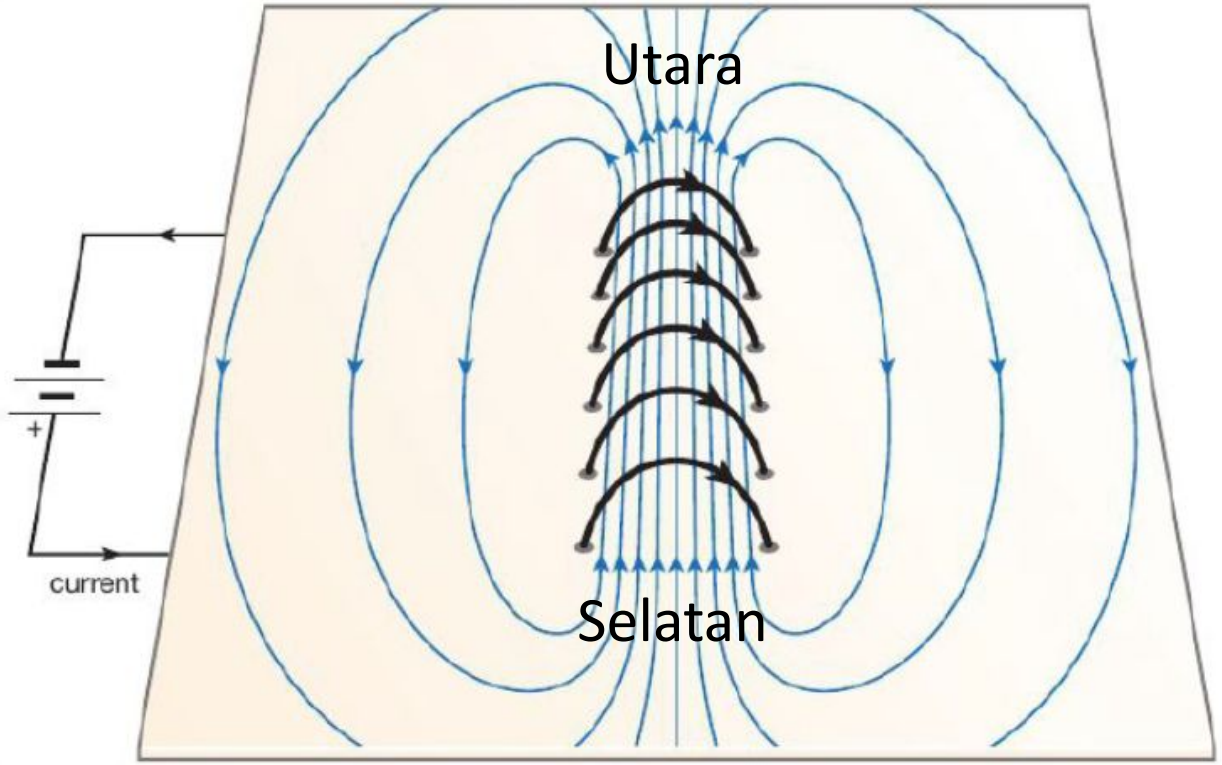

Gaya Lorentz Aturan Tangan Kiri

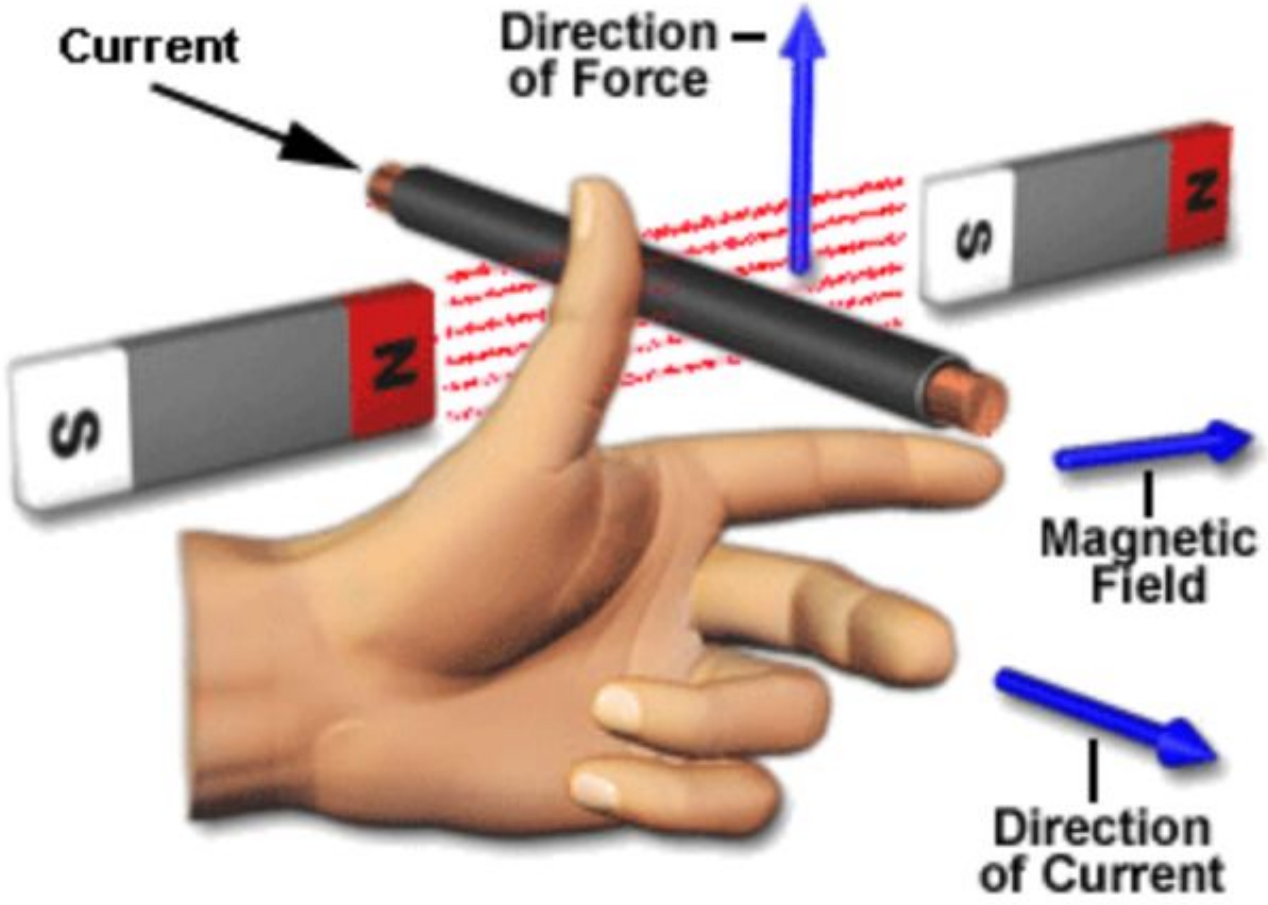

Gaya Lorentz Motor DC

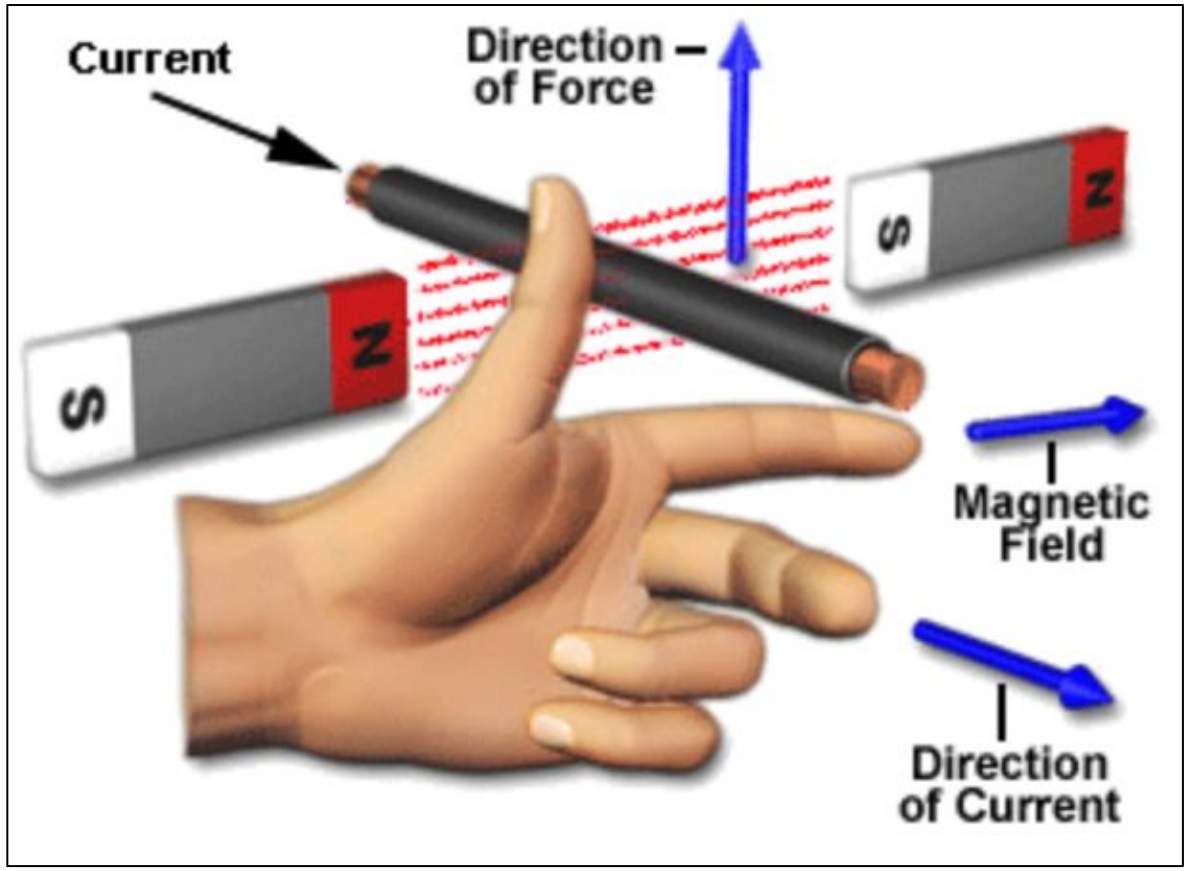

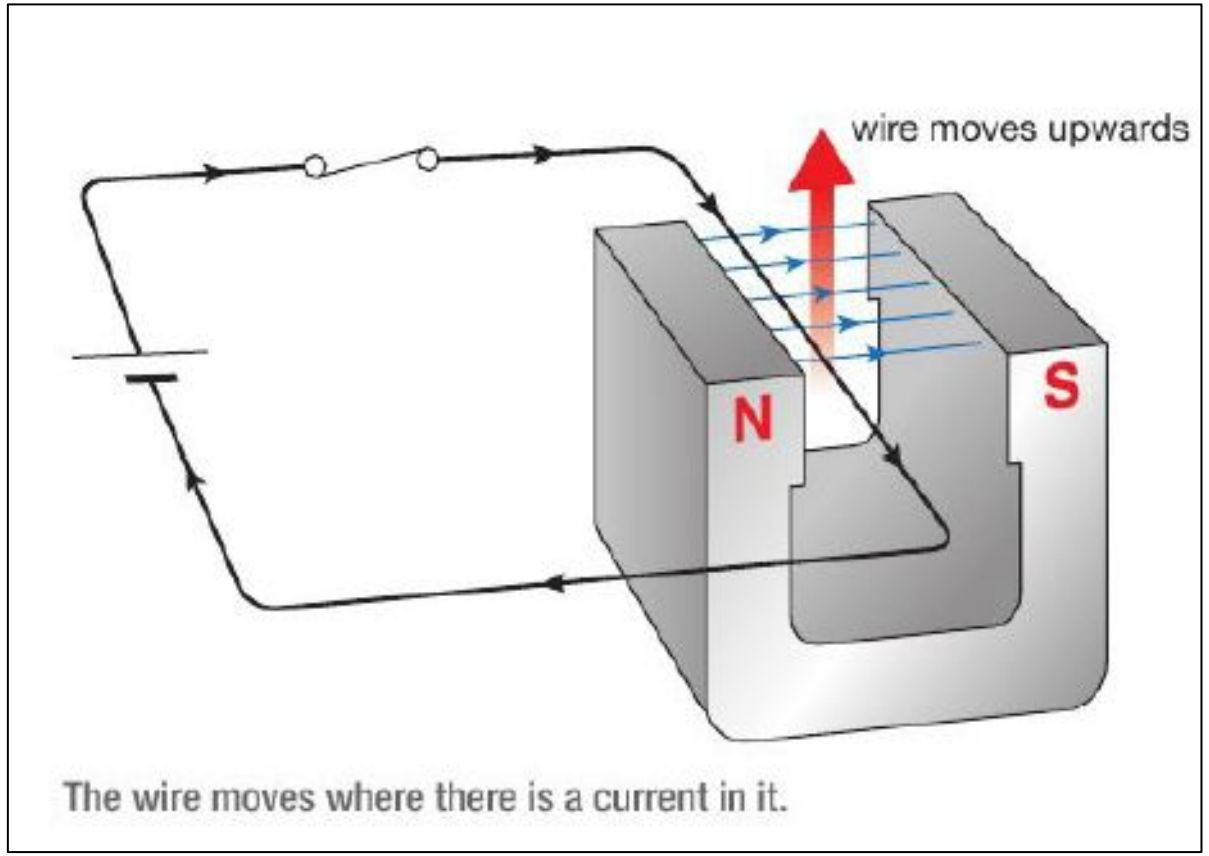

Gaya Lorentz Bisa juga memakai Tangan Kanan Motor DC

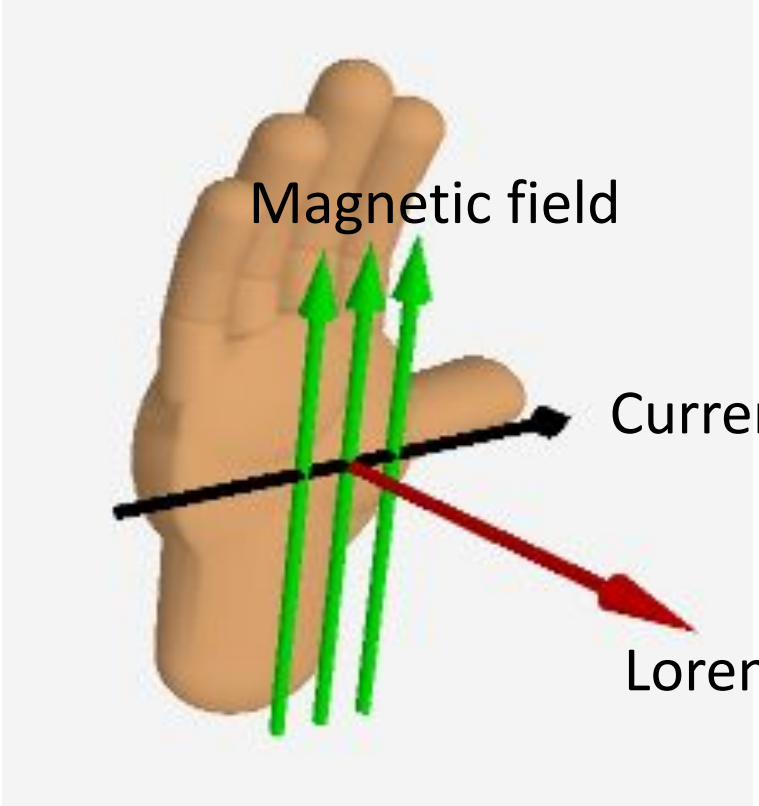

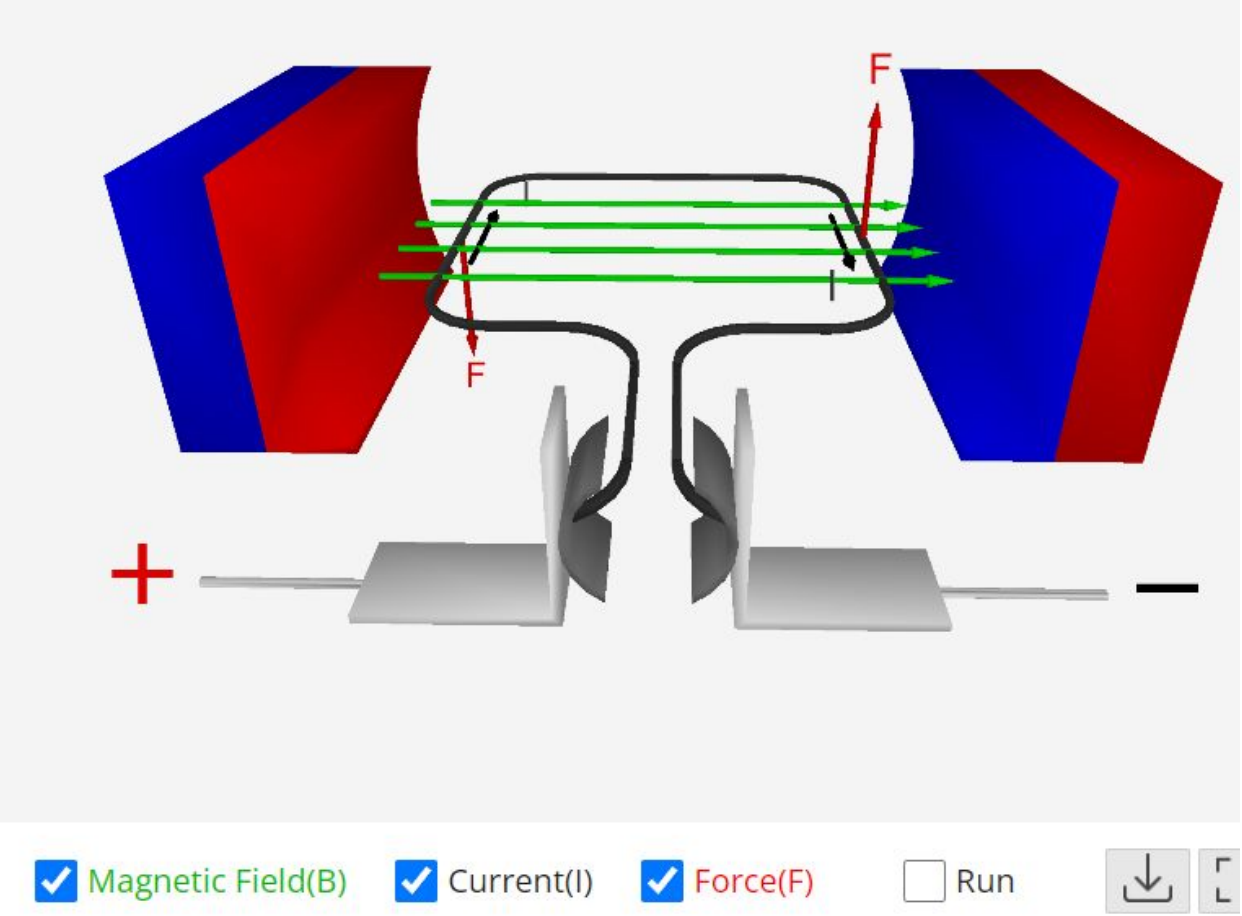

Gaya Gerak Listrik (GGL) □ Dinamo

Agenda pertemuan selanjutnya?