

GENERAL**Operational Hours**

ATS Hours: HX; PPR PN 24HR or last working day before 1600±.

ADMIN Hours: Not published

Airport Information

RFF: CAT 2 or 4 for SKED flights, other flights CAT 1;
CAT 2 or 4 O/R PPR

Fuel: 0700-1600±

PCN: RWY 06/24: 29/F/A/W/U

Customs: PN 24HR

Operation**Traffic Note**

PCL AVBL O/R.

Absence ATS: Obtain Rennes QNH from Rennes ATIS 136.400.

TWY Restriction

TWY A and C width 10.5m / 34ft.

Warnings

Wildlife strike hazard.

ARRIVAL**Speed**

MAX IAS 250KT below FL100.

DEPARTURE**Take-off Minima**

RWY		06/24	
A, B, C	ft - m/km	0 - 400V	HJ only
		0 - 550V	wo ATS, HJ only
		0 - 800V	HN
D		Not applicable	-

Speed

MAX IAS 250KT below FL100.

De-Icing

O/R from 15 NOV to 15 APR.

09-AUG-2018
SBK-LFRT

France St Brieuc Armor

AGC
AFC


AFC

AFC

Armor St Brieuc France


AGC
AFC

2-10

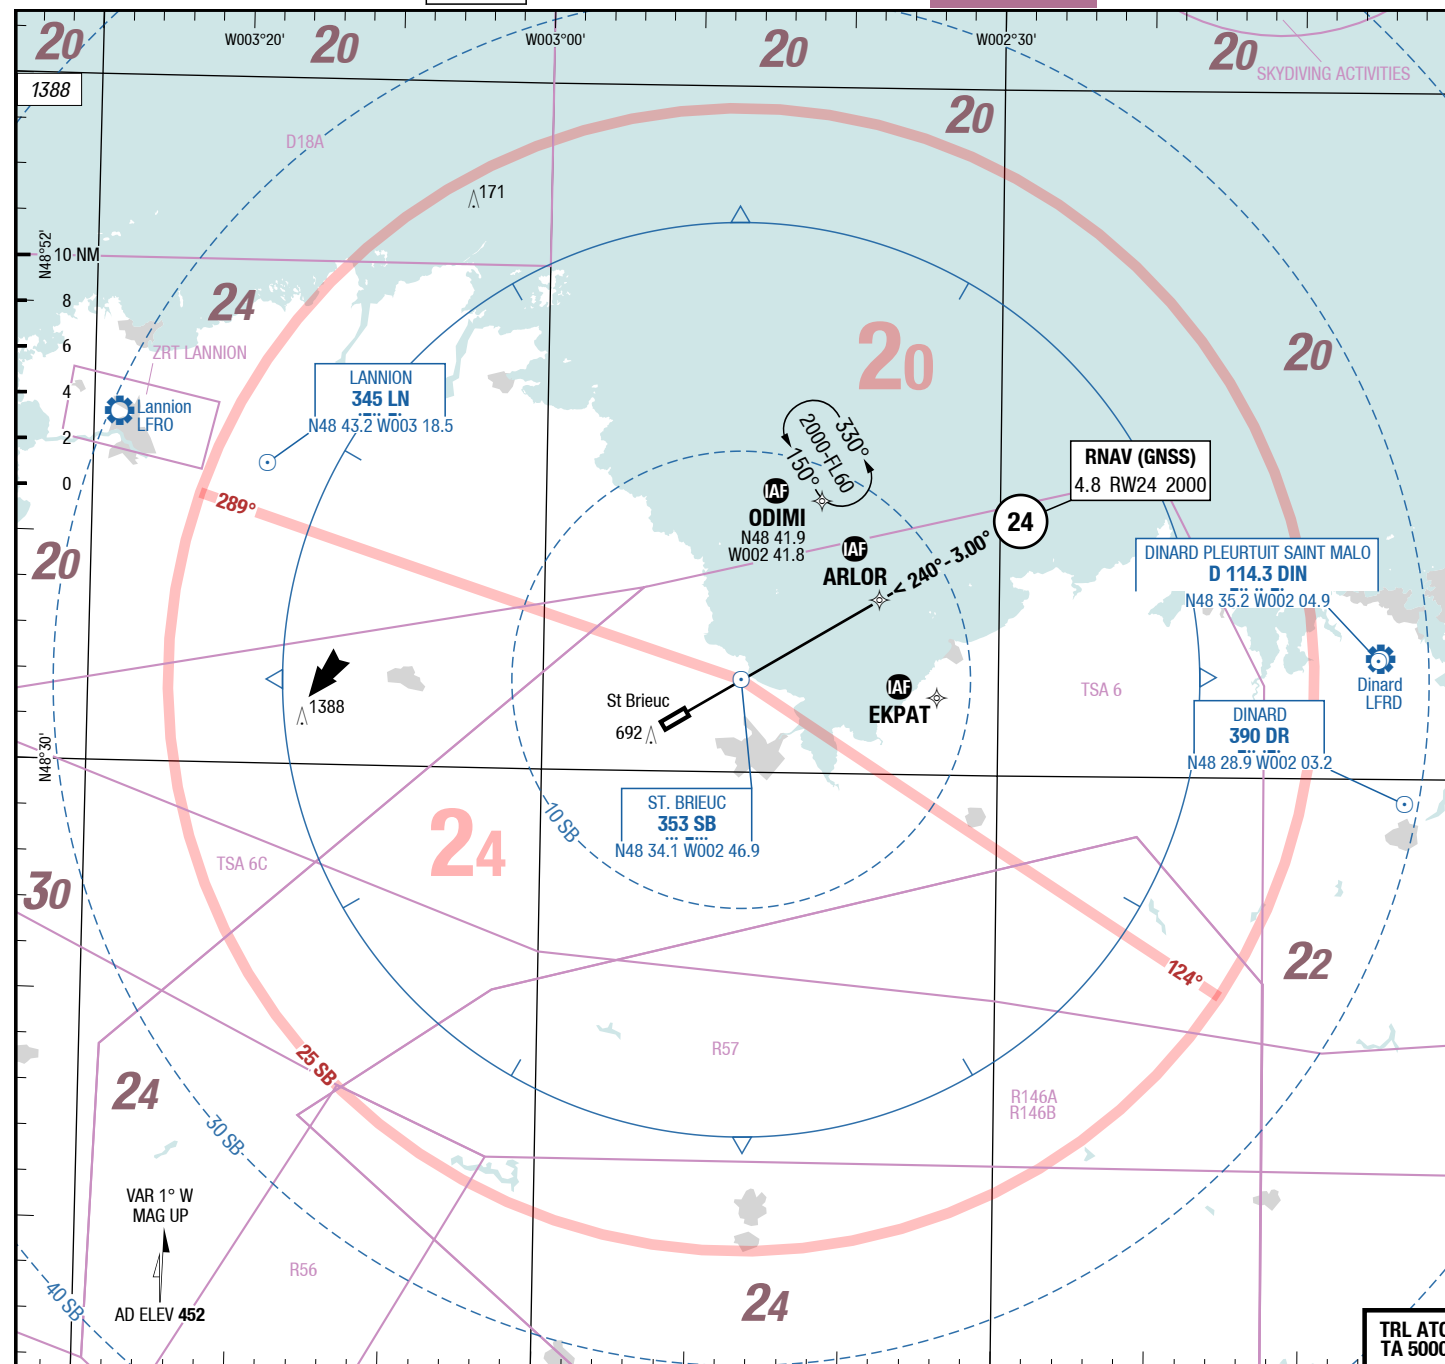

Rennes ATIS 136.400
Info 118.450

Landing RWY system:

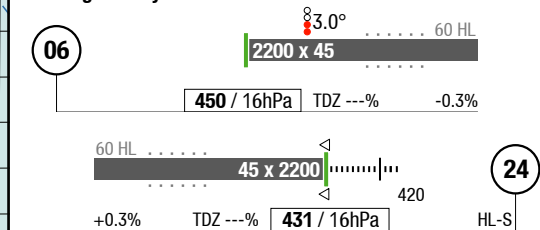

Changes: Nil

09-AUG-2018
SBK-LFRT

France **St Brieuc** Armor

AGC

AGC

AGC

Armor **St Brieuc** France

AGC

3-20

Rennes ATIS 136.400
Info 118.450

W002°52'

W002°51'

N48°32.5'

N48°32'

VAR 1° W
MAG UP

AD ELEV 452

06

060°
450

ARP
N 48 32.3
W 002 51.4

2200 x 45

A

C

B

APRON

APRON

HANGAR

512


TERMINAL

APRON

HANGARS

24

240°
431



Changes: TWY restriction

DEPARTURES

	GS	120	150	180	210	240	270
4.0%	ft/MIN	500	700	800	900	1000	1100

RWY

Routing

OMNIDIRECTIONAL DEP

RWY 06

060° to **1400** - then direct route up to enroute safety altitude.



RWY 24

4% to **1400**240° to **1400** - then direct route up to enroute safety altitude.

SBK-LFRT

7-10

RNAV (GNSS) 24

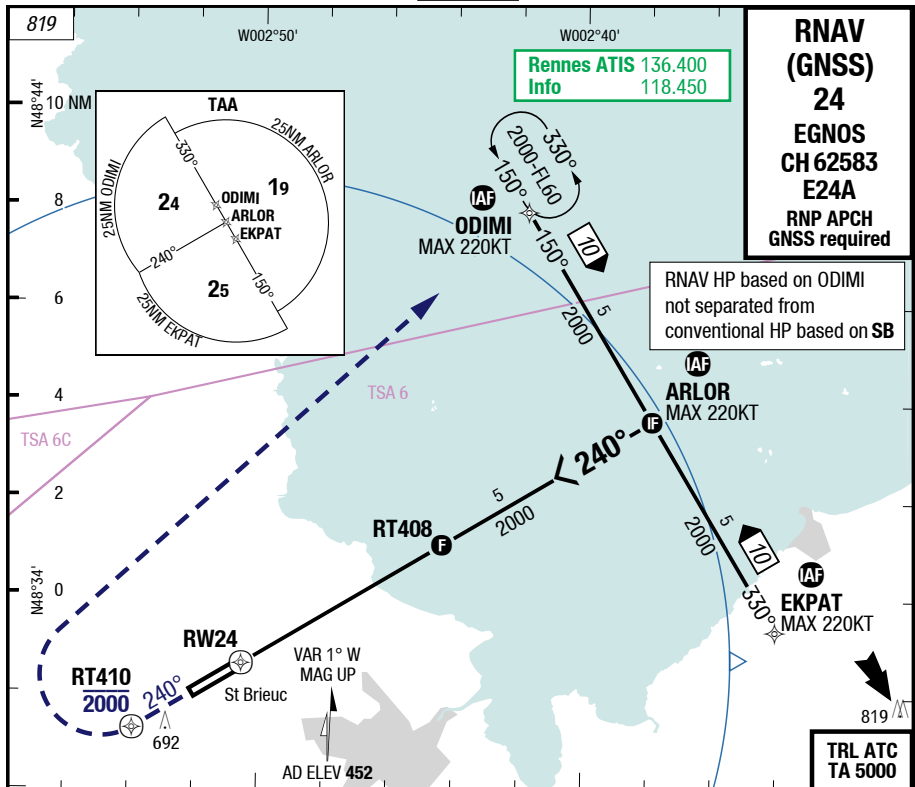


24

2	3	4	4.8			3.00°
1120	1440	1760	2000			RW24



240°
at RT410 (MAX 2000)
RT direct ODIMI
climb 2000
climb 1500 prior
to level acceleration

GS	120	140	160
RT408	640	740	850
-MAPt	2:23	2:03	1:47

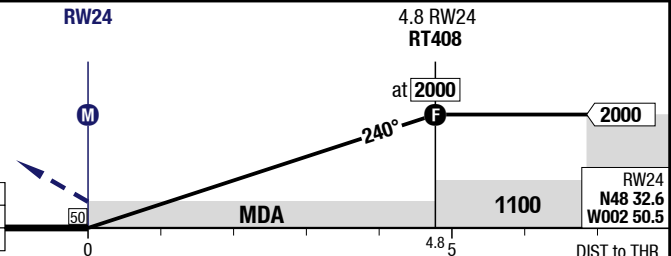


24	RNAV GNSS LPV GA 3.0%	RNAV GNSS LPV GA 2.5%	RNAV GNSS LNAV	Circling N of RWY only	Circling wo ATS N of RWY only 1)
C	ft - m/km ft 200 - 750 640 2)	230 - 800 660 2)	380 - 1.3 810	800 - 2.4V 1250	1040 - 2.4V 1490
D	ft - m/km ft Not published	Not published	Not published	Not published	Not published

1) HJ only
2) With EVS 550m

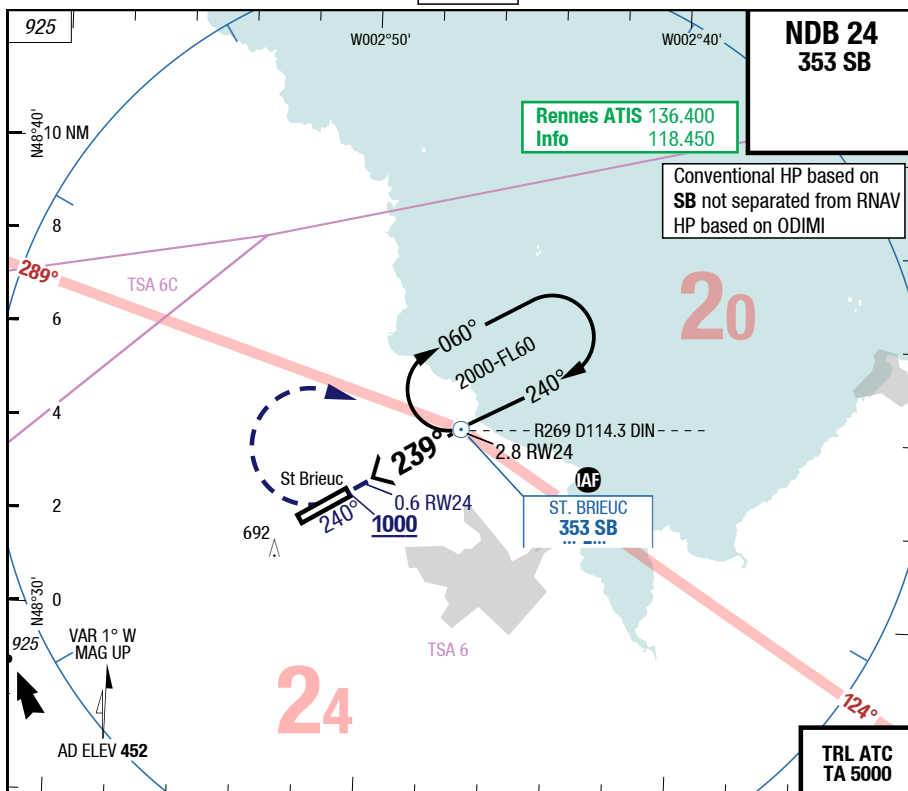

2	3	4	4.8			3.00° RW24
1120	1440	1760	2000			239° RWY 240°

QDR 240 **SB**
at MNM **1000 RT**
(do not turn before MAPt)
direct **SB**
climb **2000**
(climb **1600**
prior to level acceleration)

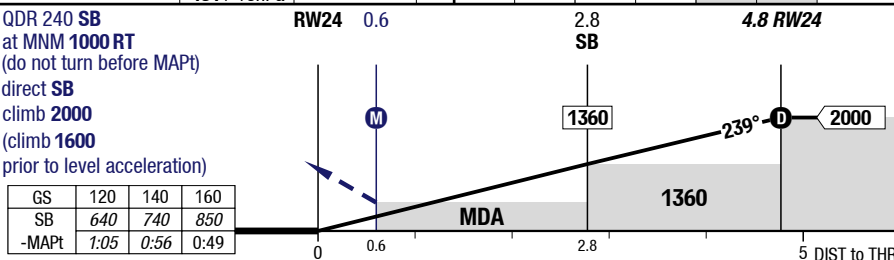

24		NDB				Circling N of RWY only	Circling w/ ATS N of RWY only ¹⁾
C	ft - m/km ft	410 - 1.5 840				800 - 2.4V 1250	1040 - 2.4V 1490
D	ft - m/km ft	Not published				Not published	Not published

1) HJ only