

GENERAL**Operational Hours****ATS Hours:** 1000-0100**Airport Information****RFF:** CAT 5**PCN:** RWY 03/21: 53/F/C/X/T**Operation****TWY Restrictions**

TWY C width 9m / 30ft and MAX weight 13.5t / 23762lbs.

Taxi/Parking

Taxi into/out of stands under own PWR at reduced speed with marshalling assistance.

Engine Run-up

Engine tests not allowed BTN 0100-1100.

Warnings

Birds in vicinity of AD.

ARRIVAL**Speed**

MAX IAS 250KT below FL100 within airspace classes B, C, D and G.


Communication**COM Failure:** See CRAR.**DEPARTURE****Take-off Minima**

RWY		03/21		
Multi ENG	ft - m/km	0 - 550V	HJ only	For conditions check CRAR
		0 - 800V	HN	

Speed


MAX IAS 250KT below FL100 within airspace classes B, C, D and G.


Communication**COM Failure:** See CRAR.**Departure Procedure****Noise Abatement Procedure:** Use TKOF PROC B.

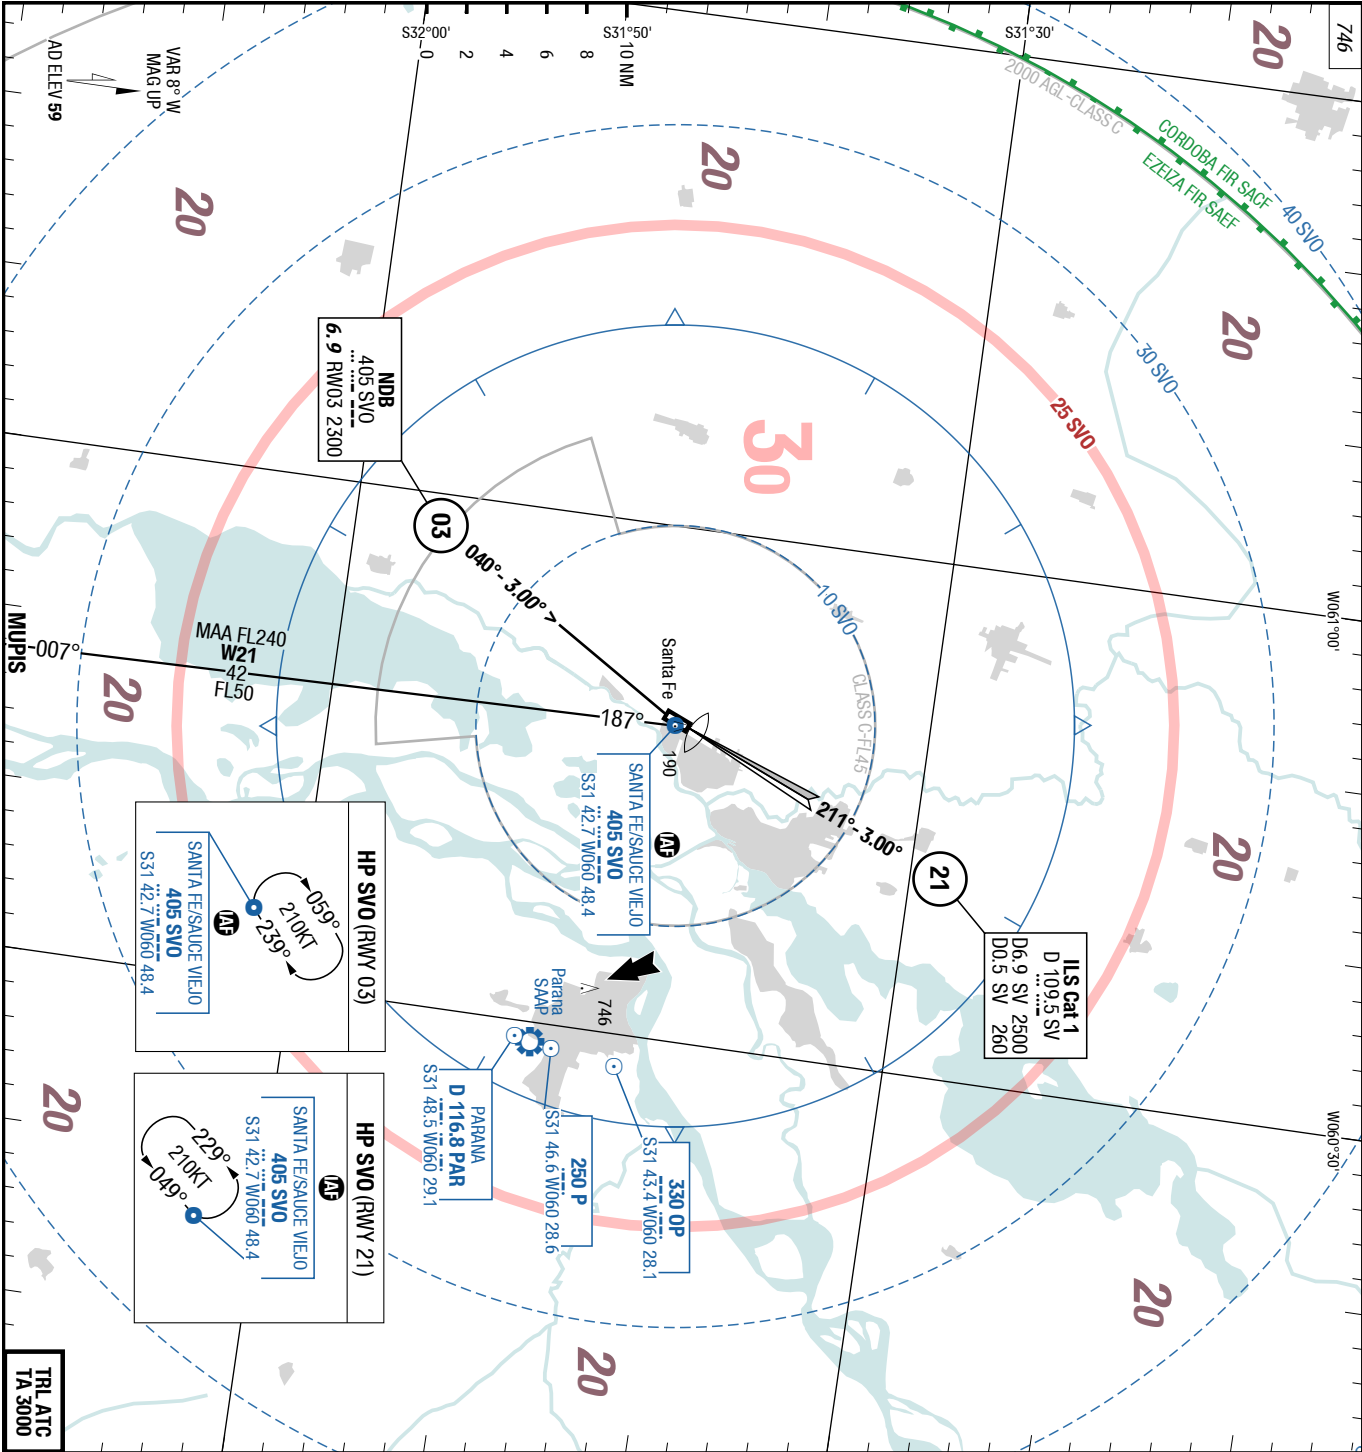

Panama CTL	119,600
Sauce Viejo APP	118,500
Sauce Viejo TWIR	118,950
Sauce Viejo GND	118,450
	118,950
	120,100
	118,950
	118,450

Landing RWY system:



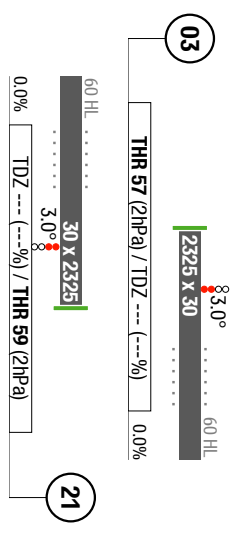


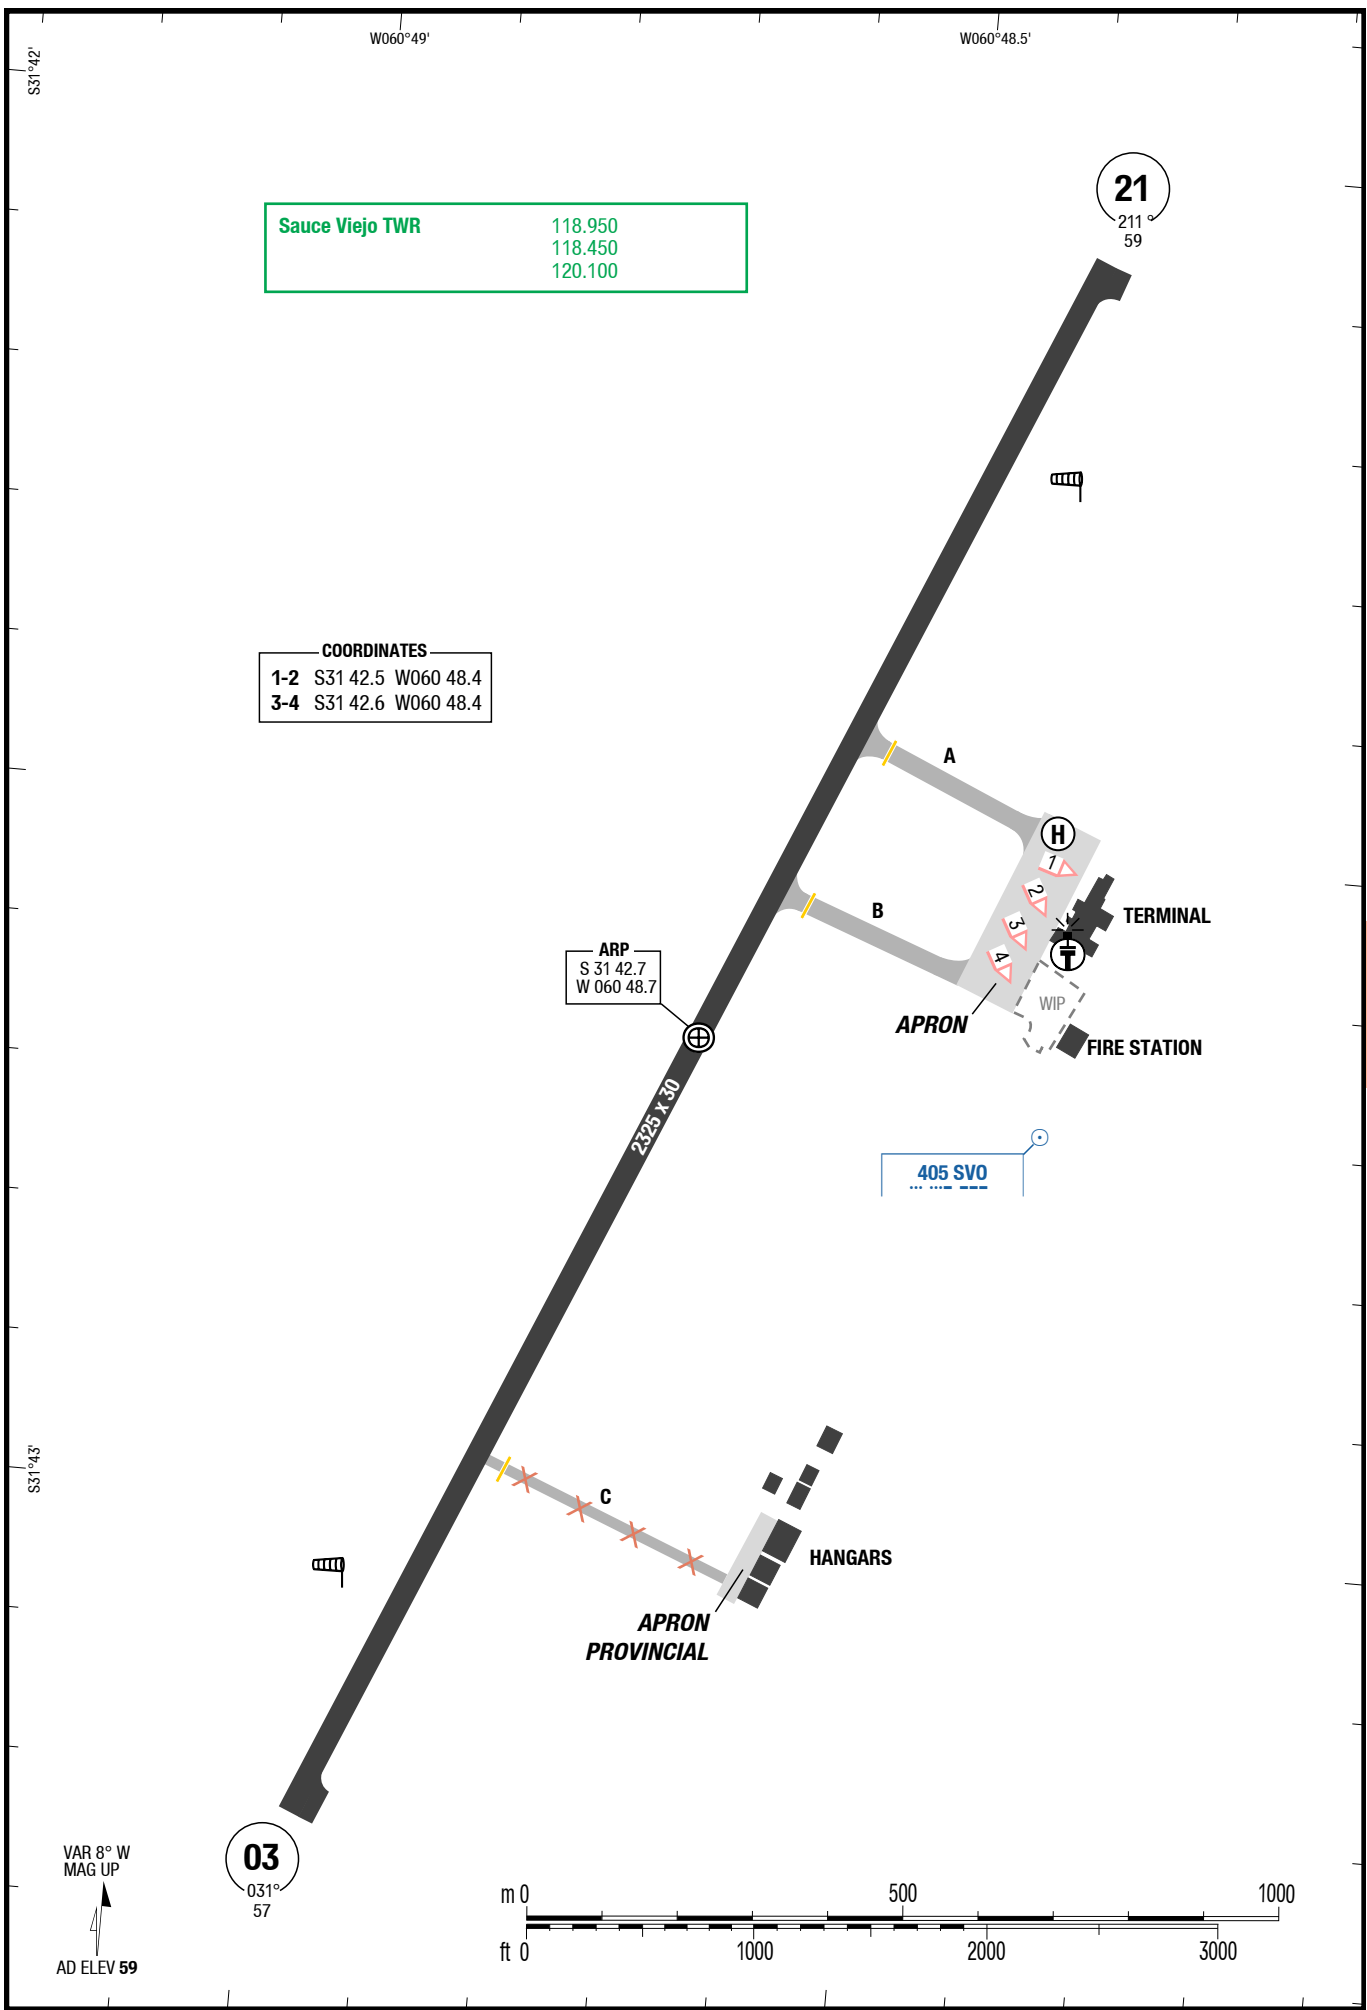

Changes: Helipad, WIP, VAR, QFU, BLDG


7-10

ILS 21

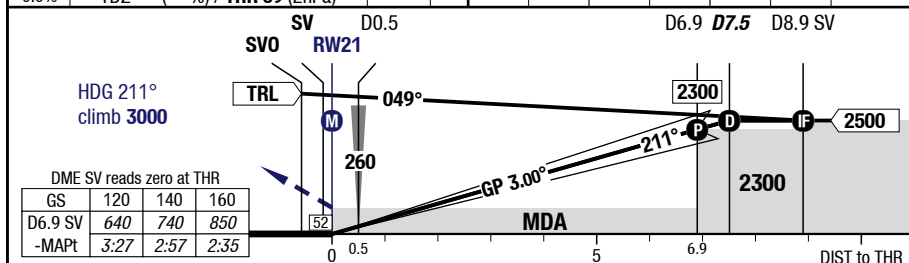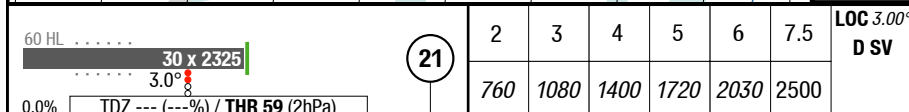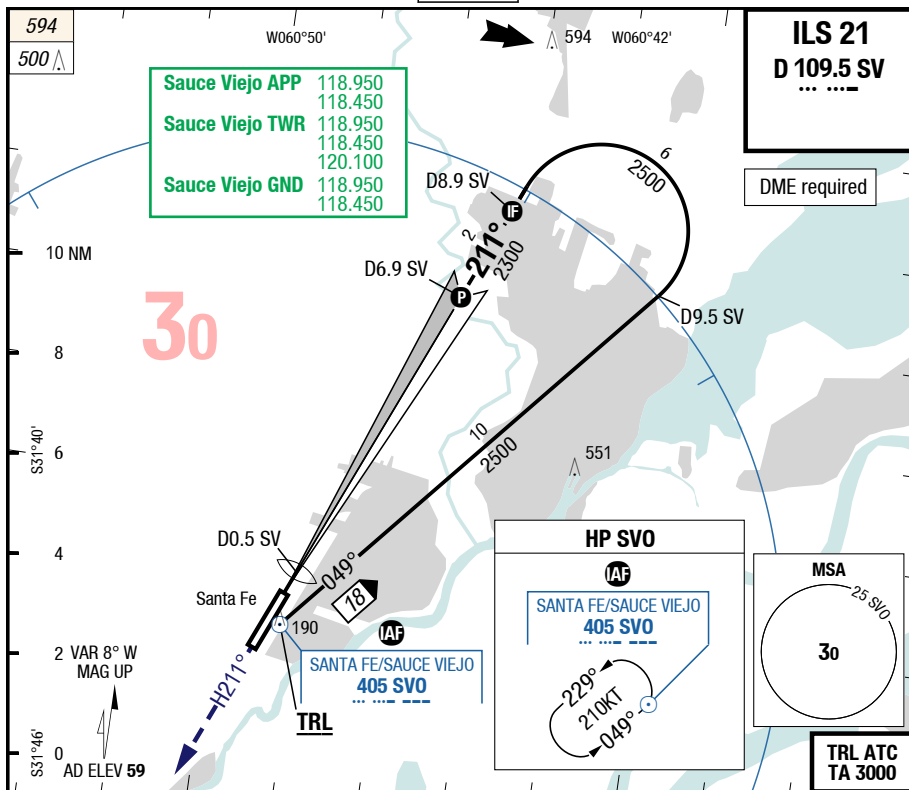

21	Cat 1 DME ¹⁾	LOC DME			Circling
C	ft - m/km ft	200 - 1.2V 260	570 - 3.0V 620		830 - 3.7V 880
D	ft - m/km ft	200 - 1.2V 260	570 - 3.0V 620		830 - 4.6V 880


1) With EVS VIS 800m

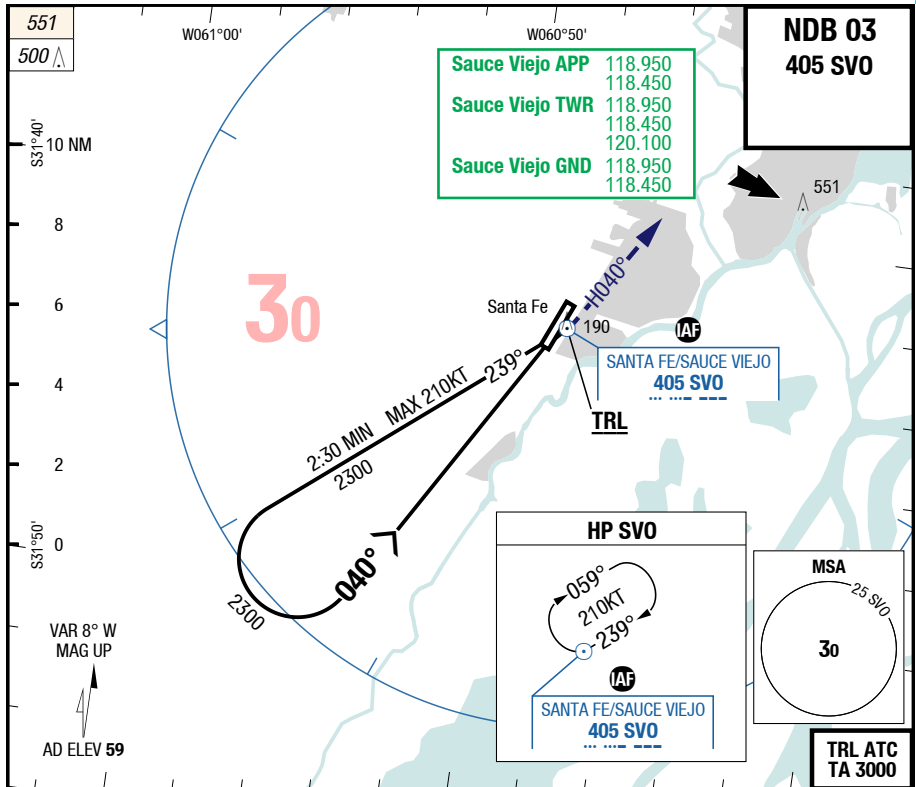


3.00° RW03 040° RWY 031°	6.9	6	5	4	3	2	03	83.0° 2325 x 30 60 HL	THR 57 (2hPa) / TDZ --- (%) 0.0%
6.9 RW03	RW03						SVO	HDG 040° climb 3000	
2300	2300	2:30 MIN MAX 210KT						TRL	
2300	040°	MDA						M	
DIST to THR	6.9	5	0						
03	NDB							Circling	
C	ft - m/km ft	520 - 2.8V 570						830 - 3.7V 880	
D	ft - m/km ft	520 - 2.8V 570						830 - 4.6V 880	

7-30

NDB 21

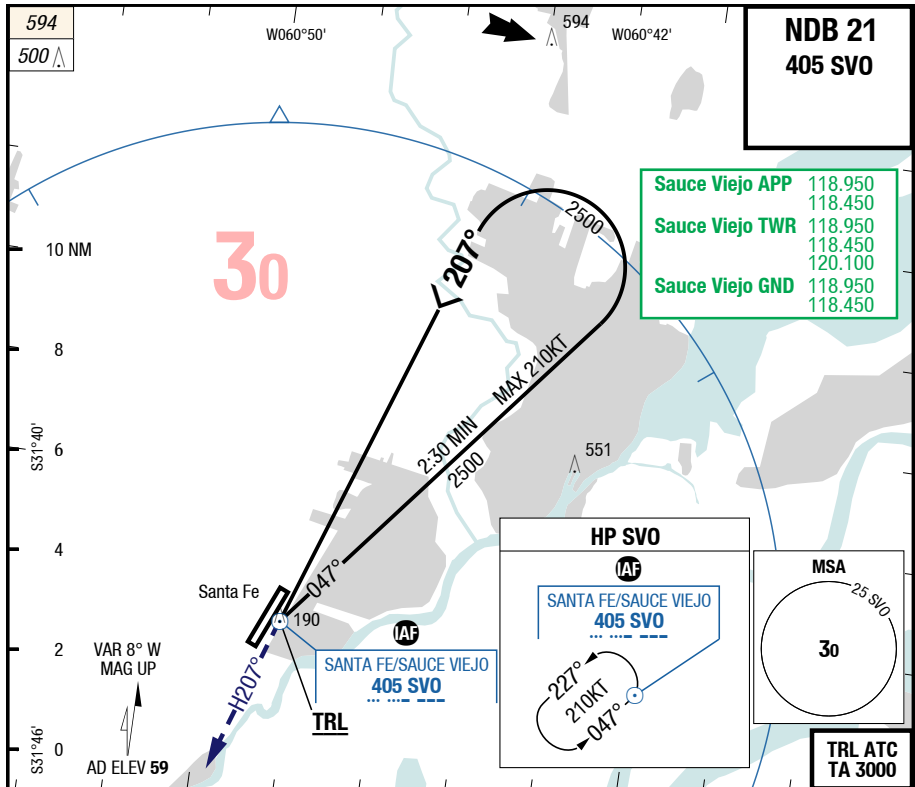

60 HL	30 x 2325	21	4	5	6	7	7.5	3.00°
0.0%	TDZ --- (---%) / THR 59 (2hPa)		1390	1710	2020	2340	2500	RW21
								207°
								RWY 211°

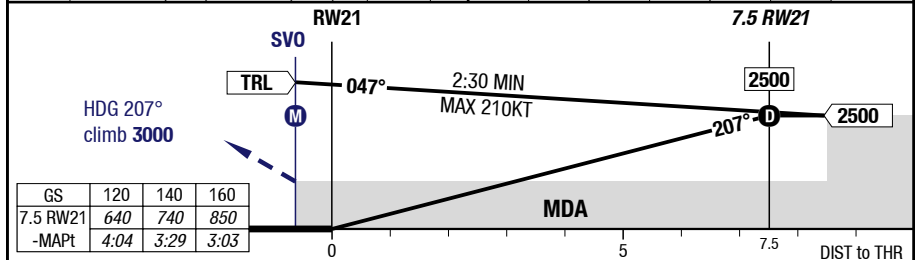

21	NDB						Circling
C	ft - m/km ft	1030 - 5.0V 1080					1030 - 5.0V 1080
D	ft - m/km ft	1030 - 5.0V 1080					1030 - 5.0V 1080