

**GENERAL****ATS Hours**

H24, attended MON-FRI 1400-2300±, except HOL.

**Airport Information**

**RFF:** O/R  
**Fuel:** Jet A  
**PCN:** O/R

**Operation****Traffic Note**

RWY and APCH lights are turned off when TWR CLSD, thereafter activation by CTAF.

**Warnings**

Edge lights located 26m / 85ft from RWY edge. Depth perception problems may exist during darkness.

**ARRIVAL****Speed**

MAX IAS 250KT below 10000ft.

**Communication****COM Failure:** See CRAR United States.**DEPARTURE****Take-off Minima**

RWY		18/36	
1+2 ENG	ft - ft/SM	0 - 1.0V	-
3+4 ENG		0 - 0.5V	-

**Speed**

MAX IAS 250KT below 10000ft.

**Communication****COM Failure:** See CRAR United States.

Arkansas Int'l **Blytheville** United States

# ВУН-КВУН

**AGC**  
**AFC**

**AFC**

## AFC

**AGC**  
**AFC**



134.650

122.700 ARCAL

122.700

**Landing RWY system:**

18


3536 x 46

60 HL  
.....

THR 250 (9hPa) / TDZ --- (---%)	0.0%
---------------------------------	------

60 HL  
46 x 3536

0.0%	TDZ 254 (---%) / THR 252 (9hPa)	HL-S
------	---------------------------------	------

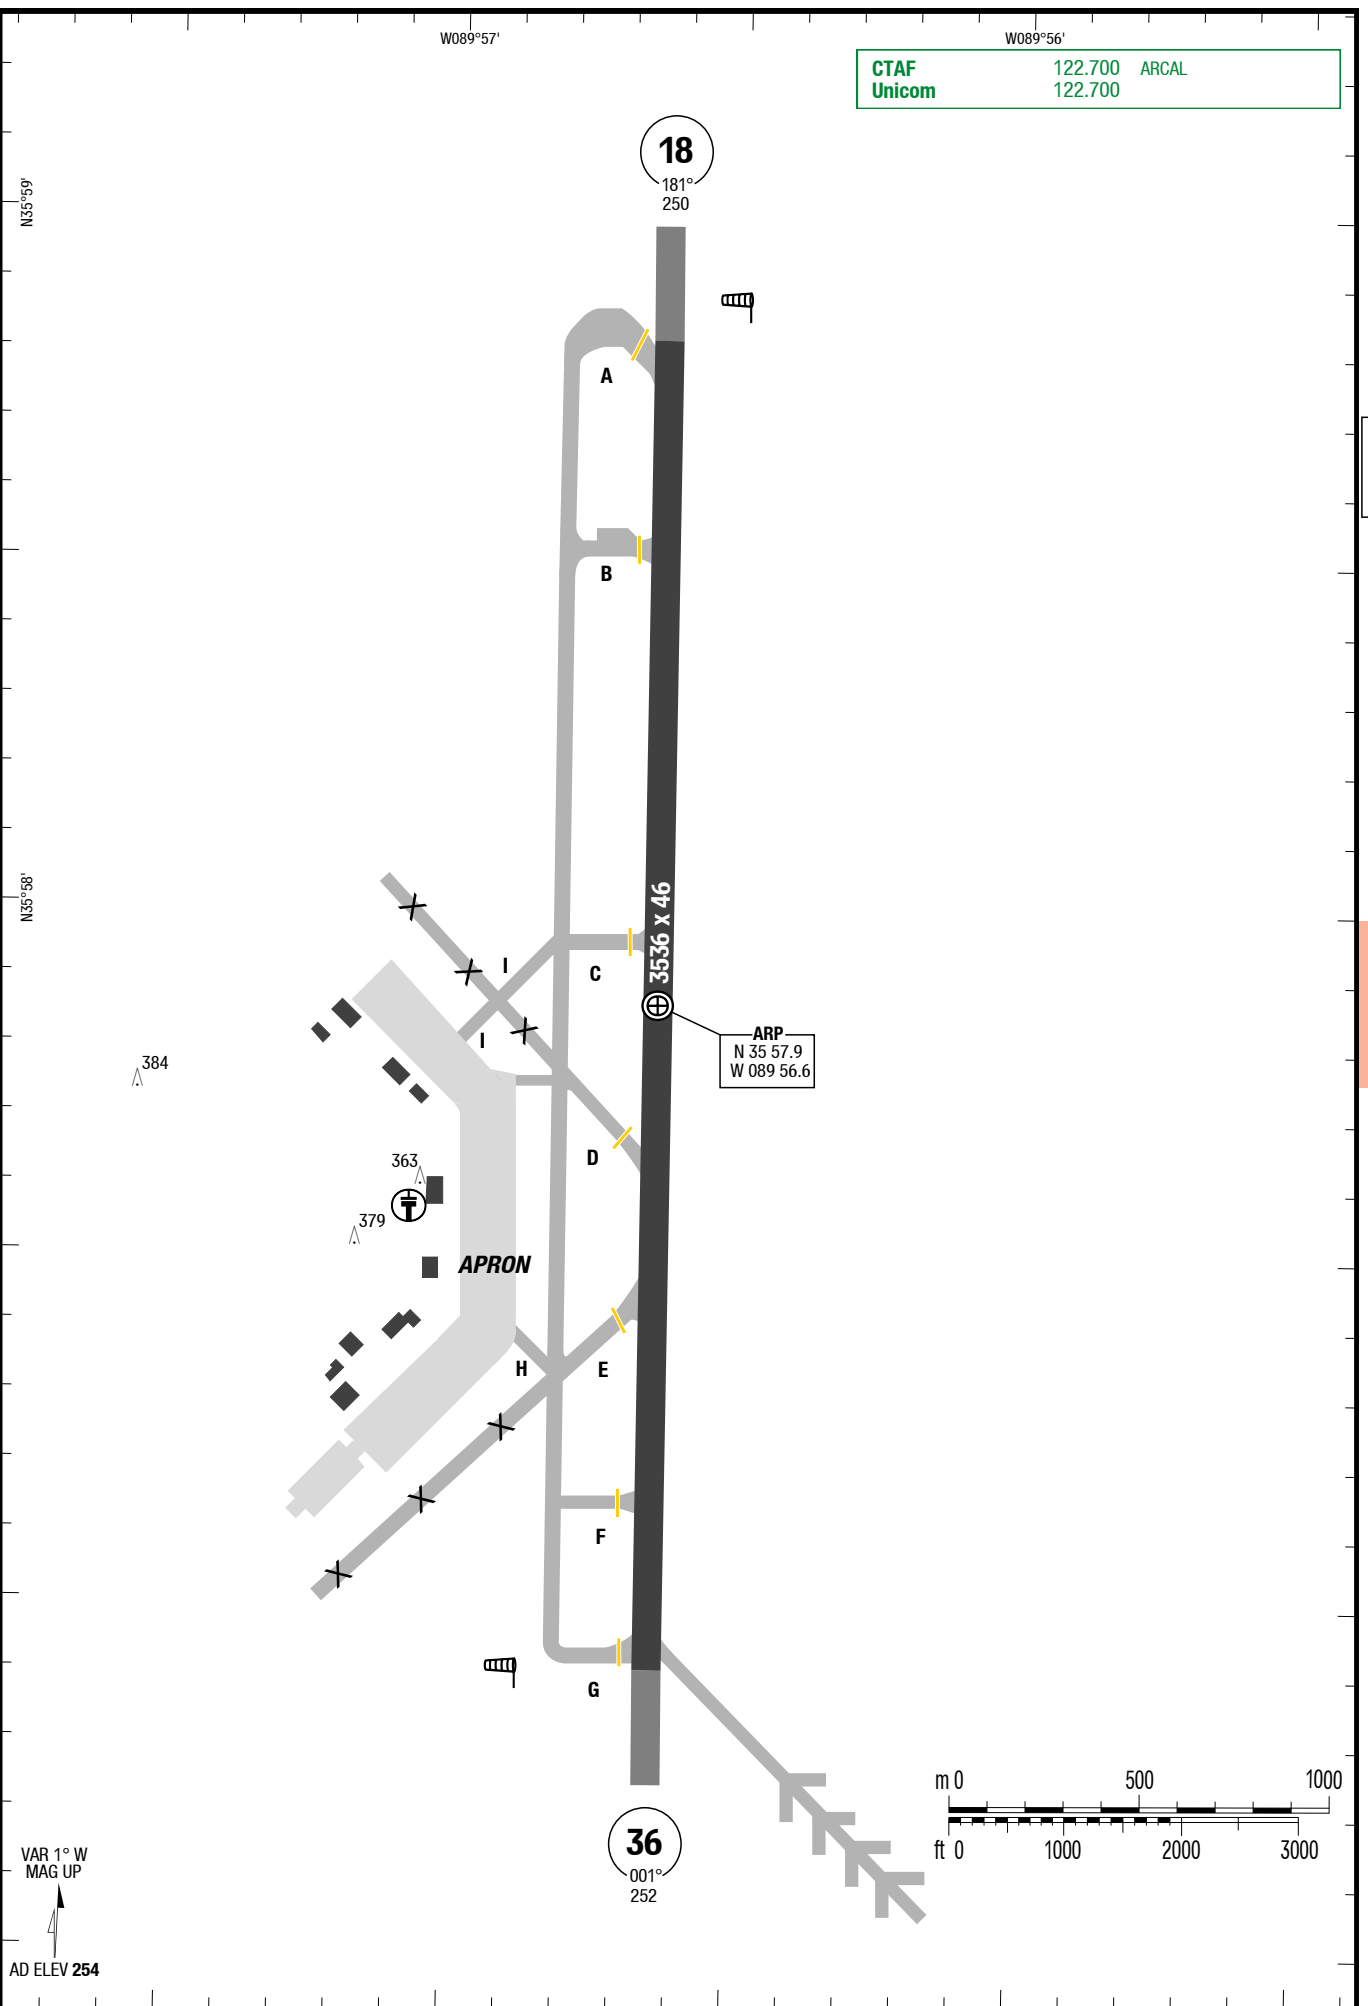

BYH-KBYH

5-10

Obstacle Departure

SIDPT


## Obstacle Departure

RWY	Notes
36	Tree 3301ft from DER, 1187ft left of centerline, 88ft AGL/337ft MSL.


BYH-KBYH

7-10

ILS or LOC 18

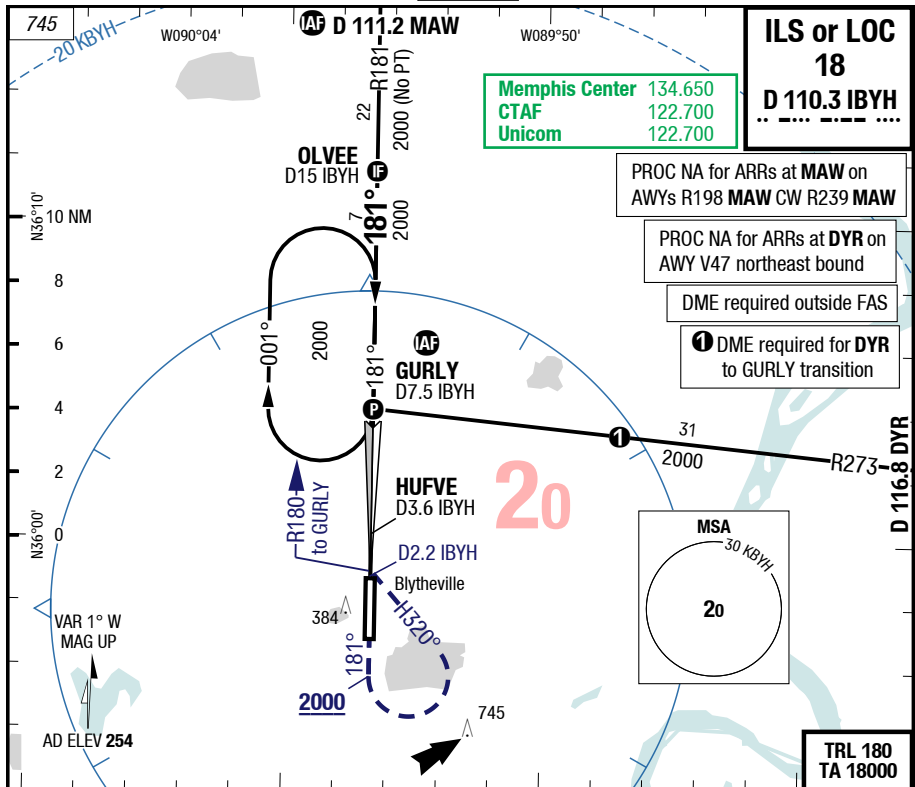

LOC 3.01° D IBYH	7.5	7	6	5	4	18	3536 x 46	60 HL
	2000	1840	1520	1200	880			
THR 250 (9hPa) / TDZ --- (---%) 0.0%								

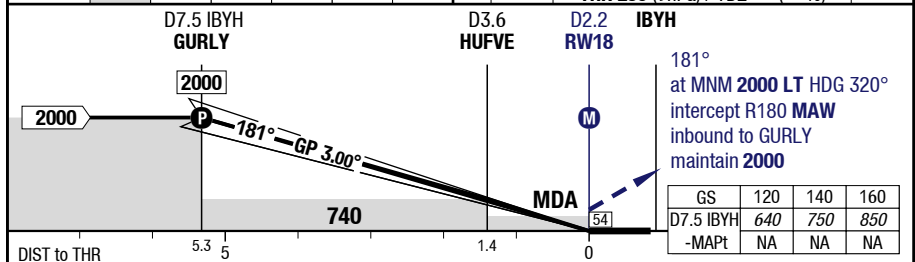


18	Cat 1	LOC DME				Circling 1) TERPS
C	ft - ft/SM ft	200 - 0.75V 450	350 - 1.0V 600			600 - 1.5V 860
D	ft - ft/SM ft	200 - 0.75V 450	350 - 1.0V 600			700 - 2.25V 960

1) W of RWY only


BYH-KBYH

7-30

RNAV (GPS) 18

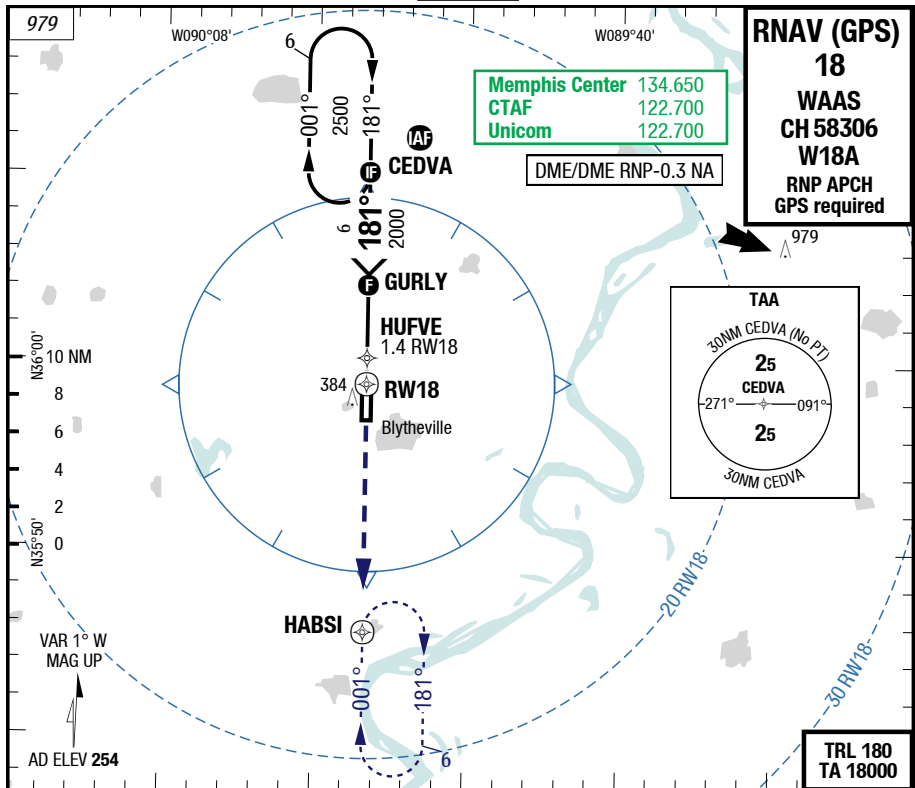

3.00° RW18	6.9	5	4	3	2	18	3536 x 46	60 HL
	2500	1900	1580	1260	940			
THR 250 (9hPa) / TDZ --- (---%) 0.0%								

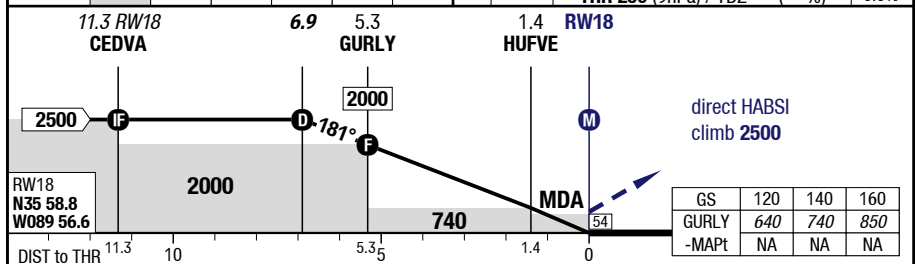


TERPS	18	RNAV GPS LPV	RNAV GPS LPV HKA QNH 1)	RNAV GPS VNAV 2) 3)	RNAV GPS VNAV HKA QNH 1) 2) 4)	RNAV GPS LNAV	Circling 5)
C	ft - ft/SM ft	200 - 0.75V 450	220 - 0.75V 470	300 - 1.0V 550	310 - 1.13V 560	370 - 1.0V 620	600 - 1.5V 860
D	ft - ft/SM ft	200 - 0.75V 450	220 - 0.75V 470	300 - 1.0V 550	310 - 1.13V 560	370 - 1.0V 620	700 - 2.25V 960

1) Use with Blytheville Muni (KHKA) QNH 2) Inop table does not apply 3) Uncompensated BARO VNAV NA below -15°C (5°F) or above 54°C (130°F) 4) Baro VNAV NA 5) W of RWY only

BYH-KBYH

7-40

RNAV (GPS) 36

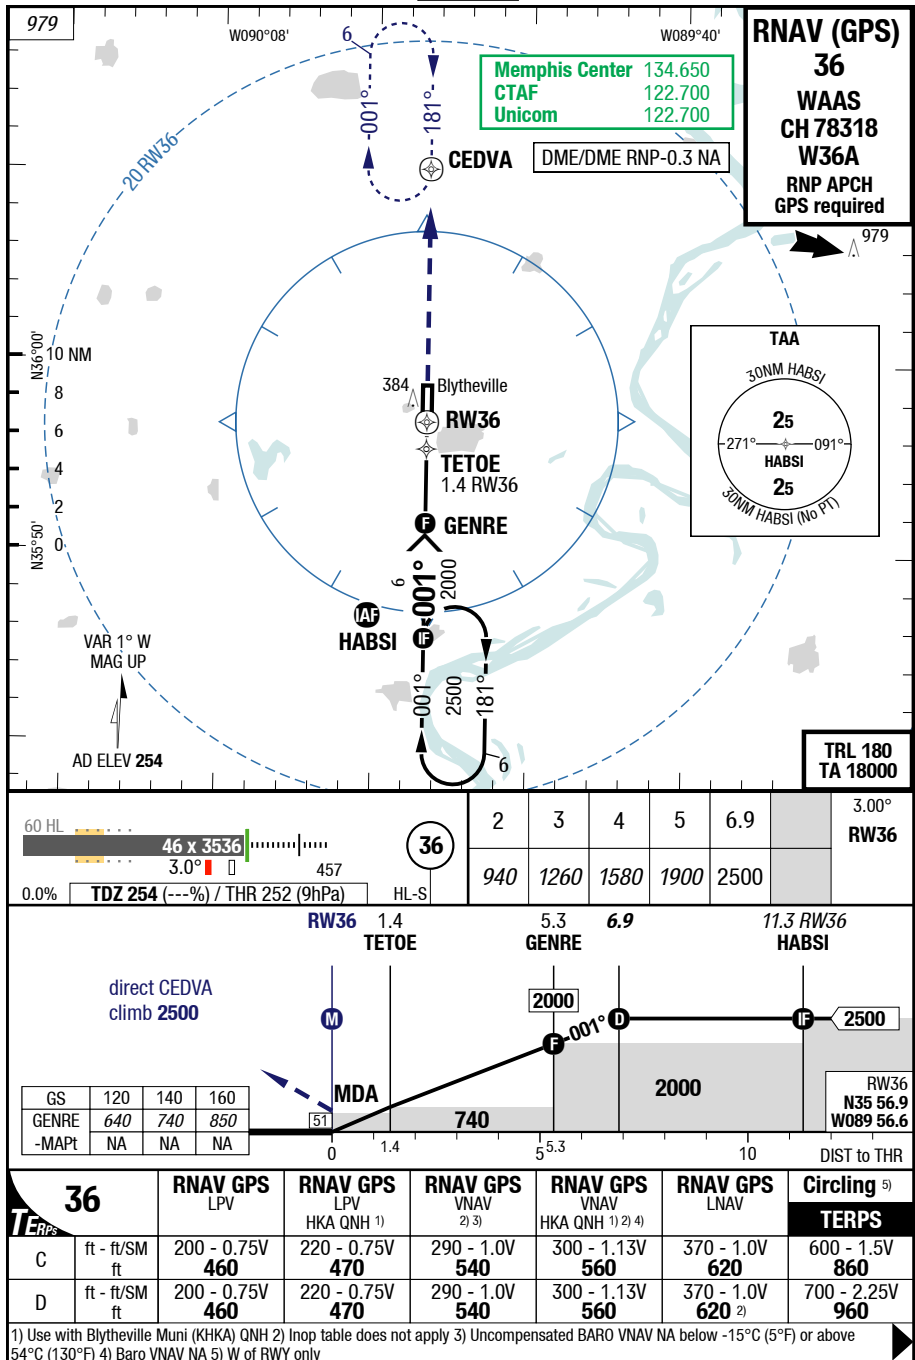

## BYH-KBYH

7-50

## WxMinima Overflow

<b>TERPS</b>	<b>18</b>	<b>RNAV GPS</b> LNAV HKA QNH 1)					
	C	ft - ft/SM ft	390 - 1.13V <b>640</b>				
	D	ft - ft/SM ft	390 - 1.13V <b>640</b>				
1) Use with Blytheville Muni (KHKA) QNH							
<b>TERPS</b>	<b>36</b>	<b>RNAV GPS</b> LNAV HKA QNH 1) 2)					
	C	ft - ft/SM ft	390 - 1.13V <b>640</b>				
	D	ft - ft/SM ft	390 - 1.13V <b>640</b>				
1) Use with Blytheville Muni (KHKA) QNH 2) Inop table does not apply							