

**GENERAL****Operational Hours****ATS Hours / AD ADMIN Hours:** 2300-1500**Airport Information****RFF:** CAT 6**Fuel:** Not AVBL**PCN:** RWY 05/23: 43/F/D/X/T**Customs:** Not AVBL**Operation****Parking**

Marshaller mandatory.


**Warnings**

Birds in vicinity of RWY 23.

**ARRIVAL****Communication****COM Failure:** See CRAR.**DEPARTURE****Take-off Minima**

RWY		05/23	
All ACFT	ft - m/km	0 - 400V	-


**Communication****COM Failure:** See CRAR.

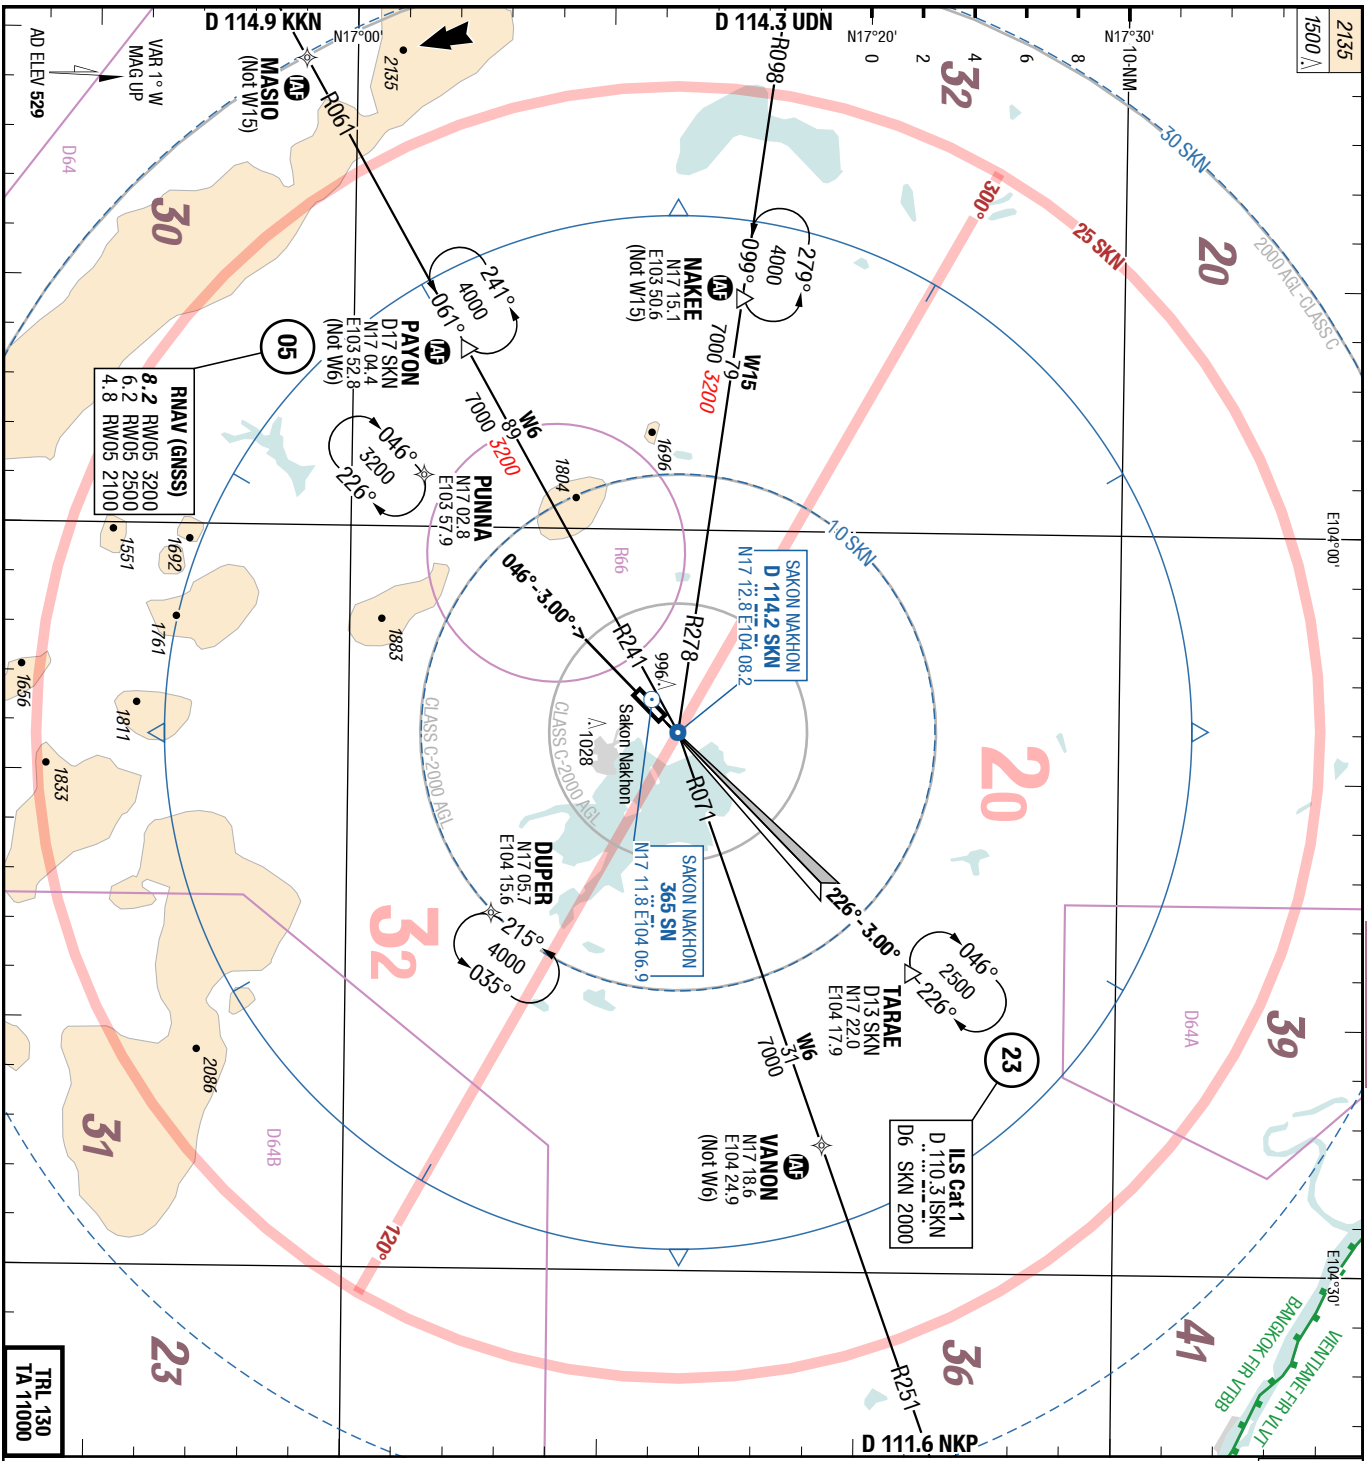

ATIS	375.0	2300-1500
APP	123.350	2300-1500
TWR	119.650	2300-1500

Landing RWY system:	
05	2600 x 45
THR 529 (19hPa) / TDZ 529 (---%)	
23	45 x 2600
TDZ 526 (---%) / THR 526 (19hPa)	

ATIS	375.0	2300-1500
TWR	119.650	2300-1500

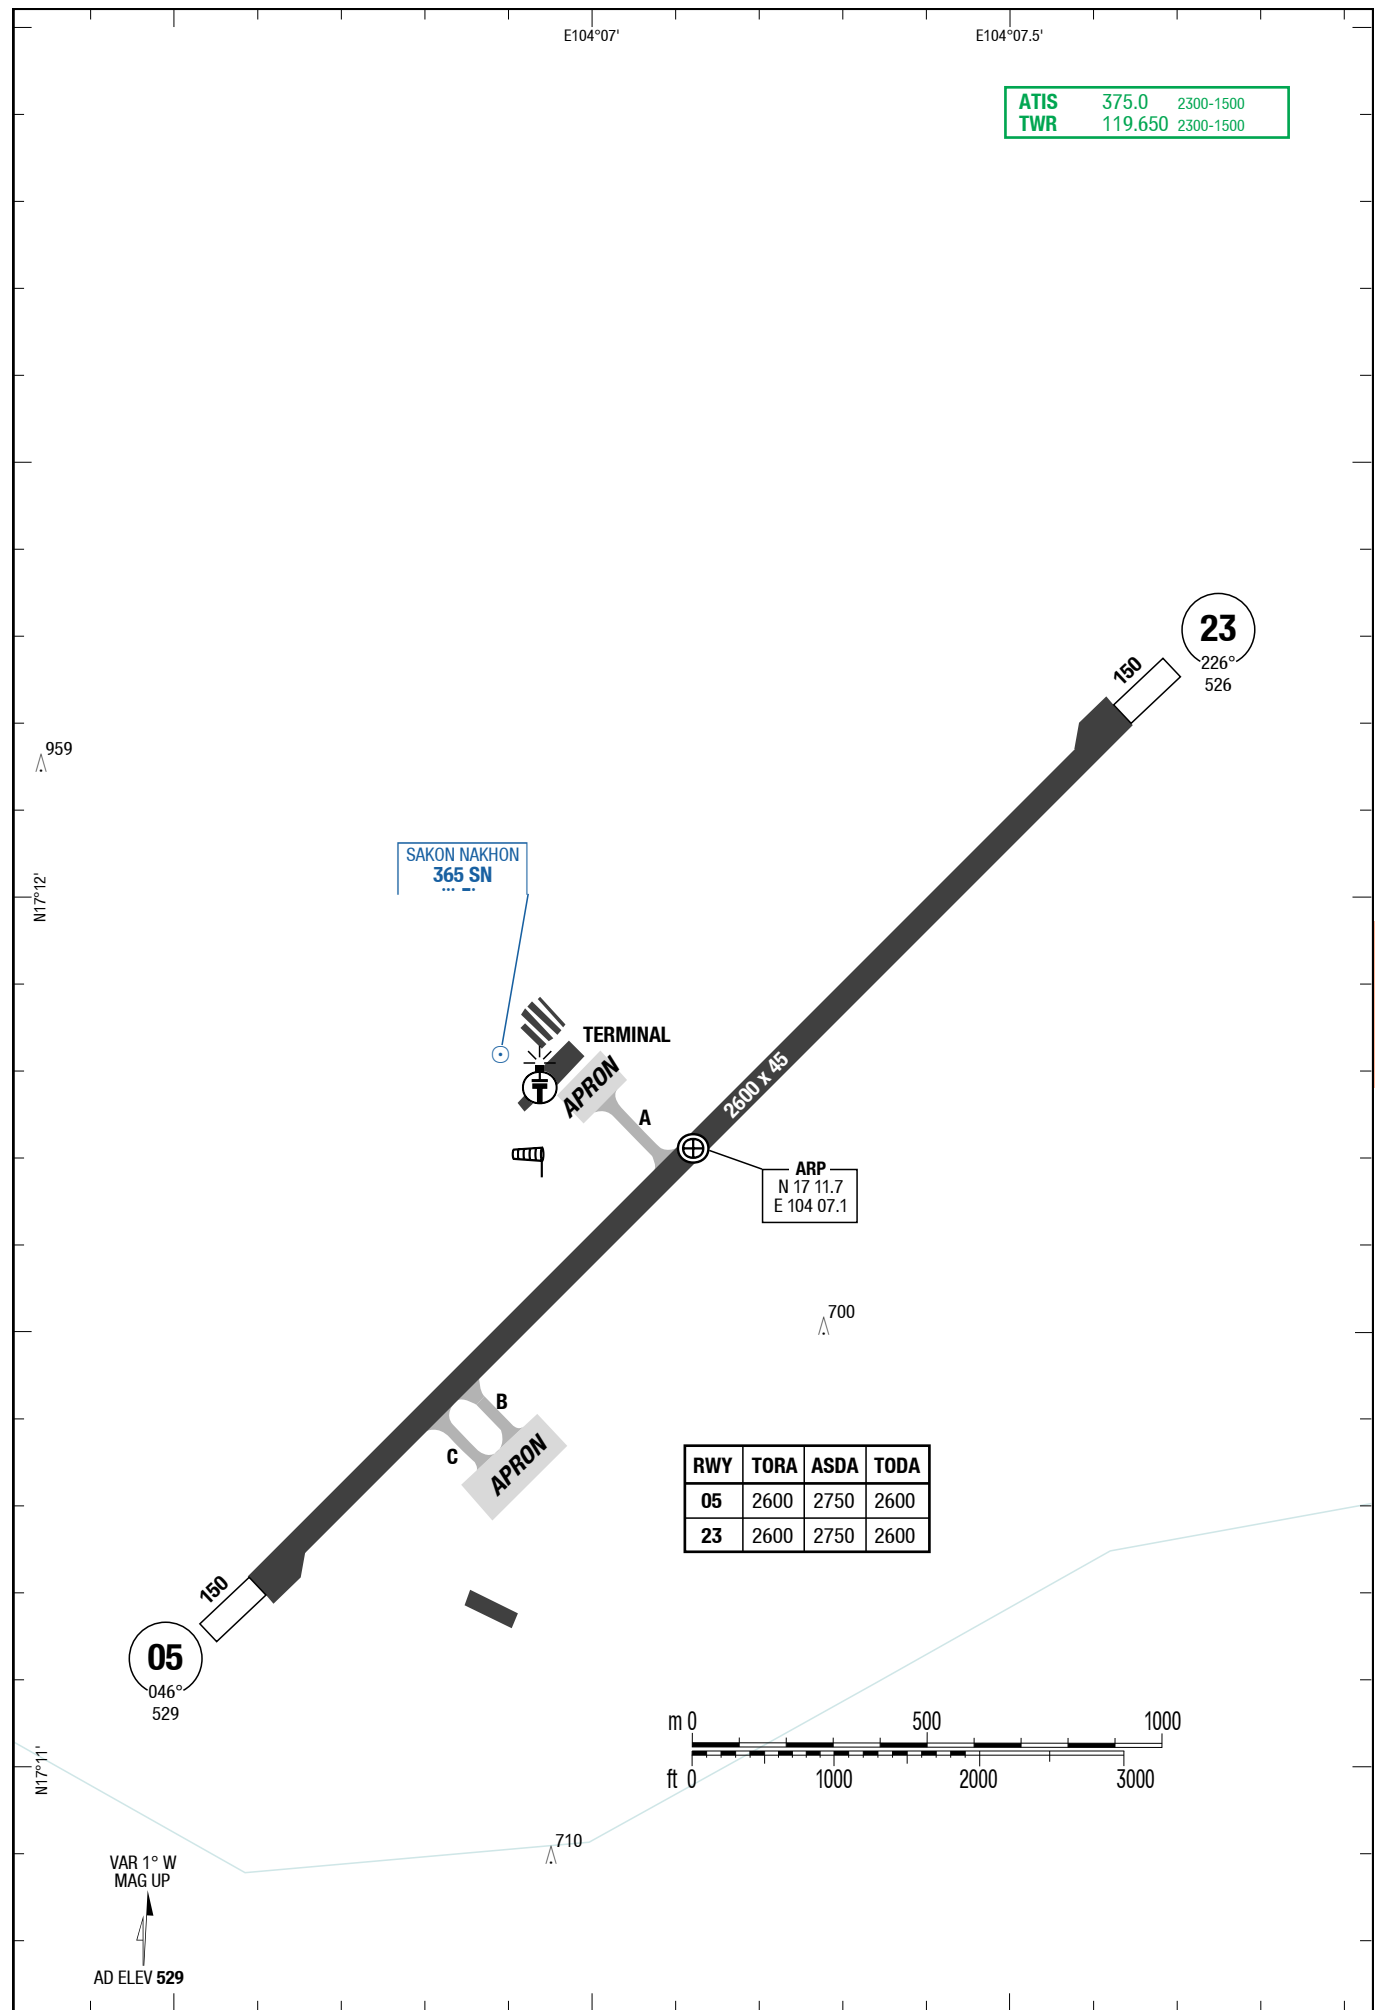



RWY	TORA	ASDA	TODA
05	2600	2750	2600
23	2600	2750	2600

Changes: FREQ, OBST

SNO-VTUI

7-10

ILS 23 / LOC 23

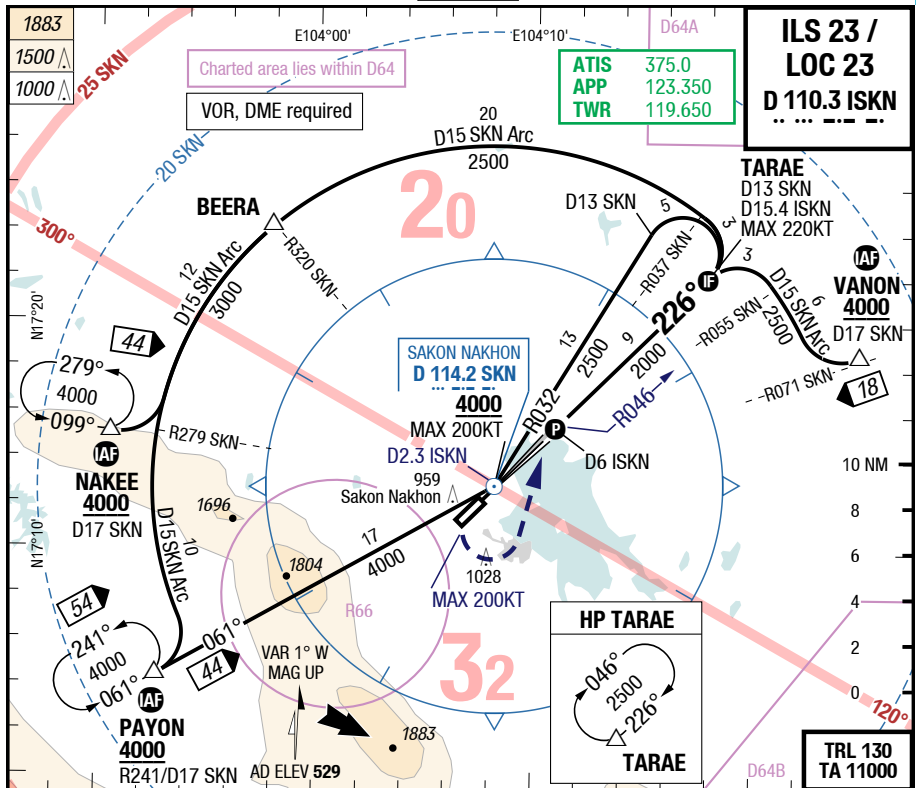

23

3	4	5	7	7.6		LOC 3.00° D ISKN
1050	1370	1690	2320	2500		

**LT (MAX 200KT)**  
intercept R046 SKN  
to TARAE  
climb 2500


GS	120	140	160
D6 ISKN	640	740	850
-MAPt	1:52	1:36	1:24

ISKN

D2.3

D6

D7.6 ISKN

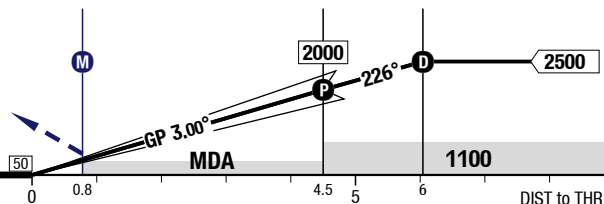


23	Cat 1 DME 1)	LOC DME				Circling
C	ft - m/km ft	240 - 800 760	310 - 1.0 830			880 - 2.4V 1400
D	ft - m/km ft	240 - 800 760	310 - 1.0 830			880 - 3.6V 1400

1) With EVS 550m

Changes: FREQ

## RNAV (GNSS) 05

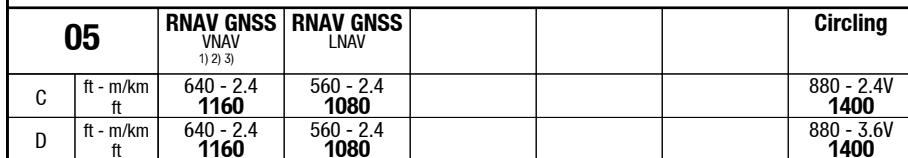




© Lido 2018

Changes: FREQ

## SNO-VTUI

7-40

## RNAV (GNSS) 23

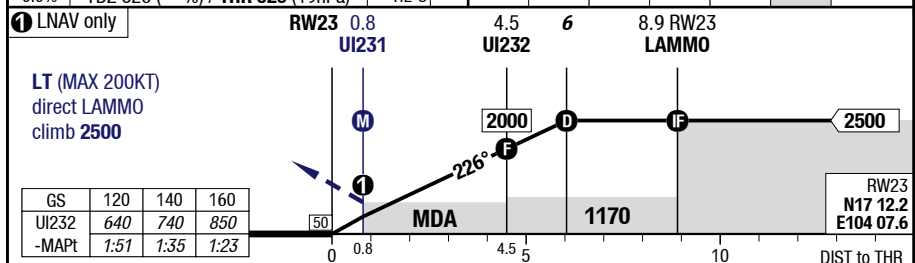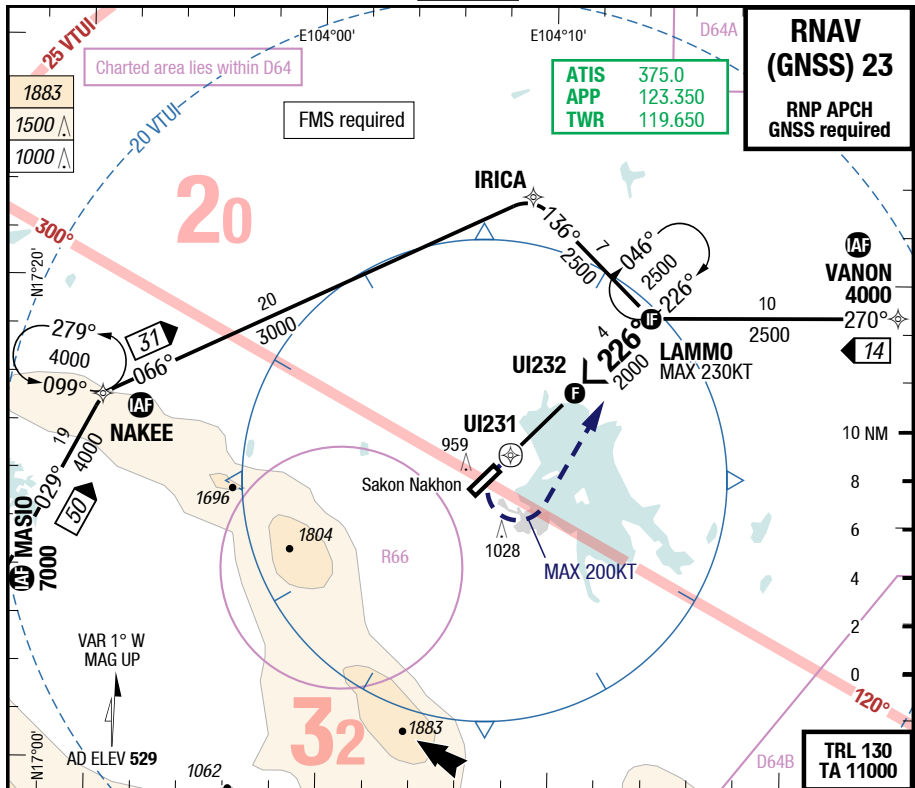


23		RNAV GNSS VNAV 1) 2) 3)	RNAV GNSS LNAV	Circling	
C	ft - m/km ft	650 - 2.4 1170	560 - 2.1 1080		880 - 2.4V 1400
D	ft - m/km ft	650 - 2.4 1170	560 - 2.1 1080		880 - 3.6V 1400

1) Uncompensated BARO VNAV NA below 0°C (32°F)

3) With EVS 1.6km

2) SBAS-VNAV not authorized




Changes: FREQ

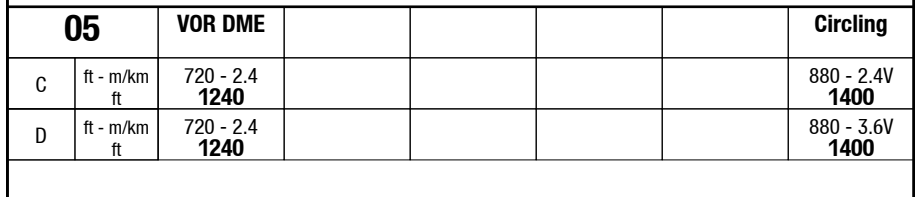

SNO-VTUI

7-60

VOR 23

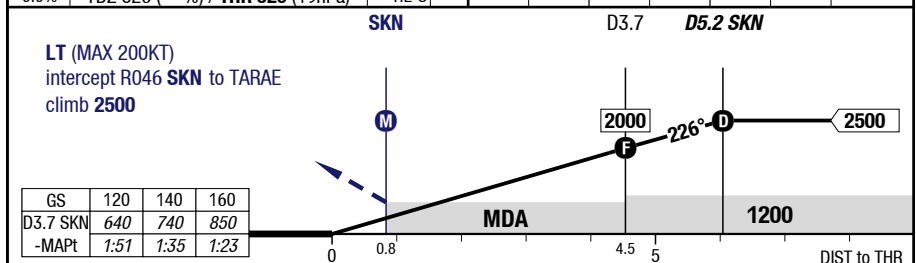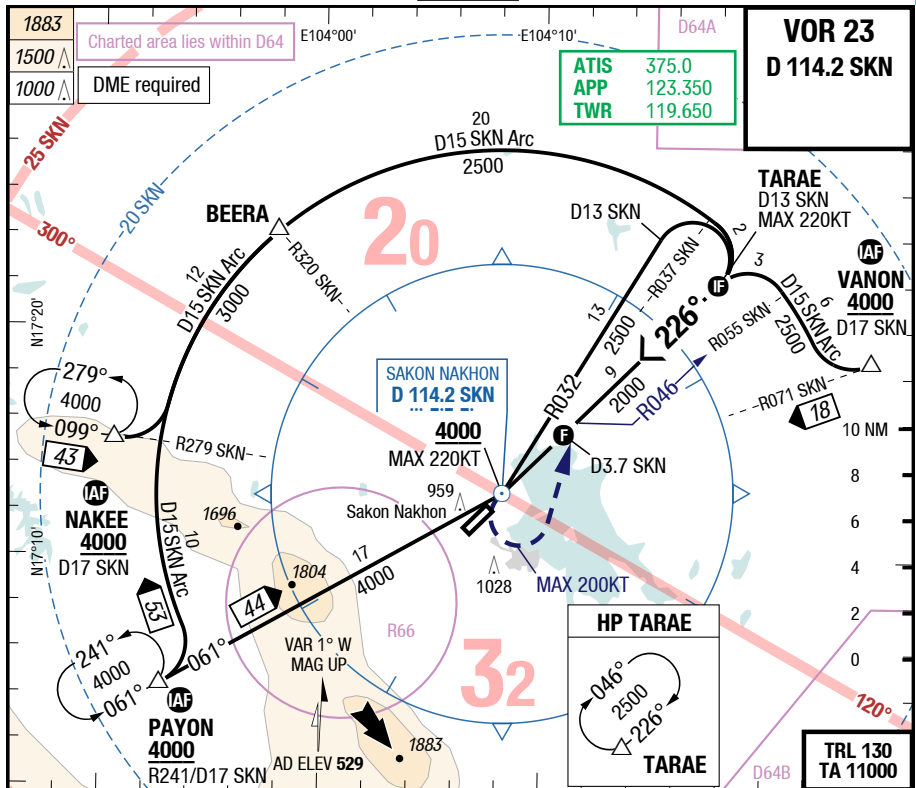

23	VOR DME					Circling
C	ft - m/km ft	560 - 2.1 1080				880 - 2.4V 1400
D	ft - m/km ft	560 - 2.1 1080				880 - 3.6V 1400