

GENERAL

ATS Hours

H24, attended MON-FRI 1300-2200†

Airport Information

RFF: O/R
Fuel: JET A
PCN: O/R

Operation

Traffic Notes

RWY and APCH lights are turned off when TWR CLSD, thereafter activation by CTAF.

Warnings

During daylight HRS tailwinds may exist over APCH ends RWY 06/24 simultaneously.
 Seagulls and Birds in vicinity of AD.

ARRIVAL

Speed

MAX IAS 250KT below 10000ft.

Communication

COM Failure: See CRAR United States.

DEPARTURE

Take-off Minima

RWY		06/24	
1+2 ENG	ft - ft/SM	0 - 1.0V	-
3+4 ENG		0 - 0.5V	-


Speed

MAX IAS 250KT below 10000ft.

Communication

COM Failure: See CRAR United States.

NIL
AFC



02-DEC-2010
OSC-KOSC

United States **Oscoda** Oscoda-Wurtsmith


AGC


AGC

AGC


AGC

Oscoda-Wurtsmith **Oscoda** United States

3-20

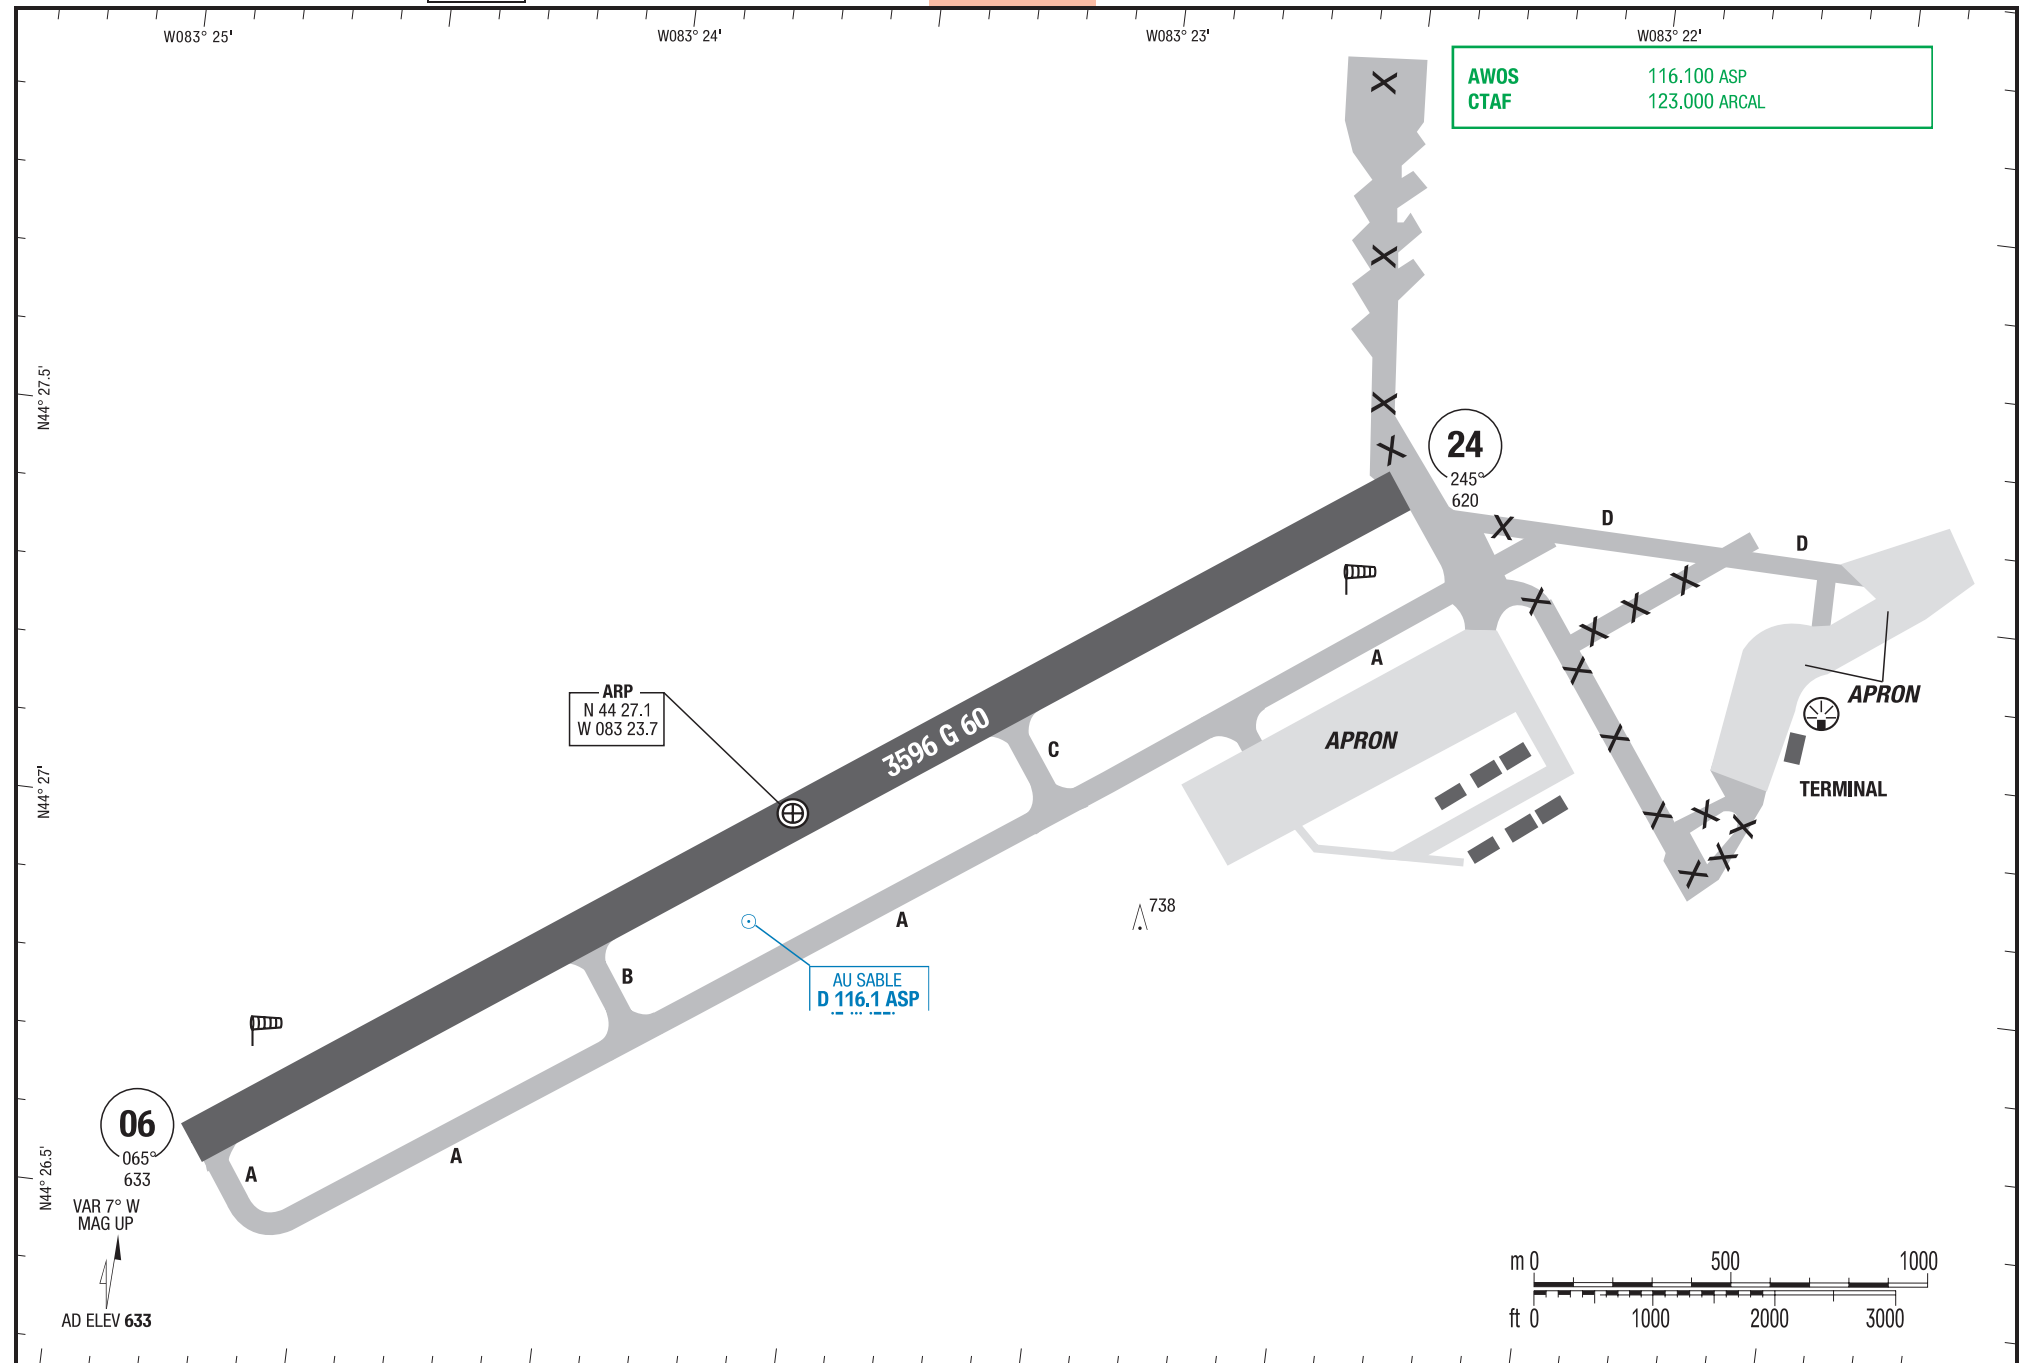


Changes: TWY A,B,C and D, APN, WDI, BLDG


ILS or LOC + DME 24

AMDT 3

16-OCT-2014

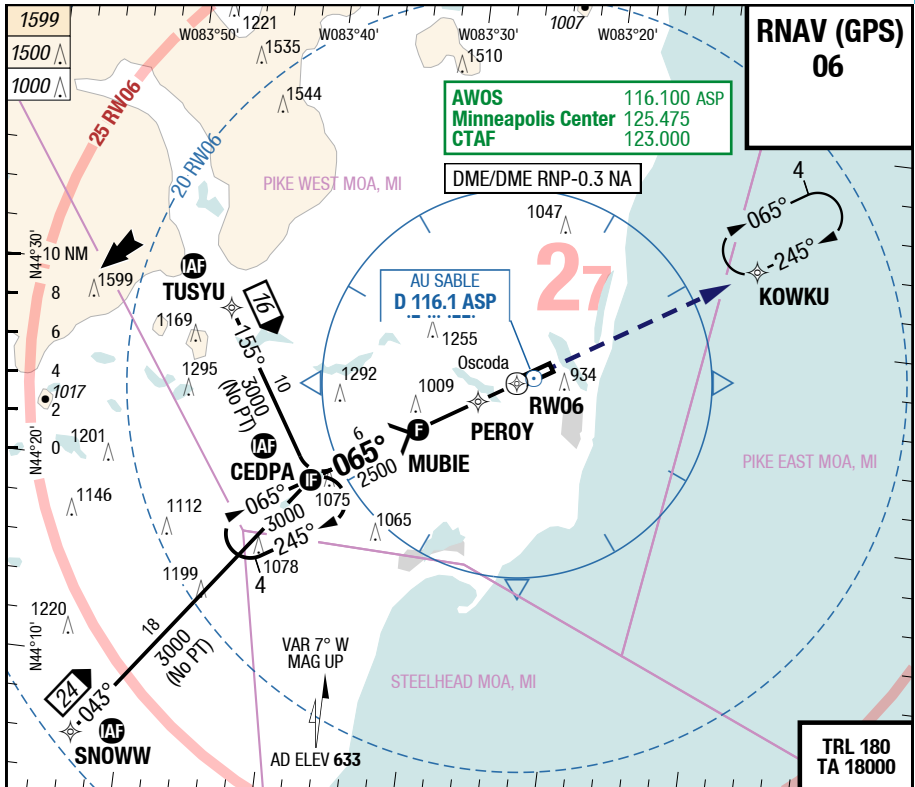OSC-KOSC**7-30****RNAV (GPS) 06**

3.00° RW06	7.1	6	5	4	3	2	06	3.0°	HL
	3000	2630	2310	1990	1660	1340		3596 G 60	
								633 / 23hPa	TDZ ---% -0.1%

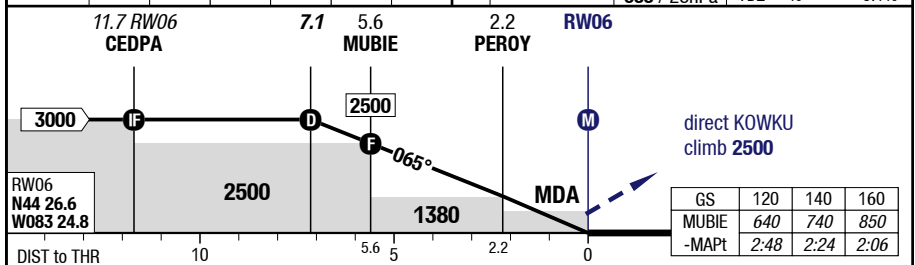

06	RNAV GPS VNAV ^(1) 2)	RNAV GPS VNAV APN QNH ^(3) 4)	RNAV GPS LNAV	RNAV GPS LNAV APN QNH ⁽⁴⁾	Circling ^(4) 5) TERPS	Circling ⁽⁵⁾ TERPS
C	ft - ft/SM ft 520 - 1.75V 1150	620 - 2.25V 1250 ⁽⁶⁾	450 - 1.25V 1080	550 - 1.5V 1180	1130 - 3.0V 1760	1030 - 3.0V 1660
D	ft - ft/SM ft 520 - 1.75V 1150	620 - 2.25V 1250 ⁽⁶⁾	450 - 1.5V 1080	550 - 1.75V 1180	1130 - 3.0V 1760	1030 - 3.0V 1660

1) With EVS VIS 1.25SM 2) Uncompensated BARO VNAV NA below -16°C (4°F) or above 47°C (116°F) 3) BARO VNAV NA 4) Use with
Alpena (KAPN) QNH 5) NW of RWY 06/24 only 6) With EVS VIS 1.5SM



16-OCT-2014
OSC-KOSC

United States **Oscoda** Oscoda-Wurtsmith

IAC

7-40

RNAV (GPS) 24

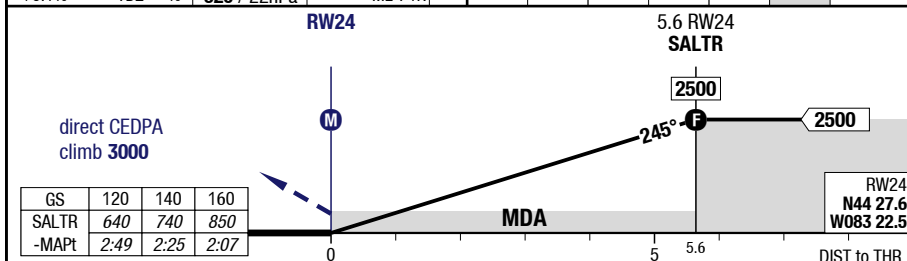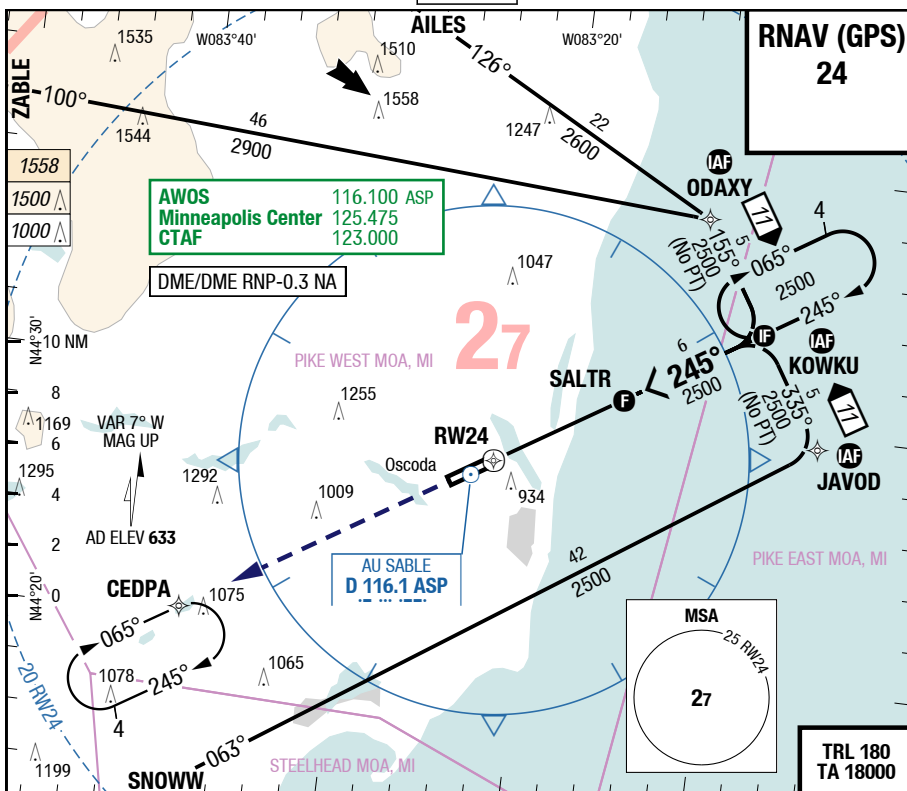

24	RNAV GPS VNAV ^(1) 2)	RNAV GPS VNAV APN QNH ^(3) 4)	RNAV GPS LNAV	RNAV GPS LNAV APL U/S	Circling ^(4) 5) TERPS	Circling ⁽⁵⁾ TERPS
C	ft - ft/SM ft	380 - 0.75V 1010	480 - 1.25V 1100 ⁽⁶⁾	360 - 0.63V 980	610 - 1.75V 1240	600 - 1.5V 1240
D	ft - ft/SM ft	380 - 0.75V 1010	480 - 1.25V 1100 ⁽⁶⁾	360 - 1.0V 980	700 - 2.25V 1340	700 - 2.25V 1340


1) With EVS VIS 0.5SM 2) Uncompensated BARO VNAV NA below -16°C (4°F) or above 47°C (116°F) 3) BARO VNAV NA 4) Use with
Alpena (KAPN) QNH 5) NW of RWY 06/24 only 6) With EVS VIS 0.75SM

Changes: Editorial

Orig

© Lido 2014

7-50

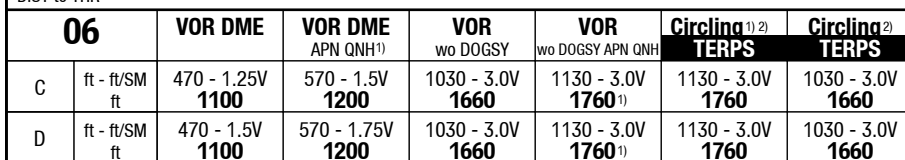

© Lido 2014

OSC-KOSC

7-70

WxMinima Overflow

24		RNAV GPS LNAV APN QNH ¹⁾					
C	ft - ft/SM ft	460 - 0.88V 1080					
D	ft - ft/SM ft	460 - 1.0V 1080					
1) Use with Alpena (KAPN) QNH							
24		LOC DME ASP APN QNH ¹⁾					
C	ft - ft/SM ft	460 - 0.88V 1080					
D	ft - ft/SM ft	460 - 1.0V 1080					
1) Use with Alpena (KAPN) QNH							