

GENERAL**Operational Hours****ATS Hours / AD Operator Hours:** H24**AD ADMIN Hours:** 0600-1445±, other times O/R.**Airport Information****RFF:** CAT 7**Fuel:** 0600-2100±, other times O/R**PCN:** RWY 14L/32R: 120/F/B/W/T**Operation****Traffic Note**

24HR PPR required for all FLTS.

TWY Restrictions

TWY J width 22m / 72ft.

TWY A, B width 21m / 69ft.

TWY I width 14m / 46ft.

TWY F, K, L, M, P width 12m / 39ft.

CIV ACFT taxiing only on TWY A, B, G, H, I, J, N, O.

Taxi/Parking

Marshaller and follow-me O/R.

When taxi guide lines not visible due to snow, REQ follow-me.

Warnings**SAU VOR/DME OPR** HR O/R.**ARRIVAL****Warnings****ILS/LOC RWY 14L/32R:** LOC coverage restricted to 25° left/right of RCL.**DEPARTURE****Take-off Minima**

RWY		14L/32R	
All ACFT	ft - m/km	0 - 400R/400v	HJ only
		0 - 800R/800v	HN
RWY		14R/32L	
All ACFT	ft - m/km	Not authorized	MIL OPR only

ATC Slot, Clearance

REQ TWR for push-back and taxi CLR.

De-Icing

AVBL between 0600-2100±, other times O/R.

Lithuania **Siauliai** Siauliai Intl.


SQQ-EYSA




AGC
AFC


AFC

AGC
AFC

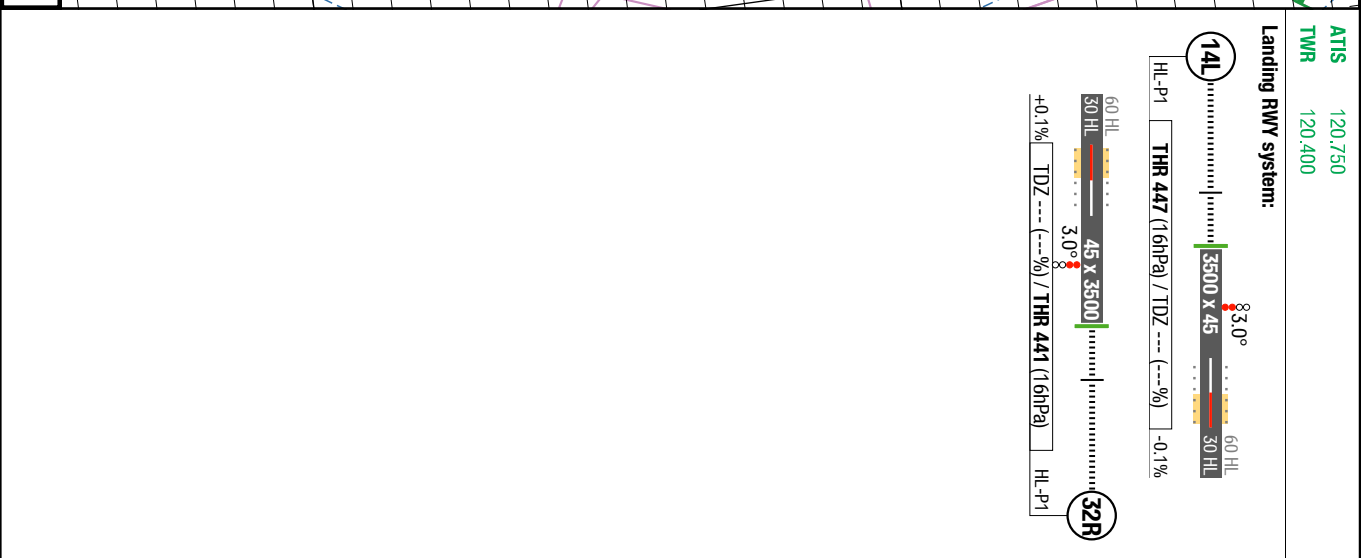


© Lido 2018

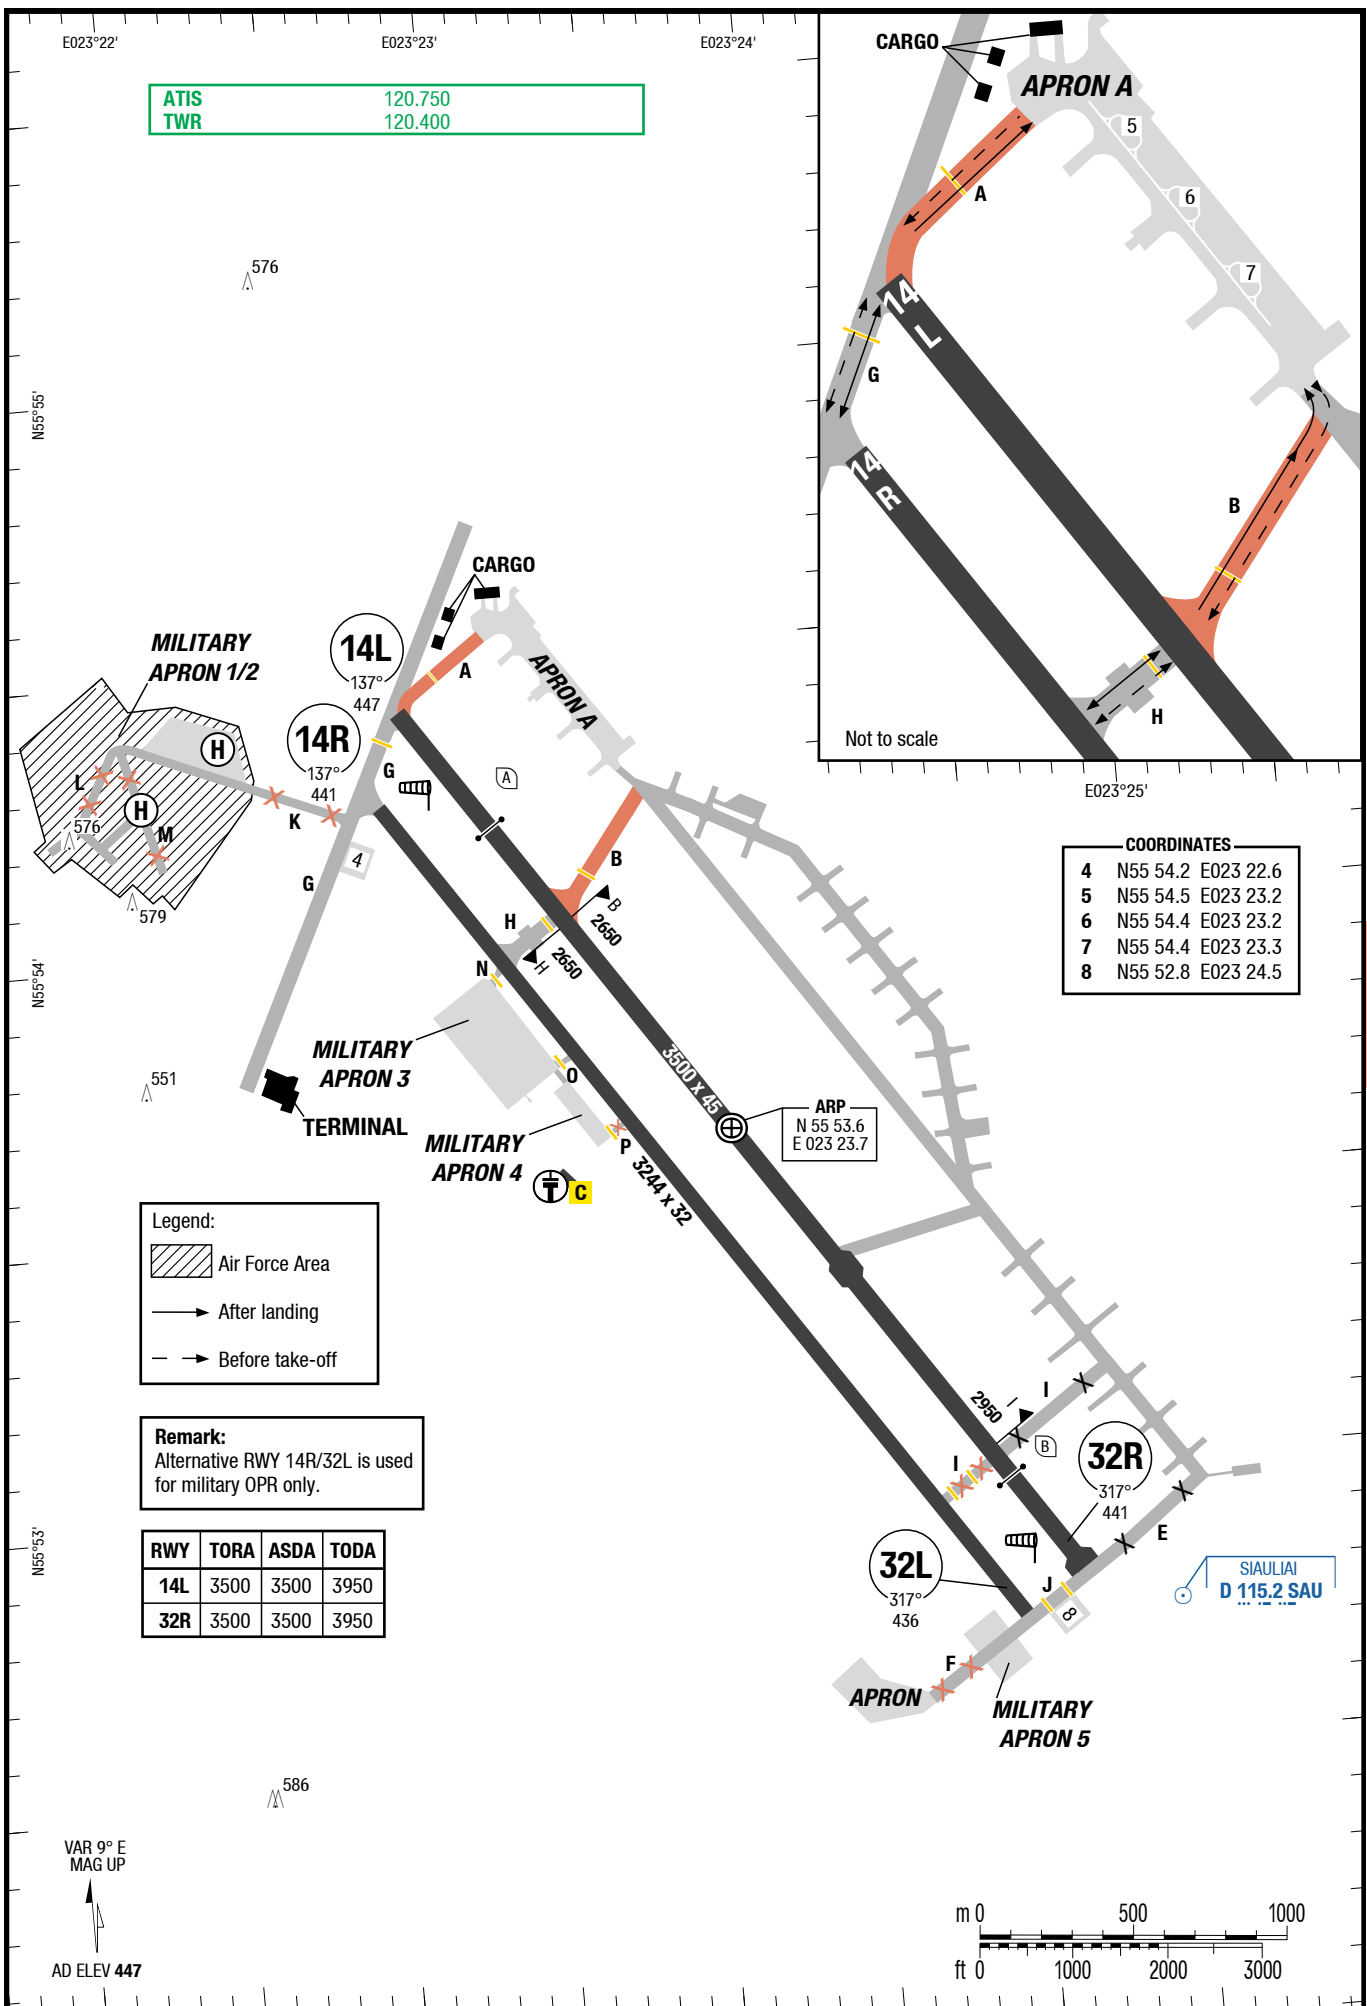

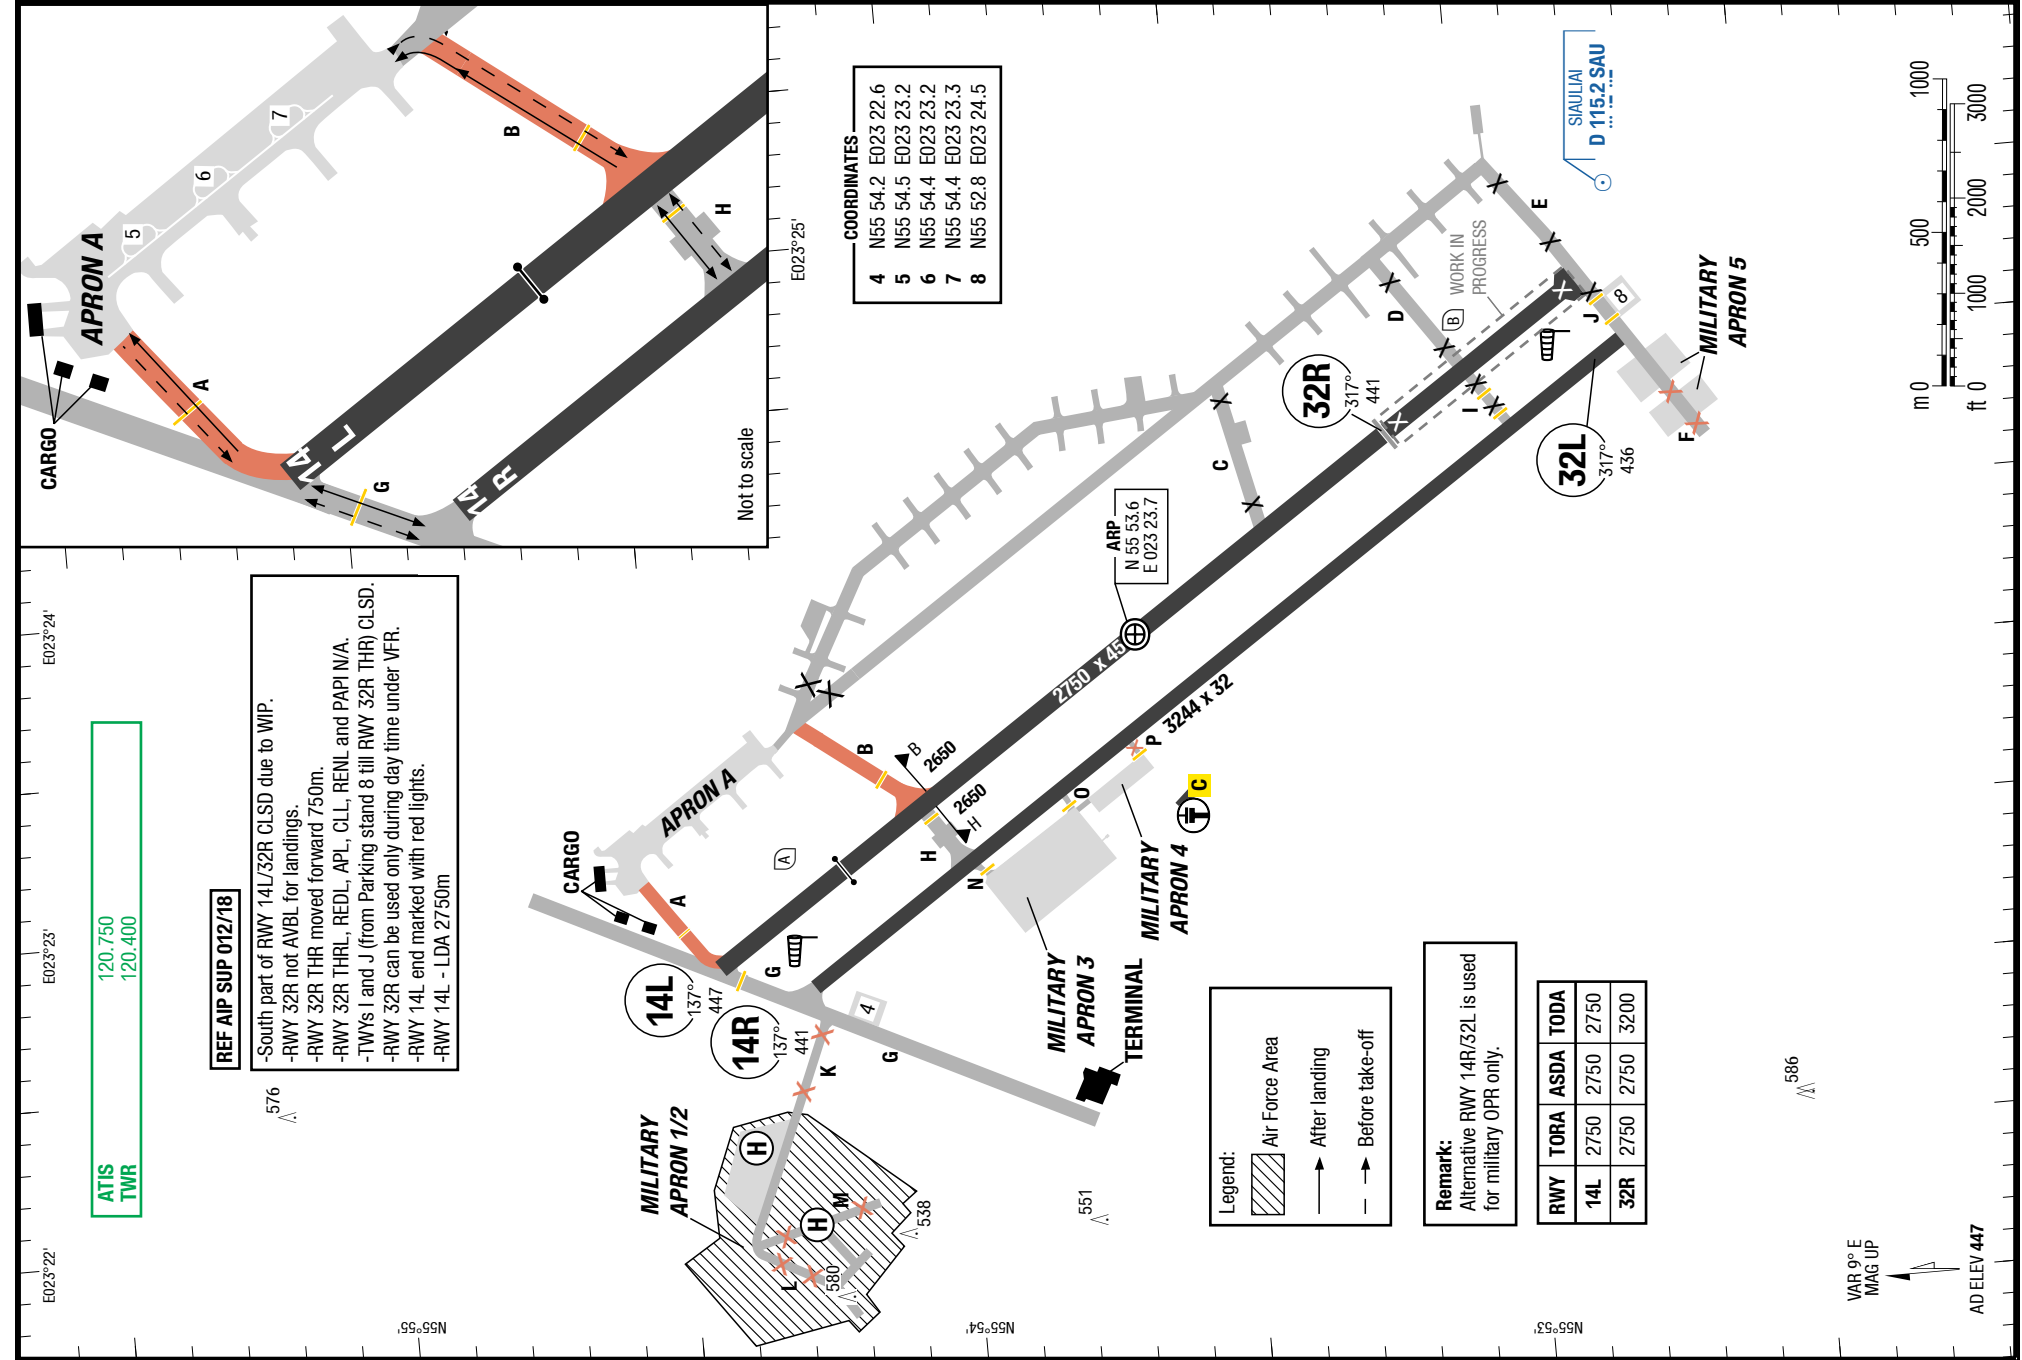


SQQ-EYSA

7-10

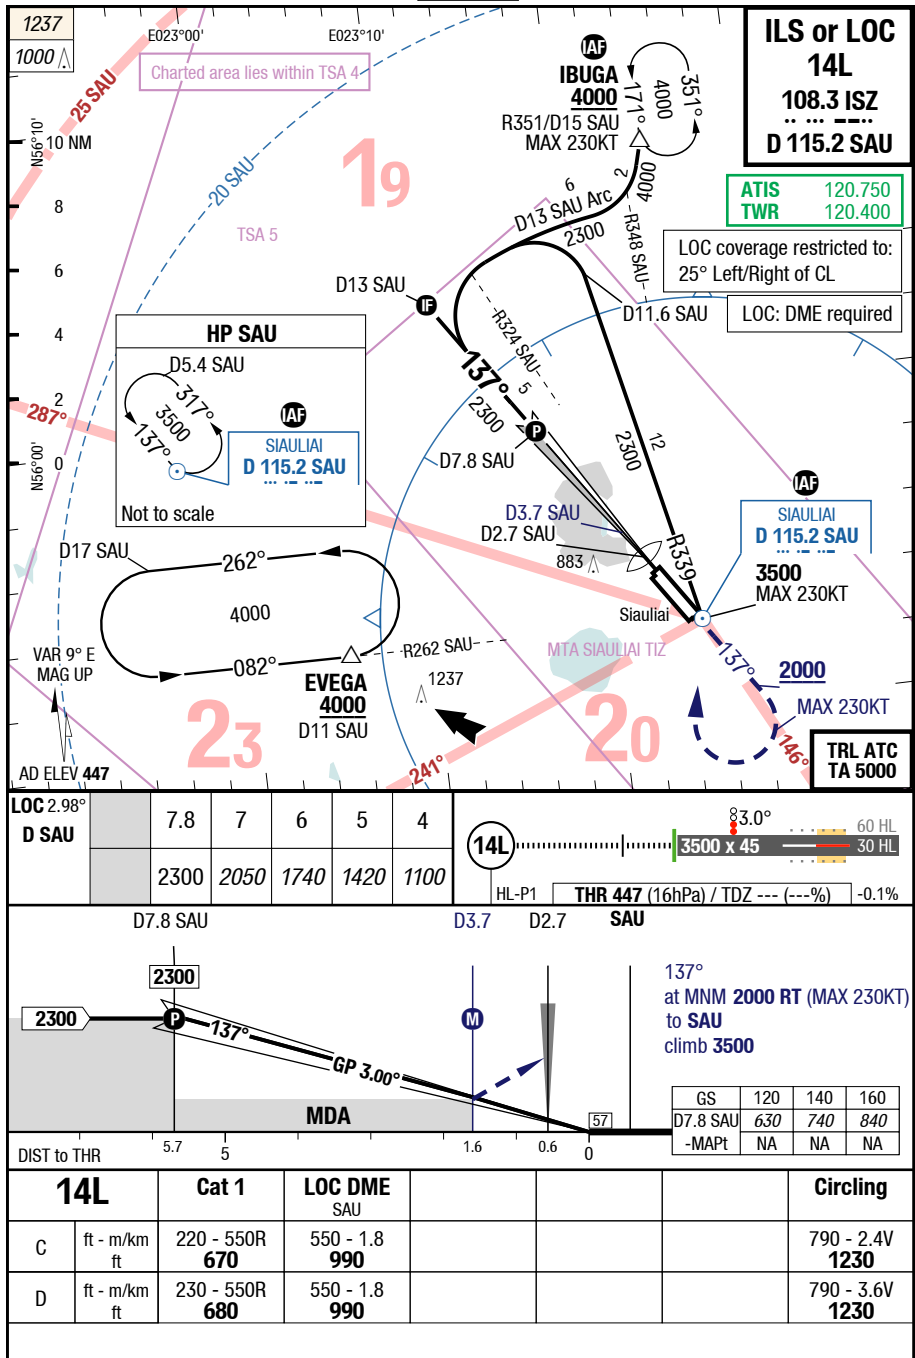ILS or LOC 14L

SQQ-EYSA

7-20

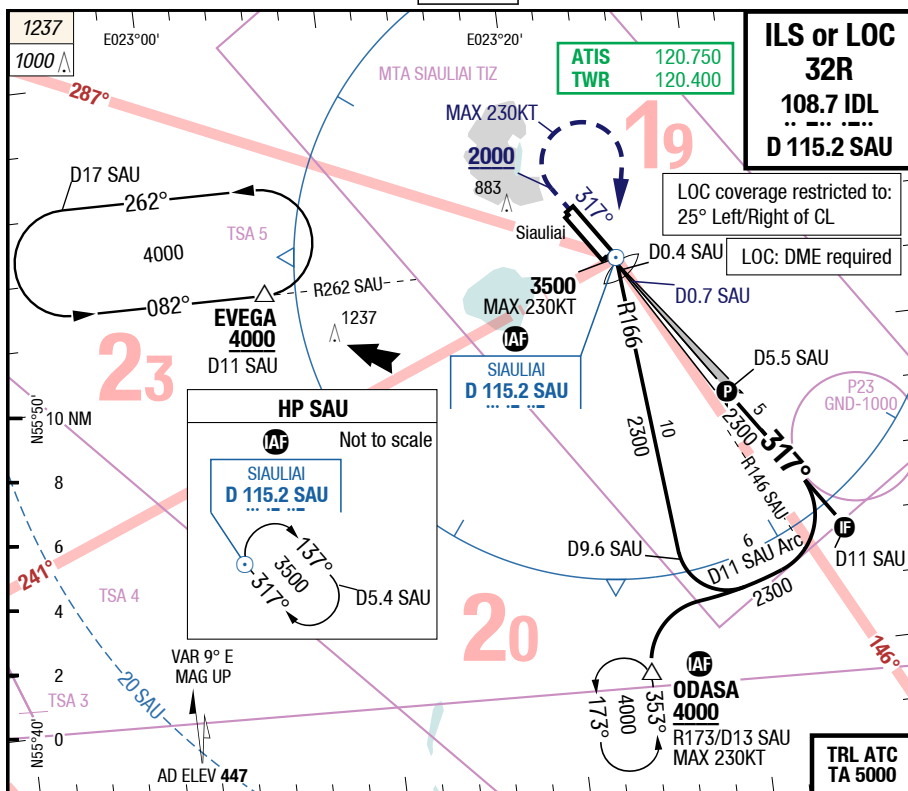ILS or LOC 32R

32R		Cat 1	LOC DME SAU	LOC DME SAU APL U/S	Circling	
C	ft - m/km ft	220 - 550R 660	310 - 1.0R 750	310 - 1.8 750	790 - 2.4V 1230	
D	ft - m/km ft	230 - 550R 670	310 - 1.4R 750	310 - 2.0 750	790 - 3.6V 1230	

13-JUL-2017


Lithuania **Siauliai** Siauliai Intl.

IAC


SQQ-EYSA

7-30

VOR 14L

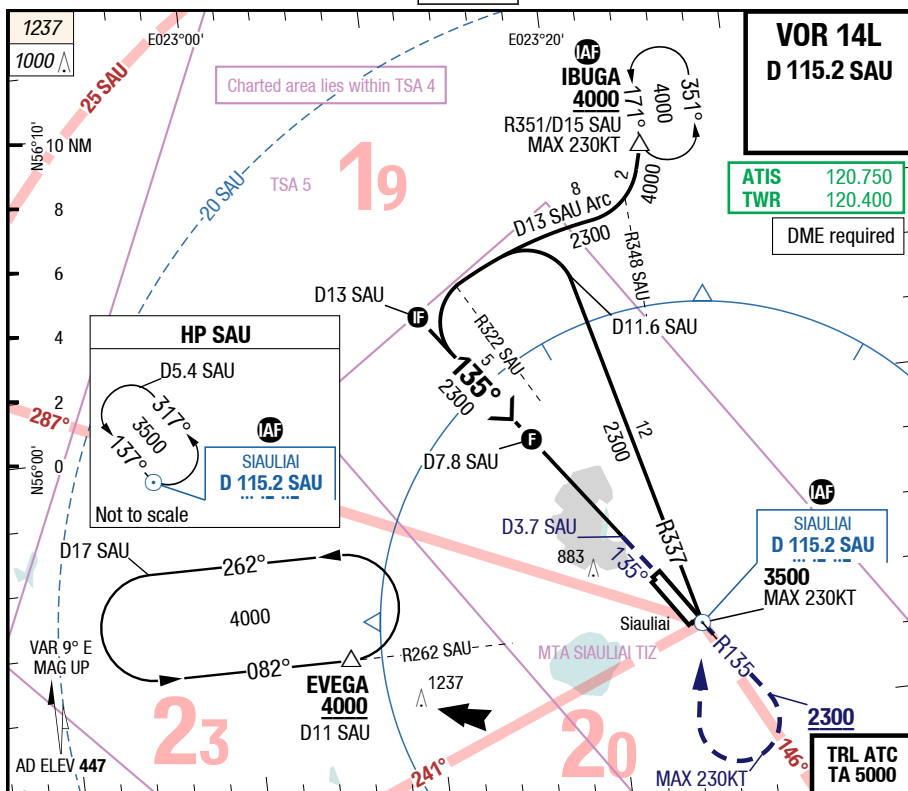

3.00° D SAU 135° RWY 137°		7.8	7	6	5	4	
		2300	2060	1740	1430	1110	

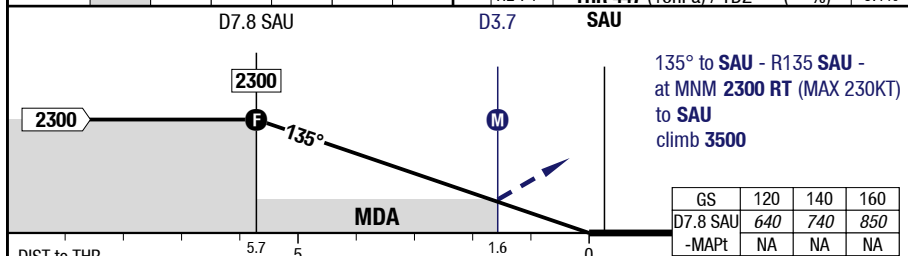


14L		VOR DME				Circling
C	ft - m/km ft	550 - 1.8 990				790 - 2.4V 1230
D	ft - m/km ft	550 - 1.8 990				790 - 3.6V 1230

Changes: APL, ALT, SUAs, OBST, AD ELEV

SQQ-EYSA

7-40

VOR 32R

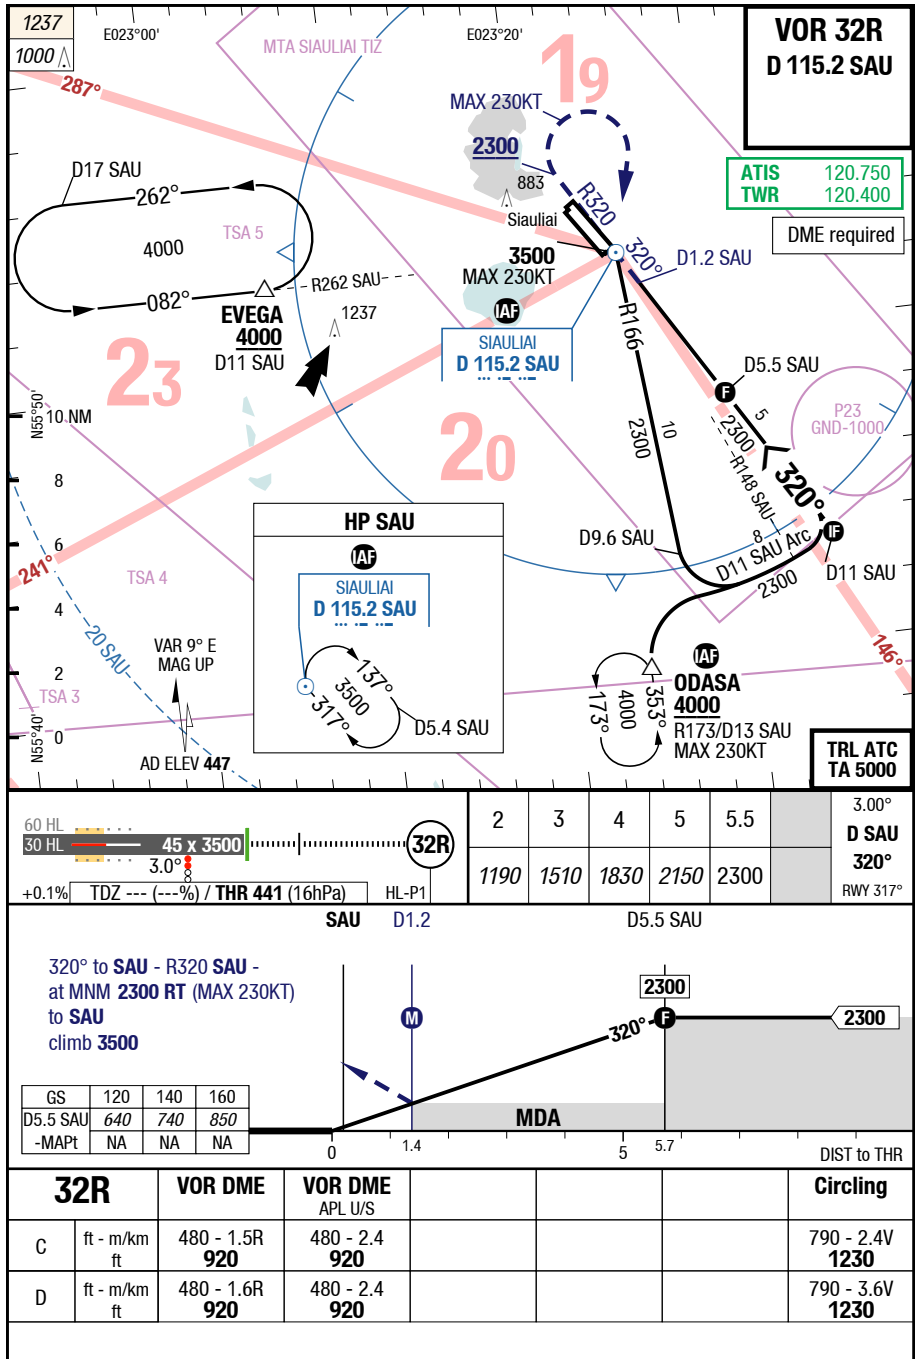

Effective 20-JUL-2017

13-JUL-2017

SQQ-EYSA

Lithuania **Siauliai** Siauliai Intl.

NIL

MRC

MRC


MRC

Siauliai Intl. **Siauliai** Lithuania

NIL

MRC

8-10

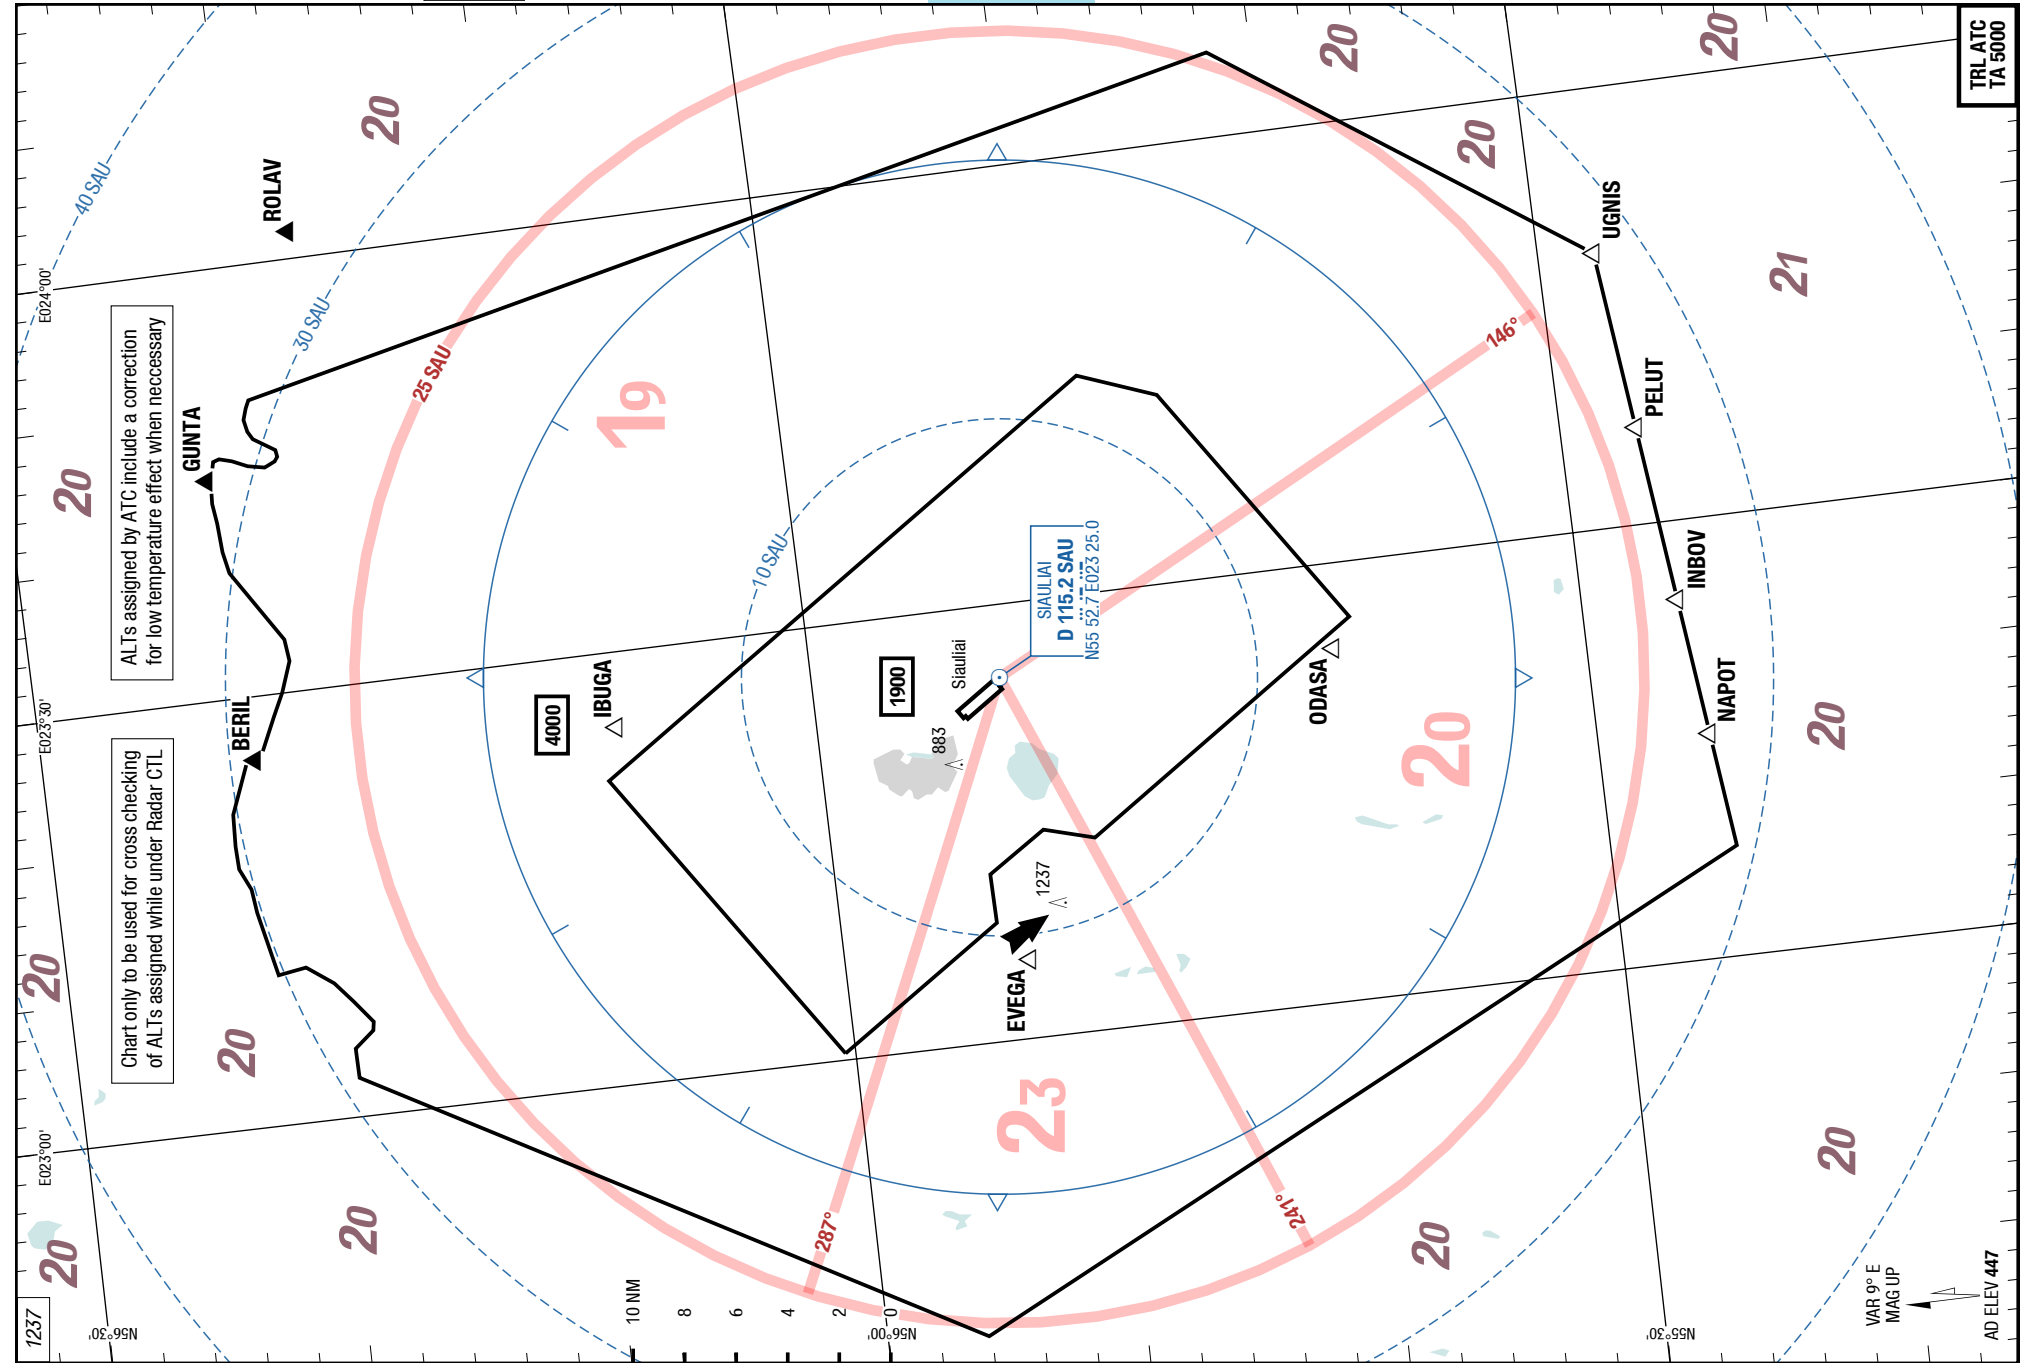

ALIs assigned by ATC include a correction for low temperature effect when necessary

Chart only to be used for cross checking of ALIs assigned while under Radar CTL

TRL ATC
TA 5000

VAR 9° E
MAG UP
AD ELEV 447