

POWER: 14500 Li-ion (4.2V cells only) -> reverse-polarity P-FET Q1 -> SW1 -> VBAT

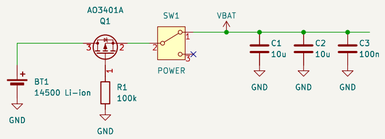


MIC BIAS (always-on 2.5V, so PTT can be detected while idle) / JACK / MIC INPUT / PTT DETECT

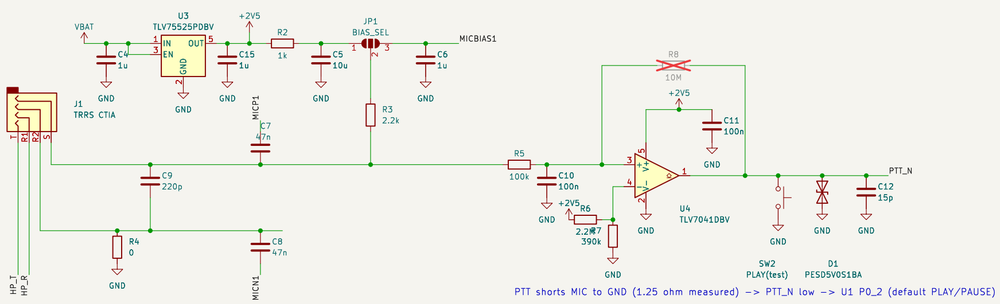


J1: T/R1 = air-tube earpiece (via SW4), R2 = mic return, S = MIC (CTIA)


PTT shorts MIC to GND (1.25 ohm measured) -> PTT_N low -> U1 P0_2 (default PLAY/PAUSE)


U1: BM83 #1 standard FW (Embedded) - HFP/A2DP sink, throat mic

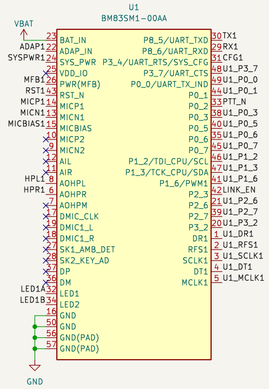



U2: BM83 #2 AT FW (Embedded) - A2DP source to Shokz OpenRun

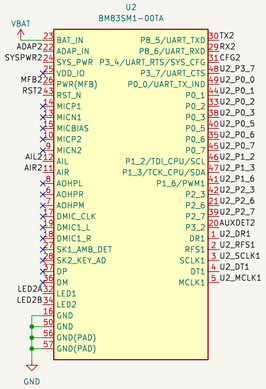




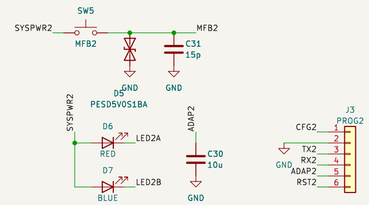






U1 AUDIO OUT (Config: Speaker Output = Single End) -> line to U2 Aux-in / -> SW4 -> air-tube earpiece

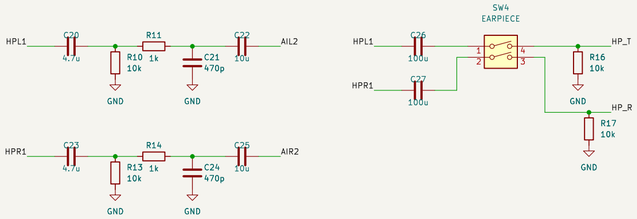

U2 Aux-in detect (P3_2): JP2 1-2 = always detected, 2-3 = follow U1 LINK_EN (D11, unverified)



Values marked 仮/要確認 in BOM must be verified before ordering
Generated by hardware/tools/gen_v0.py - edit the script, not this file

Sheet: /
File: bm83_rx_v0.kicad_sch

Title: BM83 throat-mic BT receiver - dev board v0

Size: A2	Date: 2026-11-01	**Rev: v0.2**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1