Unit 2Relay


SKU:U131



















Description

Unit 2Relay is a dual-channel relay-controlled high-voltage driver unit. It integrates two normally open (NO) mechanical relays, which are directly controlled via GPIO logic levels, supporting AC 250V / DC 28V high-voltage switching with a rated current of 8A per channel. The unit communicates through a Grove HY2.0-4P interface, features physical isolation and status indicator LEDs, and adopts a LEGO-compatible mounting hole design, enabling flexible integration with LEGO structures or screw mounting. It is suitable for smart home applications, appliance control, and safe power management in industrial equipment scenarios.

Features

- Channel Count: 2 independently controlled relay channels
- Load Capacity: AC 250V@8A or DC 28V@8A
- Status Indication: Independent LED indicator for each channel
- Control Method: Direct GPIO logic-level drive
- Communication Interface: Grove HY2.0-4P
- 2 x LEGO-compatible mounting holes
- Development Platform
  - UiFlow1
  - UiFlow2
  - Arduino IDE

Includes

- 1 x Unit 2Relay
- 1 x HY2.0-4P Grove connection cable (20cm)
- 2 x HT3.96-4P terminals

Applications

- AC/DC signal switching
- Power on/off for digital devices

Specifications


Specification	Parameter
Max Switching Voltage	AC 250V / DC 28V
Rated Current	8A
Coil Control Voltage	DC 5V
Coil Power Consumption	5V@154mA
Coil Action Time	≤ 8ms
Coil Release Time	≤ 5ms
Contact Form	Normally Open (NO)
Contact Material	AgSnO2
Relay Indicator Light	Blue x2
Product Size	56.0 x 24.0 x 19.0mm
Product Weight	20.0g
Package Size	138.0 x 93.0 x 17.0mm
Gross Weight	31.2g

Learn

This relay is driven by IO output high/low level signals, so before connecting to the main controller, ensure that the connected port

IO supports configuration as output mode. (Note: ESP32's G36 does not allow configuration as output mode, so PORT.B will not be able to drive properly)

Schematics

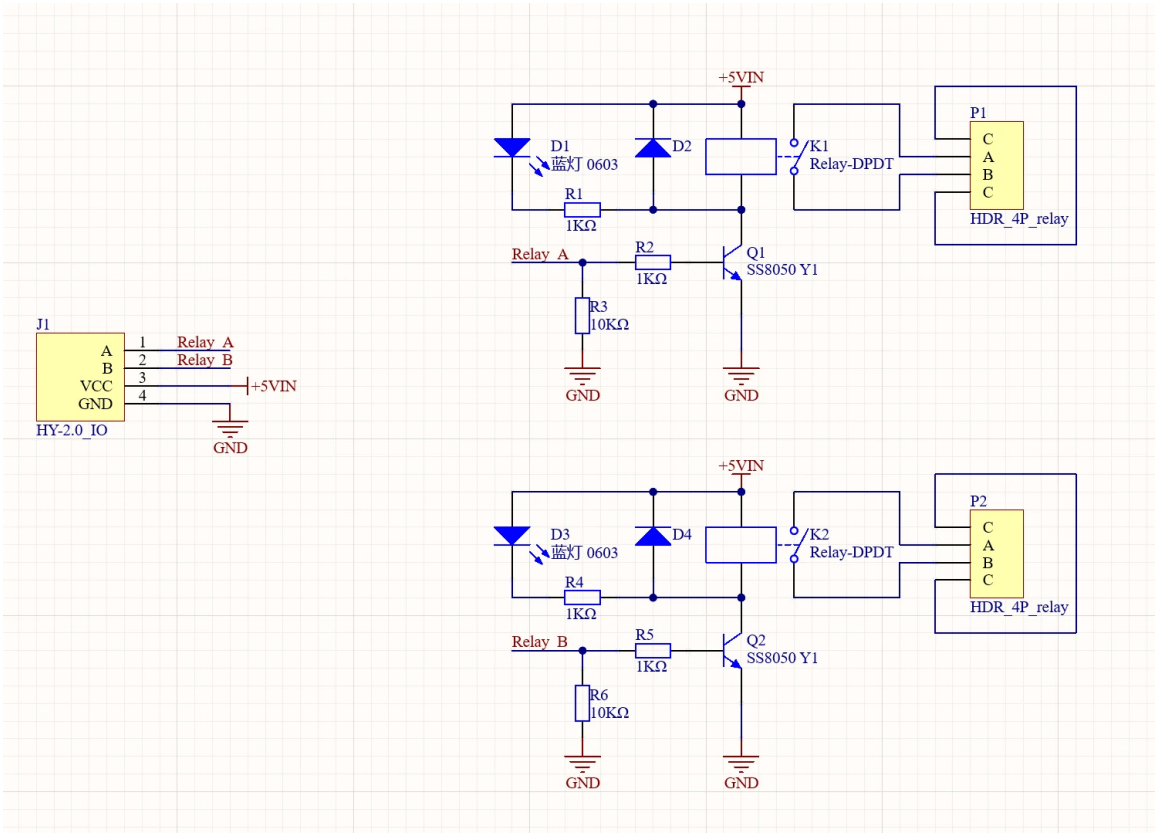


PinMap

Unit 2Relay

HY2.0-4P	Black	Red	Yellow	White
PORT.A	GND	5V	RELAY-2	RELAY-1

Model Size

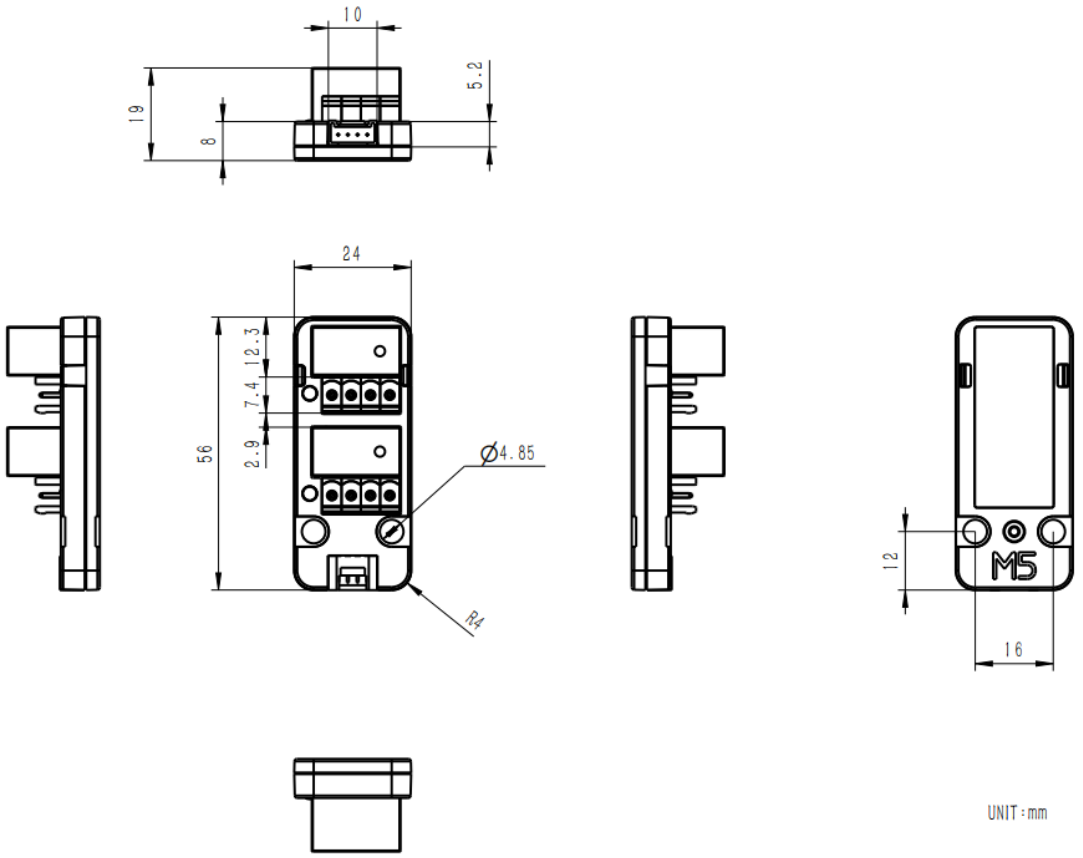

Structure

- Unit 2Relay Structure Files

Softwares

Arduino

- Unit 2Relay Arduino Tutorial
- Unit 2Relay Example with M5Atom
- Unit 2Relay Example with M5Core
- Unit 2Relay Example with M5Core2
- Unit 2Relay Example with M5StickC
- Unit 2Relay Example with M5StickC-Plus

UiFlow1

- Unit 2Relay UiFlow1 Docs

UiFlow2

- Unit 2Relay UiFlow2 Docs