
ERD to logical design

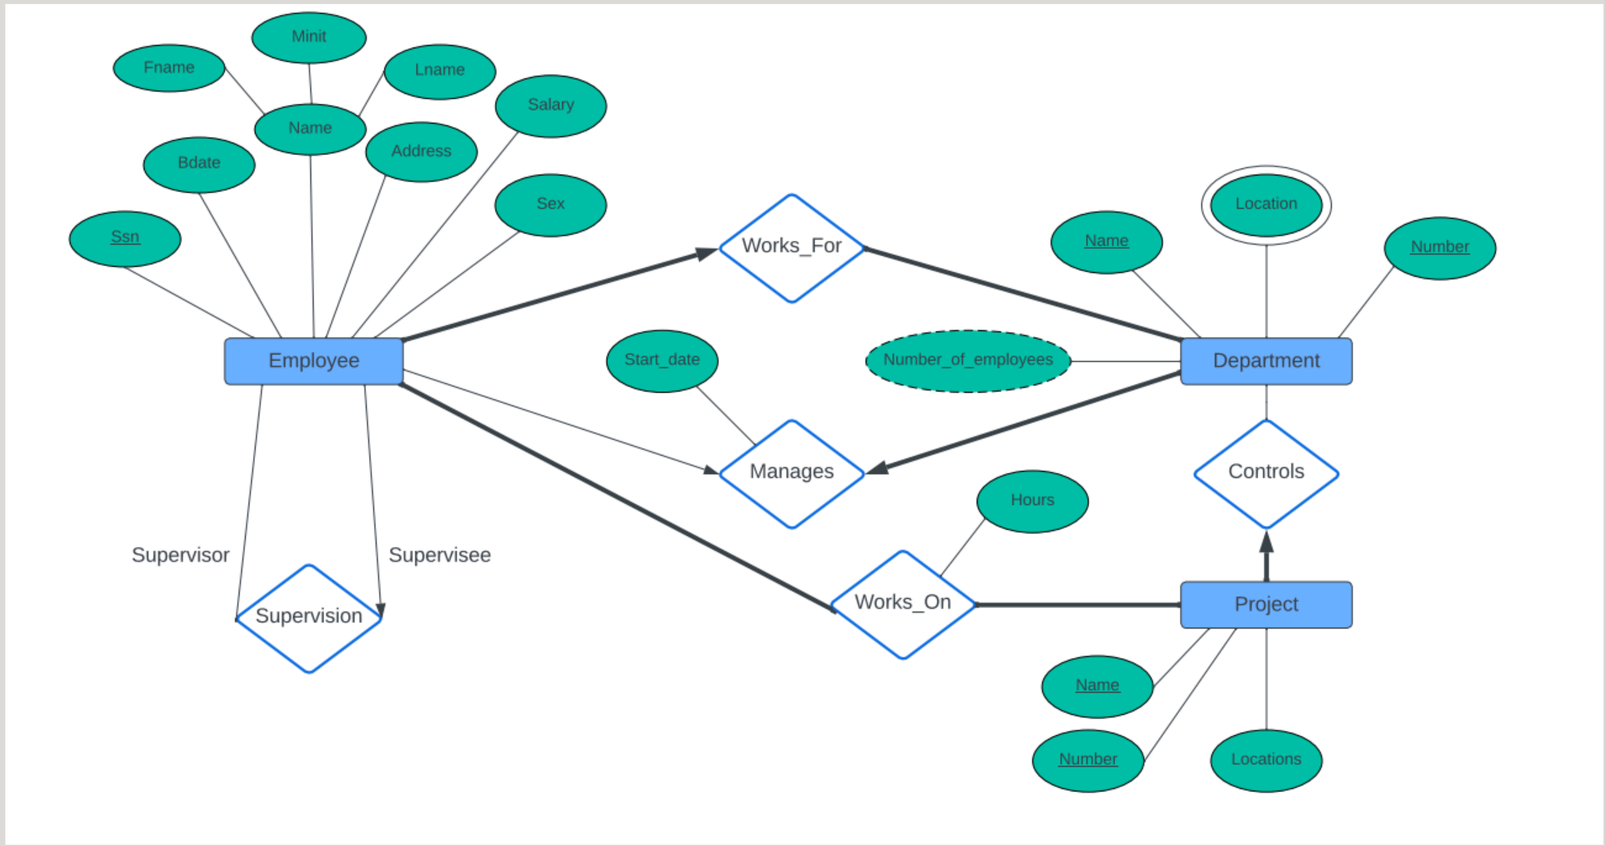


```
create table employee(
ssn char(10) primary key,
fname varchar(30),
minit char(1),
lastname varchar(40),
address varchar(100),
bdate date,
salary decimal(10,2),
sex boolean,
supervisor_id char(10),
works_for int not null
);

create table department(
number int primary key,
name varchar(10),
manager_id char(10) not null,# for total partipaction constraint
start_date date
);

create table deploc(
depnum int,
location varchar(10),
primary key (depnum, location),

);


create table project(
number int primary key,
name varchar(10),
location varchar(10),
dept_id int not null
);

create table works_on (
essn char(10),
pnumber int,
hours int,
primary key(essn, pnumber)
);


alter table employee
add constraint employee_sup foreign key (supervisor_id) references employee(ssn),
add constraint employee_worksfor foreign key (works_for) references department(number);


alter table deploc
add constraint dep_loc foreign key (depnum) references department(number);

alter table department
add constraint  foreign key (manager_id ) references employee(ssn);


alter table project
add constraint  foreign key (dept_id) references department(number);


alter table works_on
add constraint  foreign key (essn) references employee(ssn),
add constraint  foreign key (pnumber) references project(number),
;
```