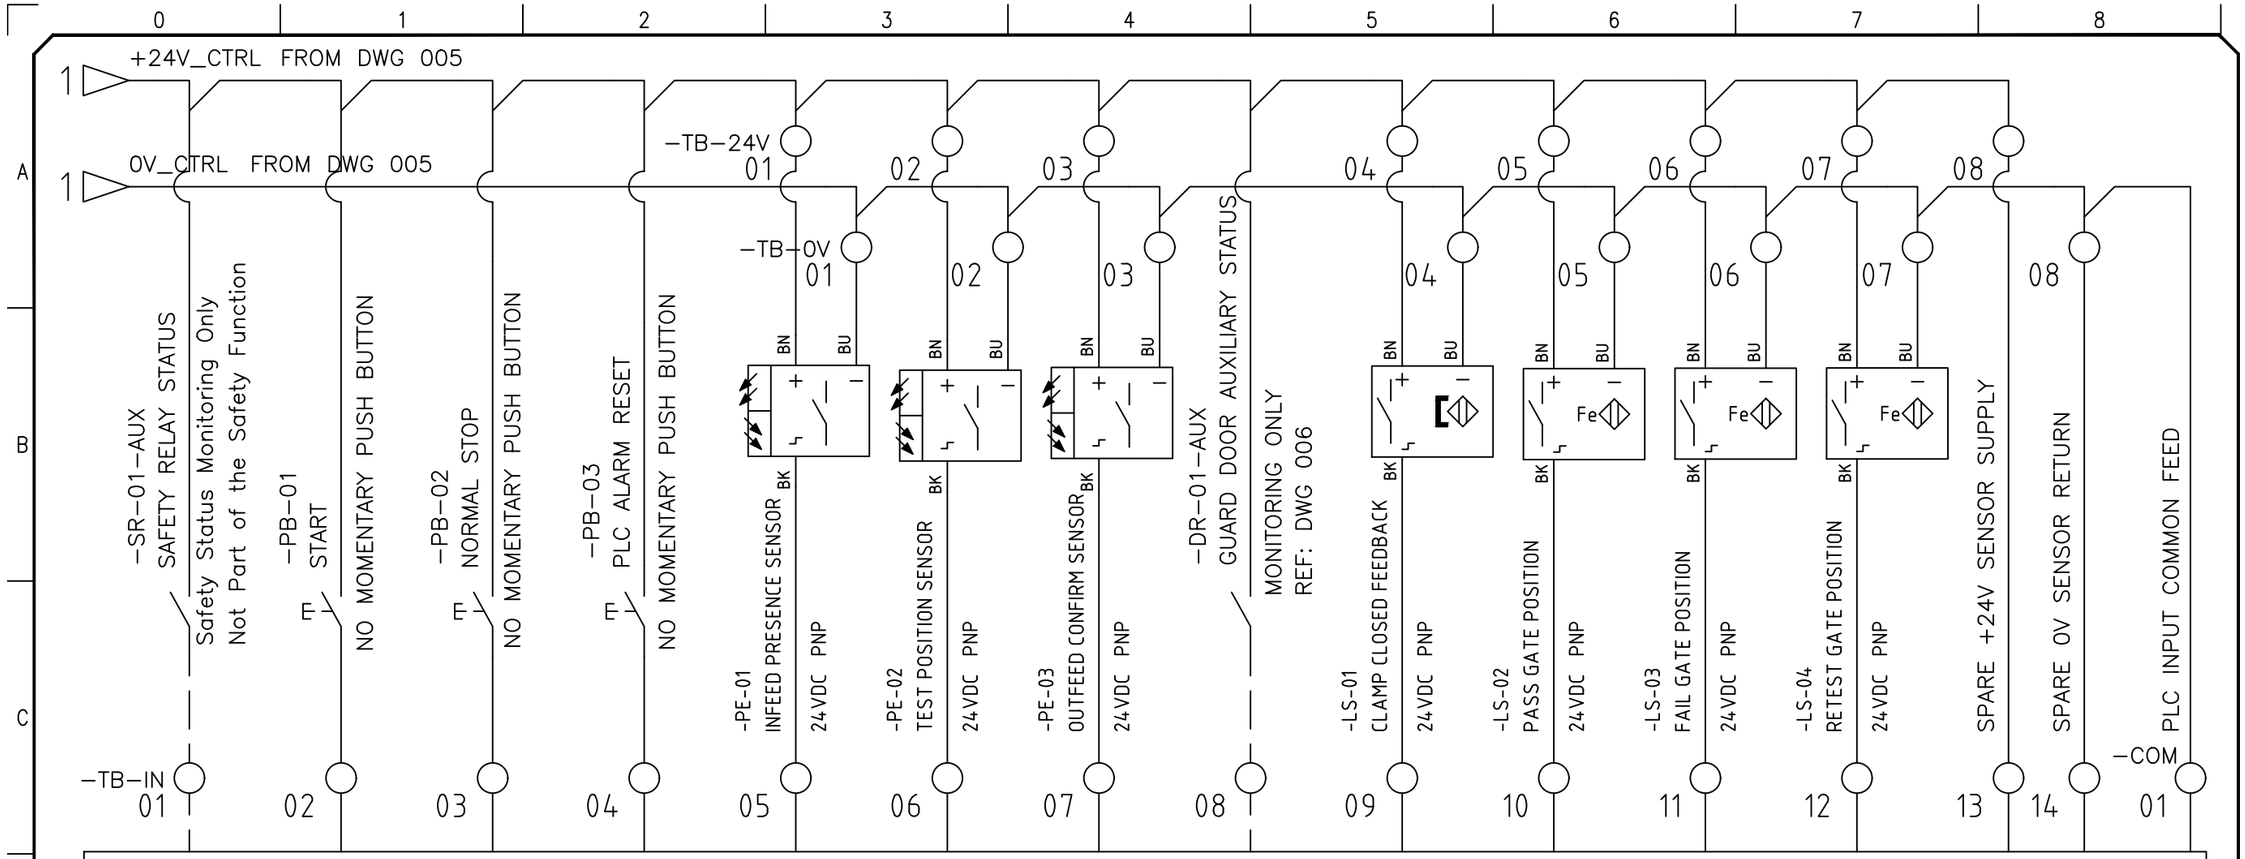



PLC-01
LS XBC-DR32H
DIGITAL INPUT
MODULE
24VDC INPUT

INPUT COMMON:
COM → 0V_CTRL

P00 SR-01-AUX
P01 PB-01 Start
P02 PB-02 Stop
P03 PB-03 Reset
P04 PE-01 Infeed
P05 PE-02 Test Position
P06 PE-03 Outfeed Confirm

P07 DR-01-AUX
P08 LS-01 Clamp Closed
P09 LS-02 PASS Gate Pos.
P0A LS-03 FAIL Gate Pos.
P0B LS-04 RETEST Gate Pos.

P0C ~ P0F: SPARE INPUTS

## Input Circuit Schedule

| PLC Input | Tag | Signal Type | Normal State | Function | Reference |
|---|---|---|---|---|---|
| P00 | SR-01-AUX | Auxiliary NO Contact | ON = Safety Healthy | Safety chain monitor | DWG 006 |
| P01 | PB-01 | NO Push Button | OFF | Auto start request | Operator Panel |
| P02 | PB-02 | NO Push Button | OFF | Normal stop request | Operator Panel |
| P03 | PB-03 | NO Push Button | OFF | PLC alarm reset | Operator Panel |
| P04 | PE-01 | PNP 24VDC Sensor | OFF | Infeed presence | Field |
| P05 | PE-02 | PNP 24VDC Sensor | OFF | Test position | Field |
| P06 | PE-03 | PNP 24VDC Sensor | OFF | Outfeed confirm | Field |
| P07 | DR-01-AUX | Auxiliary NO Contact | ON = Door Closed | Door monitor only | DWG 006 |
| P08 | LS-01 | PNP 24VDC Sensor | OFF | Clamp closed feedback | Field |
| P09 | LS-02 | PNP 24VDC Sensor | OFF | PASS Gate position | Field |
| P0A | LS-03 | PNP 24VDC Sensor | OFF | FAIL Gate position | Field |
| P0B | LS-04 | PNP 24VDC Sensor | OFF | RETEST Gate position | Field |

[ GENERAL PLC INPUT DESIGN NOTES ]

[1] All process sensors are assumed to be 3-wire PNP, 24VDC devices unless otherwise specified.

[2] PLC input common shall be connected to 0V_CTRL for the PNP sensor wiring standard.

[3] SR-01-AUX and DR-01-AUX are PLC monitoring signals only. They are not part of the hardwired safety function.

[4] ES-01 and DR-01 safety channels are shown in DWG 006 and shall not be routed through normal PLC input circuits.

[5] Field wiring shall terminate at TB-IN before connection to the PLC input terminals.

[6] Final PLC terminal numbers, sensor connector pinout, cable type, and wire size shall be verified using actual device datasheets before fabrication.

[7] PB-03 is PLC alarm reset only. PB-04 safety reset is shown in DWG 006.

[8] DR-01-AUX is not part of the safety function. Safety channels CH1 and CH2 are shown in DWG 006.

| NO. | DATE | REVISION |
|---|---|---|
| A | 2026-08-28 | INITIAL RELEASE |

DWG TITLE
EDS Wafer Map Linked Package
Final Test and Multi-Bin Sorting Cell
PLC Digital Input Circuit

DRAWN BY: J. H. KO
DATE: 2026-08-28
DWG NO: 007
SHEET NO: 1 OF 6