

GENERAL**Operational Hours****ATS Hours / AD ADMIN Hours:** 1200-2300**Airport Information**

RFF: CAT 4
Fuel: Not AVBL
PCN: RWY 05/23: 54/R/C/W/T

DEPARTURE**Take-off Minima**

RWY		05/23	
All ACFT	ft - m/km	0 - 400v	HJ only

Haiti Cap Haitien Cap Haitien Intl.

Cap Haitien Intl. **Cap Haitien** Haiti


2-10

AGC
AFC

AFC

AFC

AGC
AFC

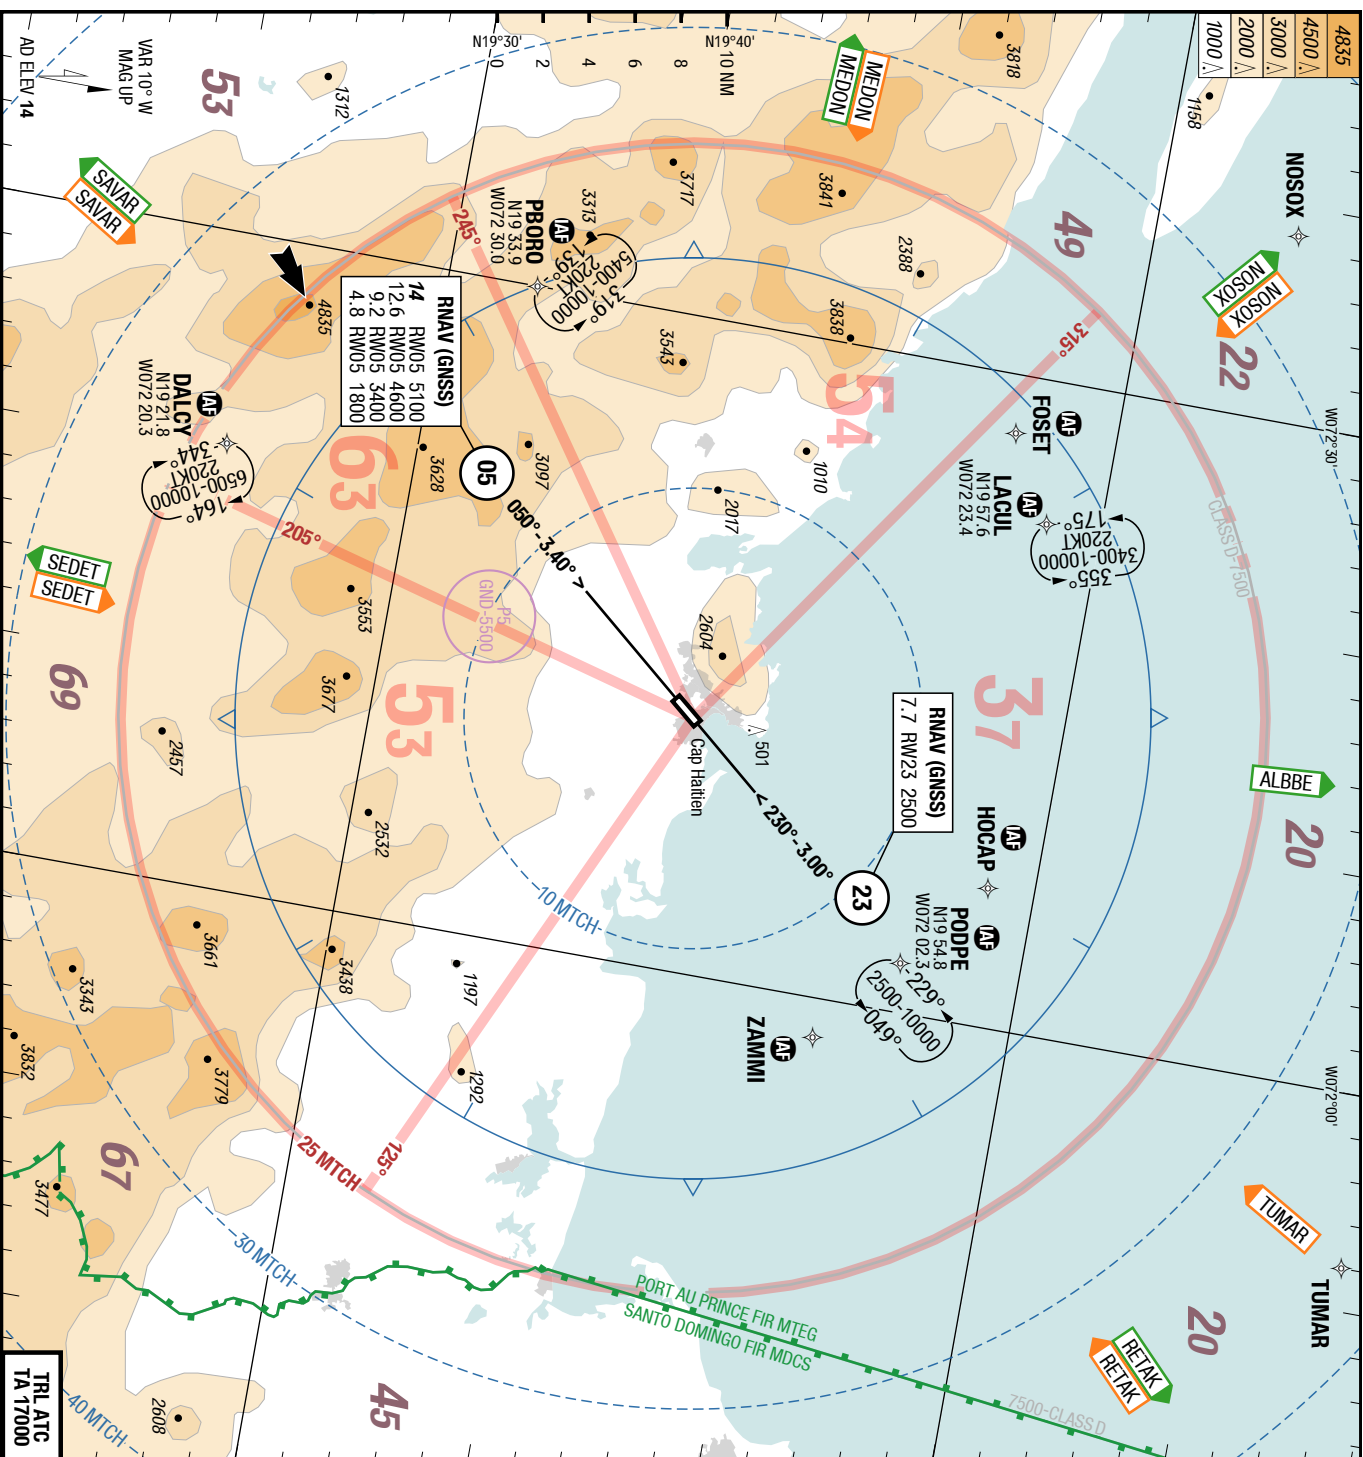

124.500
118.700 1200-2300

225

05

PAPI angle not AVBI

2652 X 45 *****

0.0% $\text{Pa} / \text{TDZ} \dots (\dots\%)$

PAPI angle not AVBL

45 x 2652

(2)

0.0%	TDZ ---
------	---------


IR 10 (OhPa)

19-APR-2018
CAP-MTCH

Haiti Cap Haitien Cap Haitien Intl.
3-20
AGC

AGC

Cap Haitien Intl. Cap Haitien Haiti
AGC

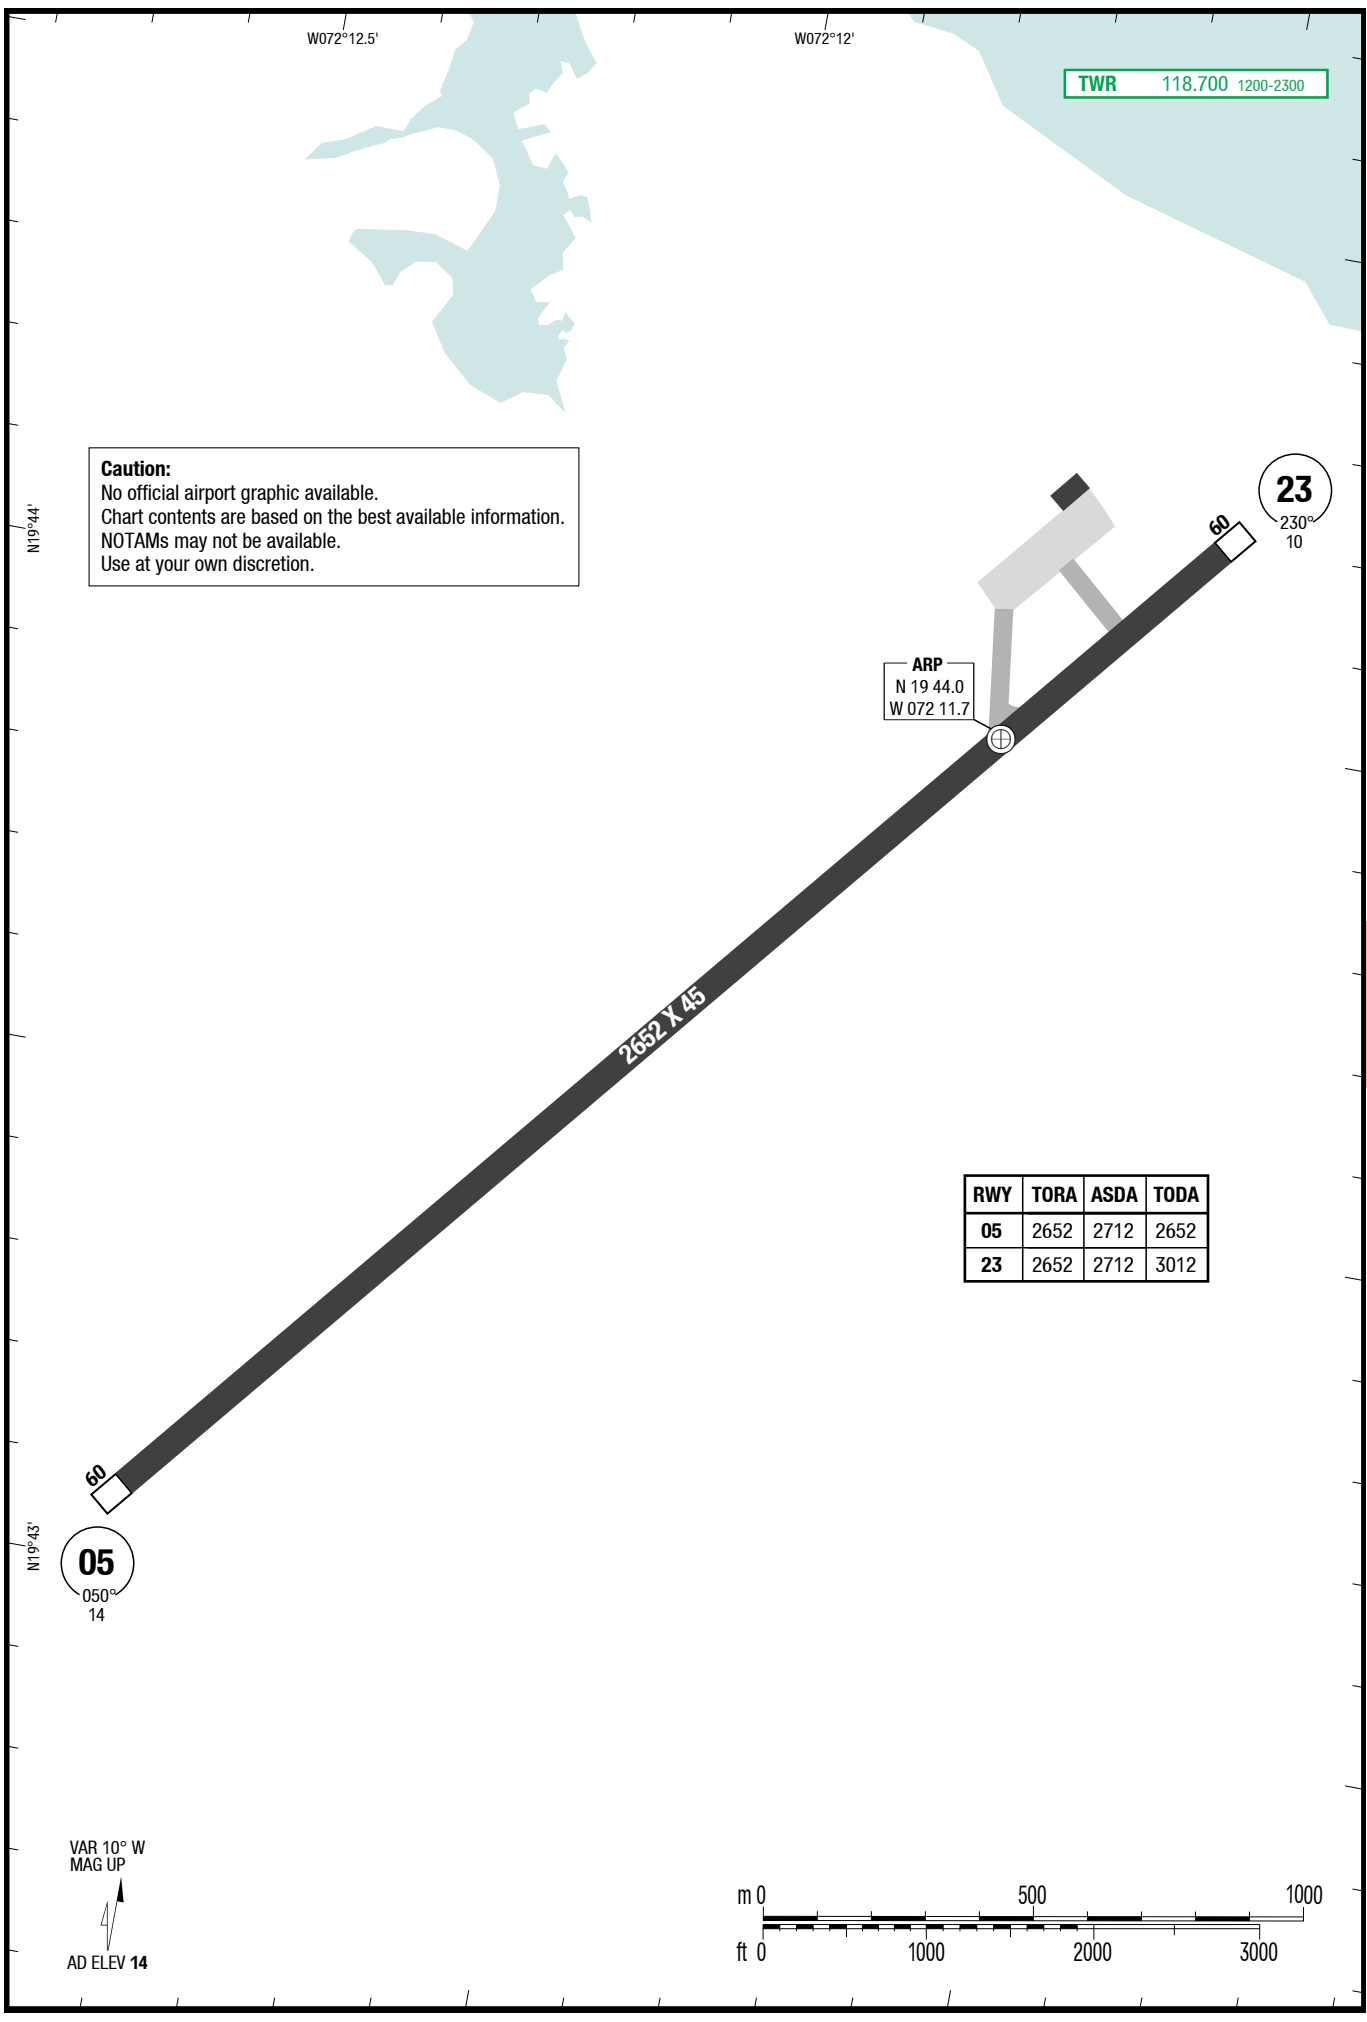

Changes: ASDA, SWY, APN, BLDG

19-APR-2018

CAP-MTCH

Haiti Cap Haitien Cap Haitien Intl.

NIL


SID

SID

Cap Haitien Intl. Cap Haitien Haiti

NIL

RNAV SIDs RWY 05

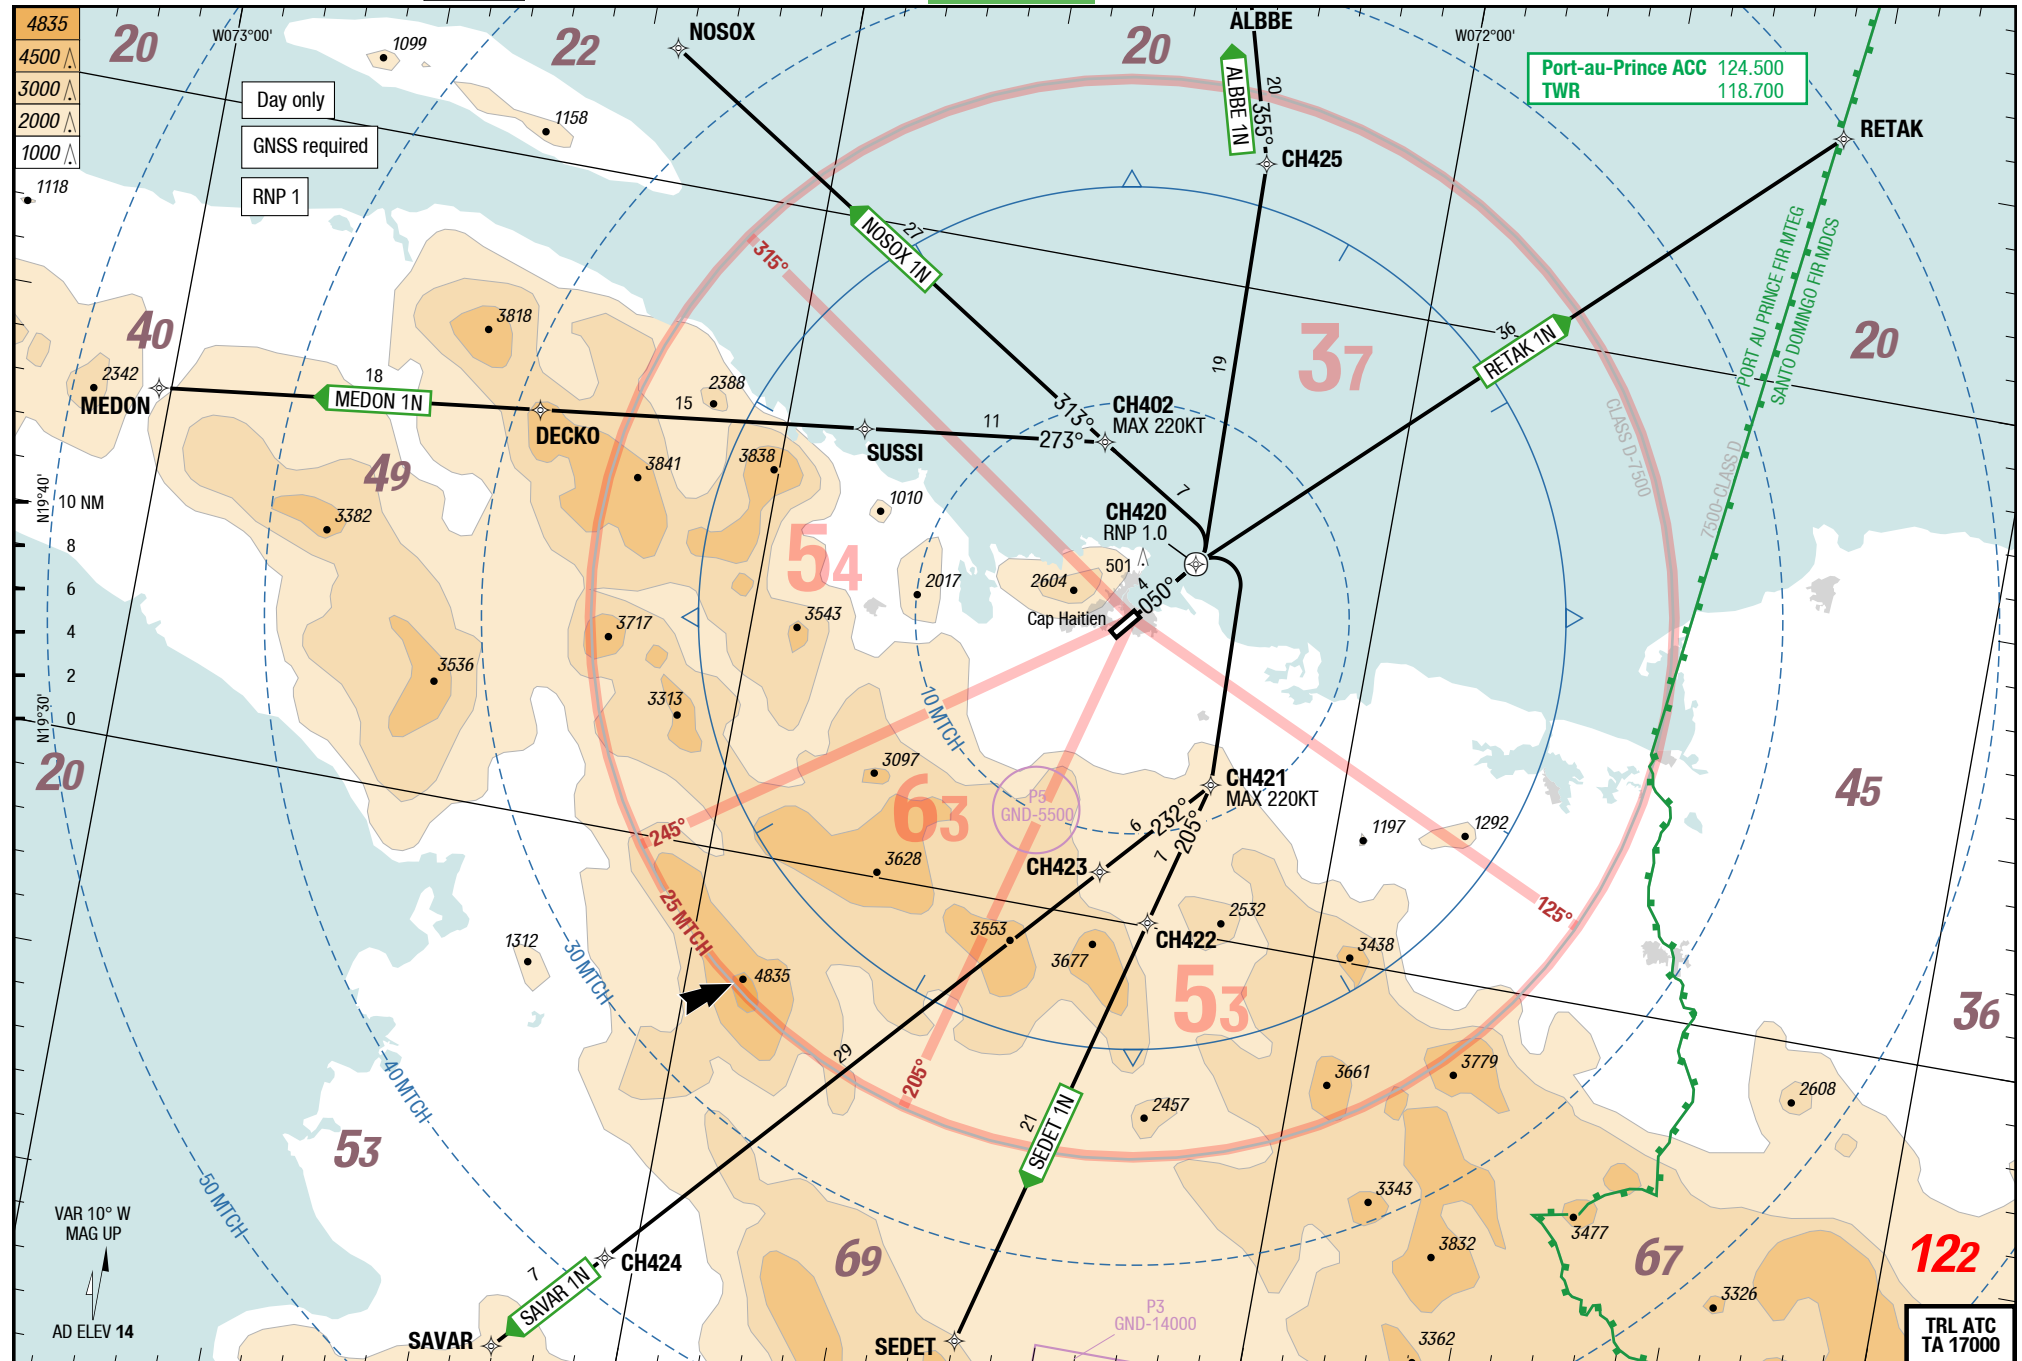

19-APR-2018

CAP-MTCH

5-10

RNAV SIDs RWY 05

ALBBE 1N / MEDON 1N / NOSOX 1N / RETAK 1N / SAVAR 1N / SEDET 1N
 RWY 05 (050°)

	GS	120	150	180	210	240	270
3.8%	ft/MIN	500	600	700	900	1000	1100

DESIGNATOR	ROUTING	ALTITUDES
	Runway 05	
ALBBE 1N 118.700	DCT <u>CH420</u> - DCT CH425 - ALBBE	
MEDON 1N 118.700	DCT <u>CH420</u> - DCT CH402 [K220-] - SUSSI - DECKO - MEDON	
NOSOX 1N 118.700	DCT <u>CH420</u> - DCT CH402 [K220-] - NOSOX	
RETAK 1N 118.700	DCT <u>CH420</u> - RETAK	
SAVAR 1N 3.8% to 5000 118.700	DCT <u>CH420</u> [R] - DCT CH421 [K220-] - CH423 - CH424 - SAVAR	
SEDET 1N 3.8% to 4600 118.700	DCT <u>CH420</u> [R] - DCT CH421 [K220-] - CH422 - SEDET	

19-APR-2018

CAP-MTCH

6-10

RNAV STARs RWY 05


STAR

STAR

Cap Haitien Intl. Cap Haitien Haiti

RNAV STARs RWY 23

RNAV STARs RWY 05

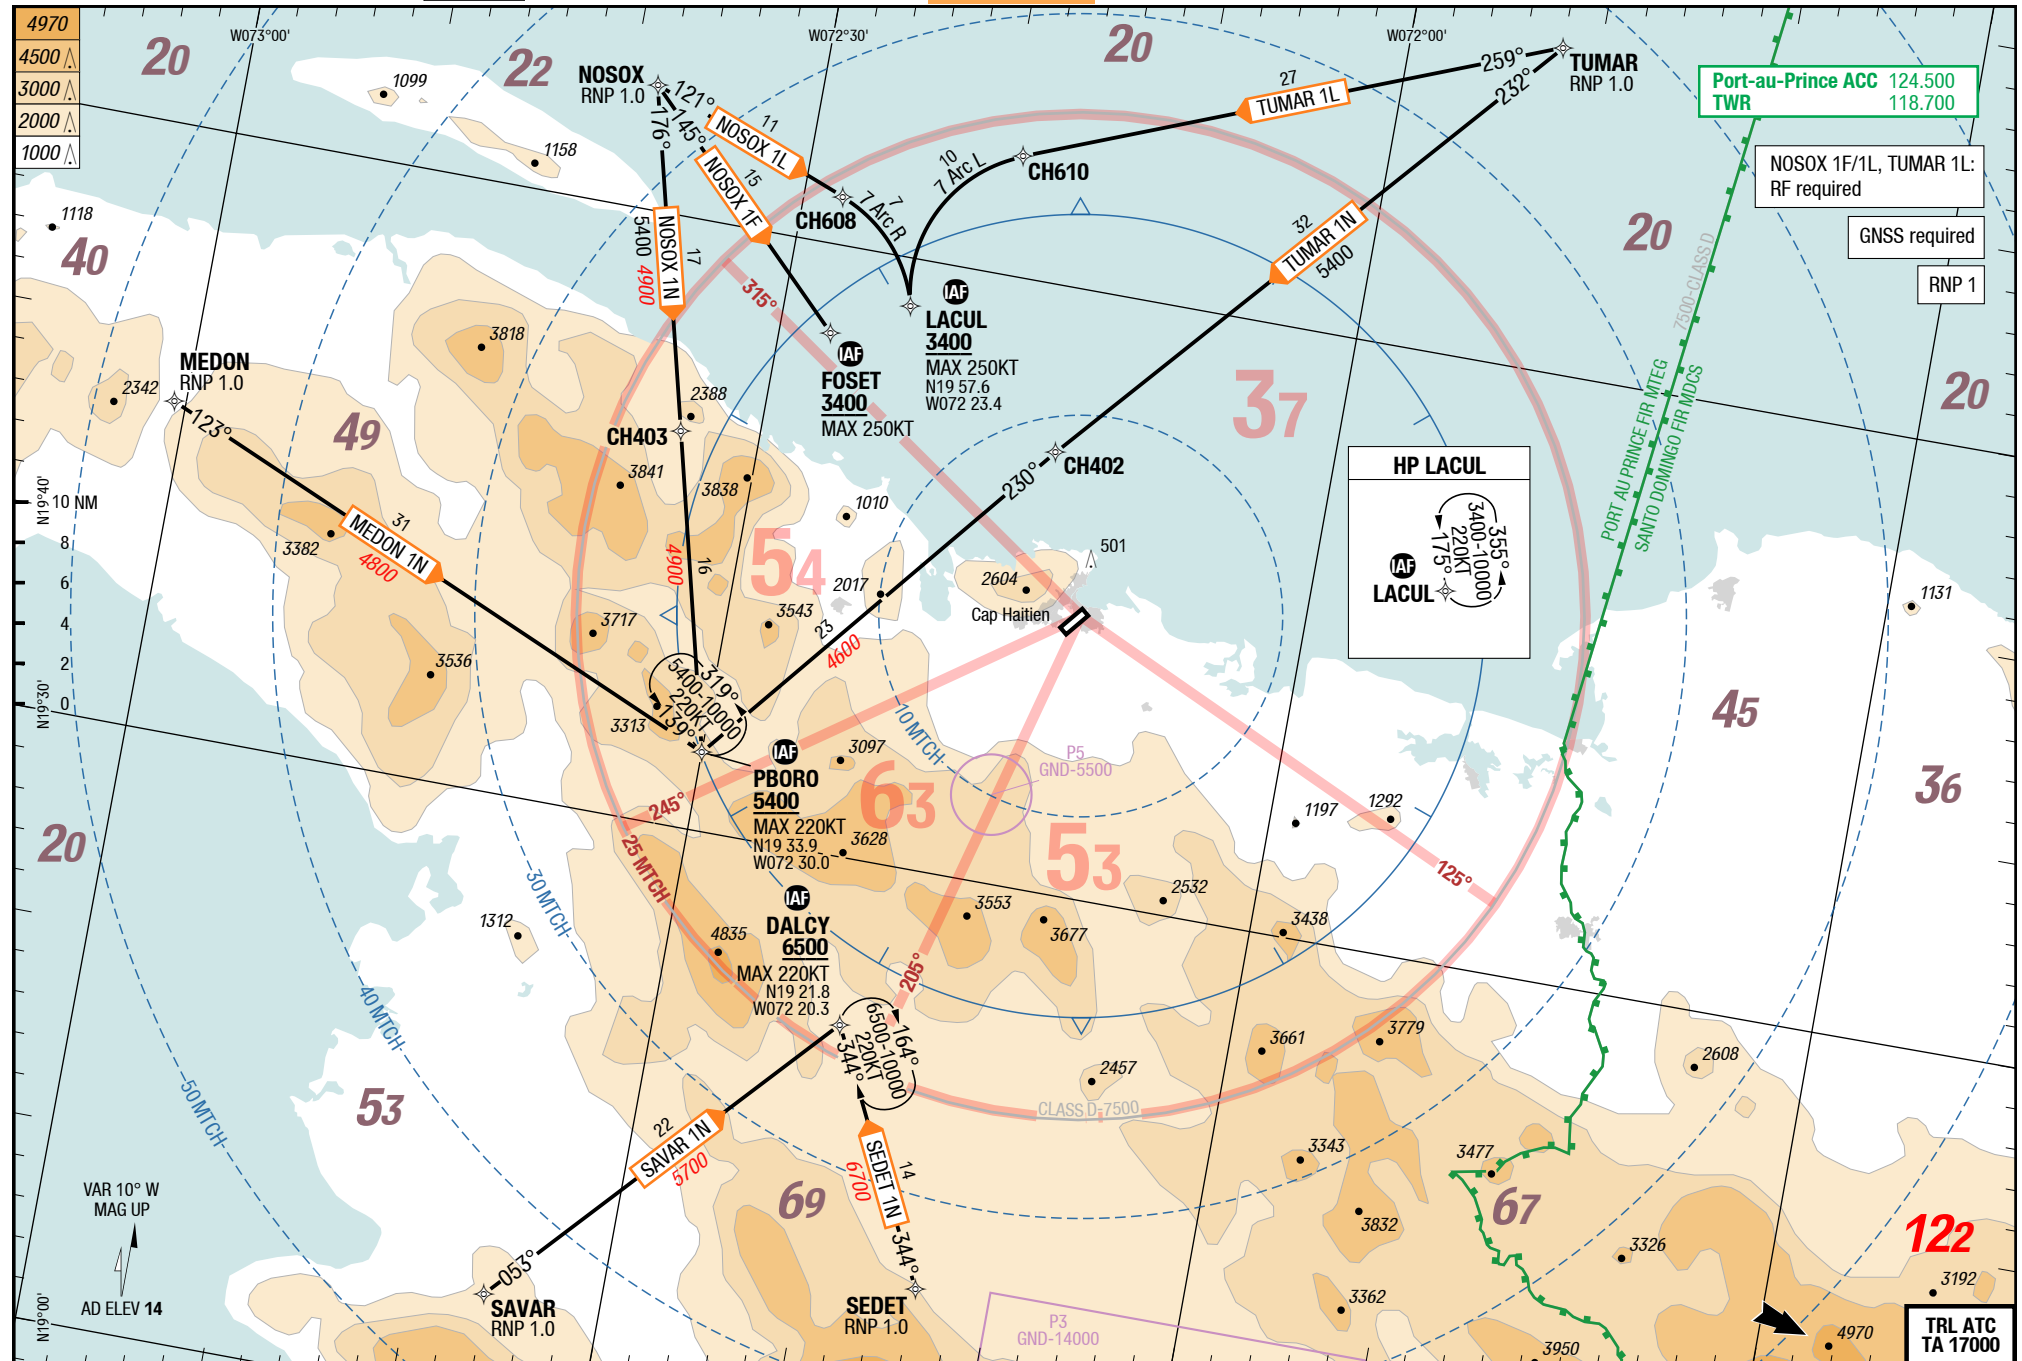

Changes: ASP, OBST, Note, Editorial

CAP-MTCH


6-20

RNAV STARs RWY 23

STAR

STAR

RNAV STARs RWY 23

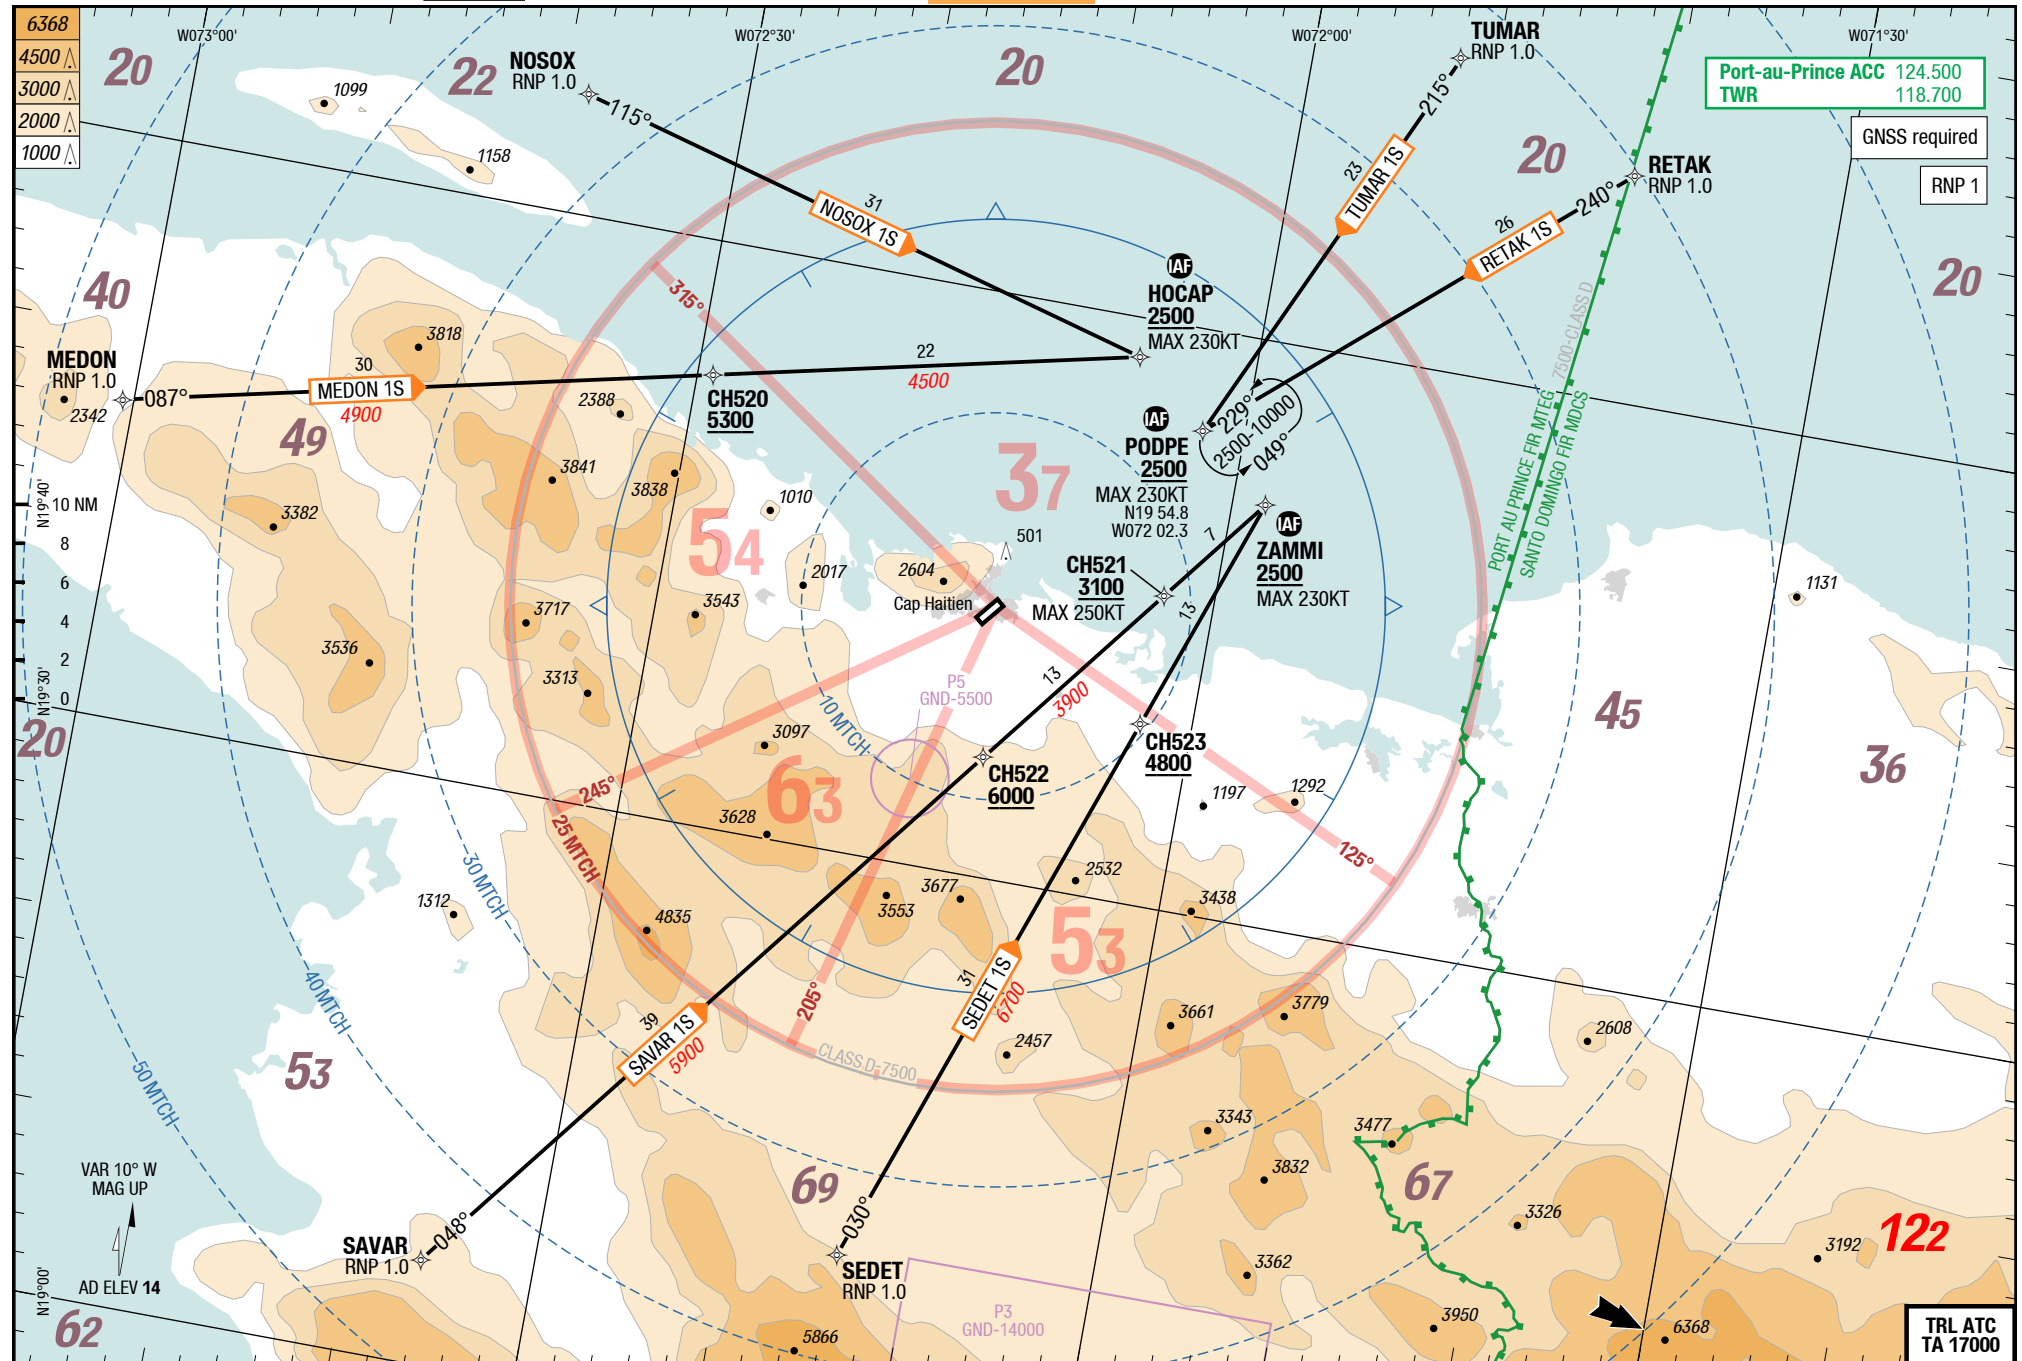

Changes: ASP, OBST, Note

© Lido 2018

CAP-MTCH

NIL


IAC

IAC

NIL

RNAV (RNP) Y 05

7-10

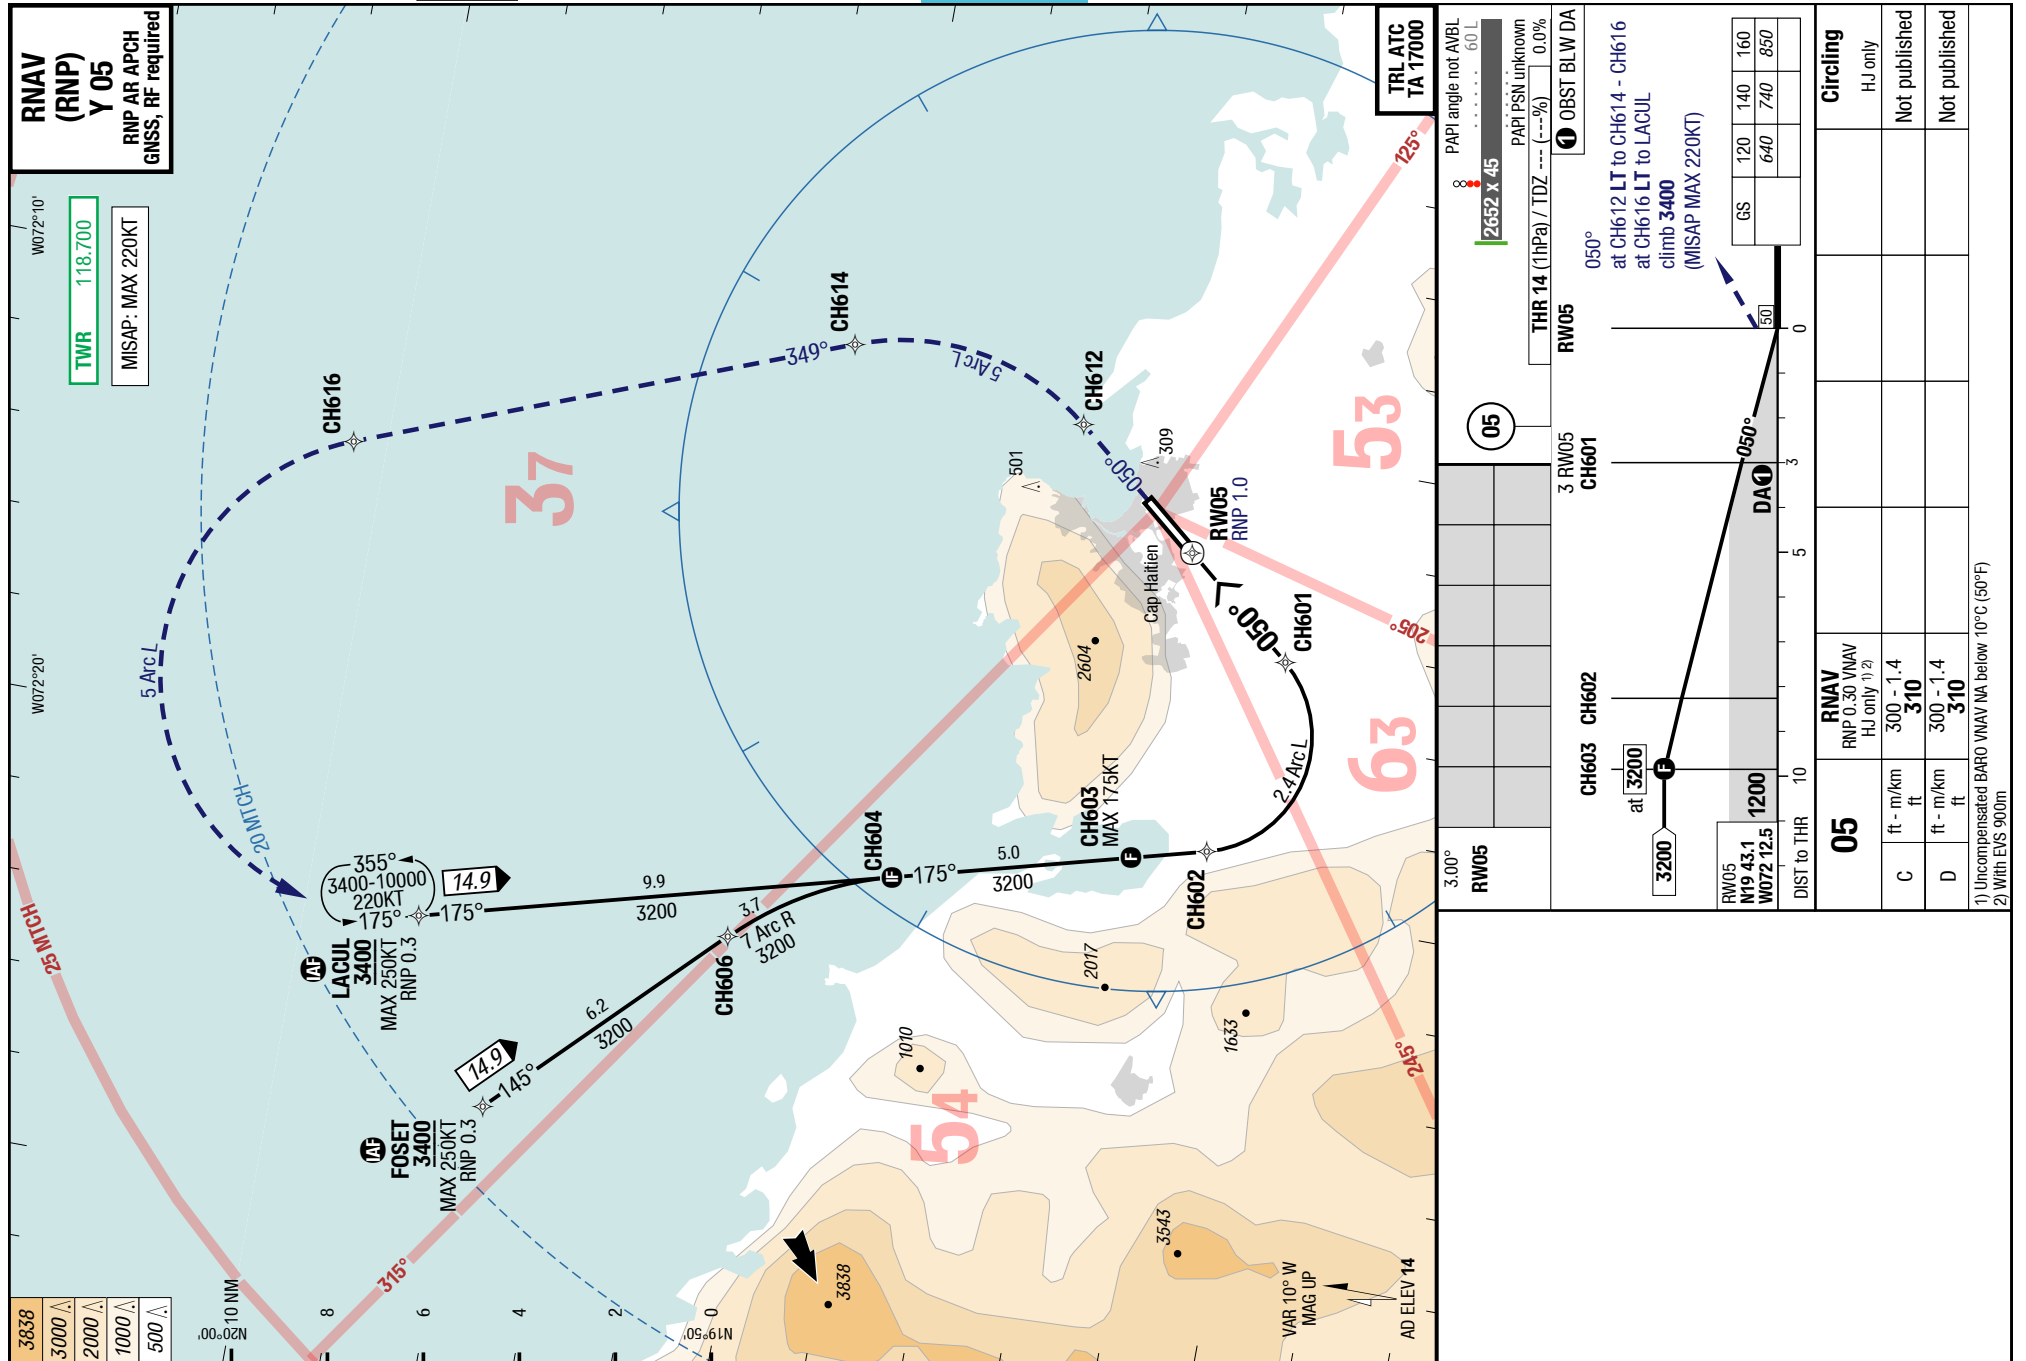

© Lido 2018

Changes: APL, Editorial

CAP-MTCH

RNAV (GNSS) 23

RNAV (GNSS) Z 05


IAC

IAC

RNAV (GNSS) 23

RNAV (GNSS) Z 05

7-30

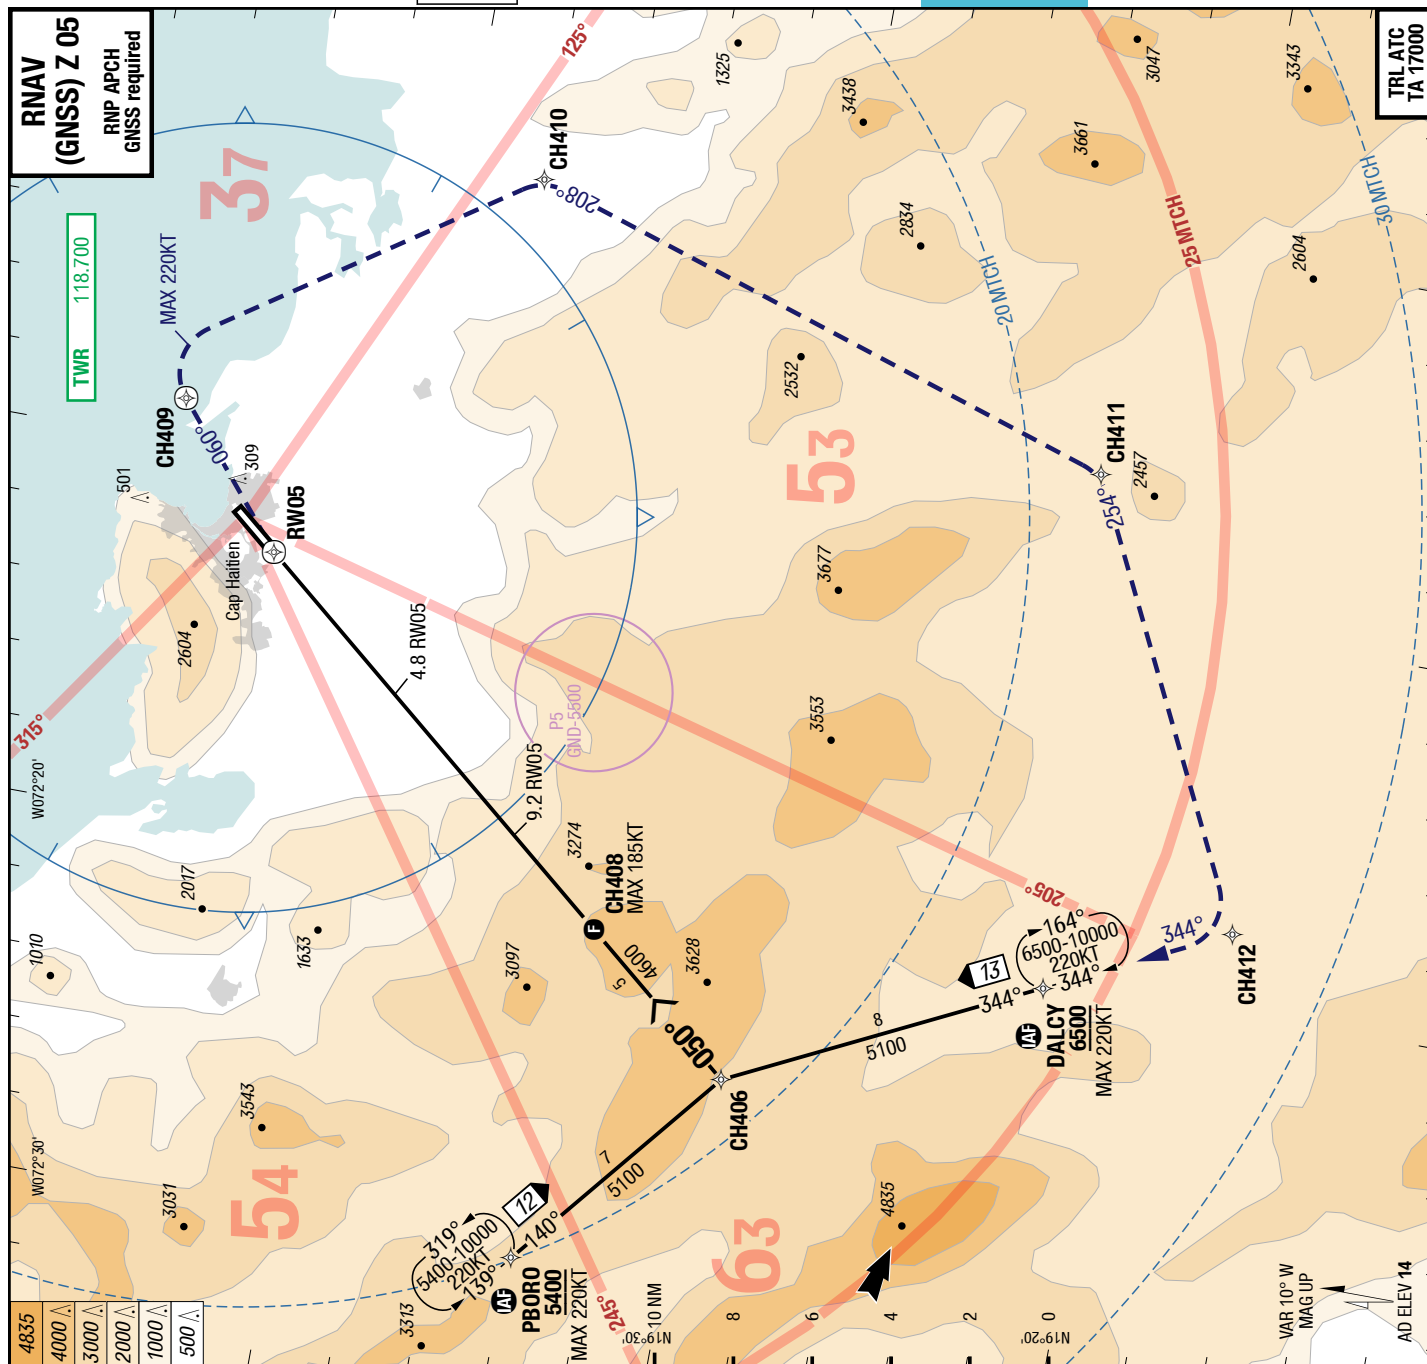[illegible]

1) Uncompensated BARO VNAV NA below 10°C (50°F)

© Lido 2018

Changes: MIN

Haiti Cap Haitien Cap Haitien Intl.

Cap Haitien Intl. **Cap Haitien** Haiti


7-40

RNAV (GNSS) 23

IAC

IAC


RNAV (GNSS) 23

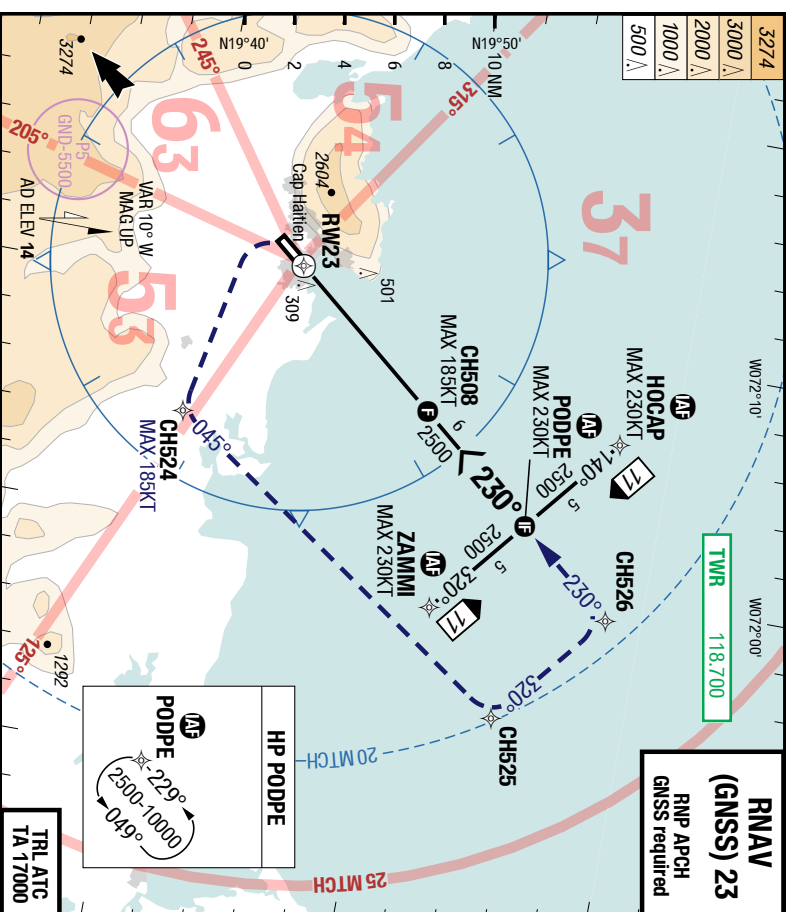

PAP angle not AVBL 60 L							3.00°
45 x 2652	3	4	5	6	7	7.7	RW23
	1020	1340	1660	1970	2290	2500	
PAP PSN unknown	(23)						
TDZ --- (-%) / THR 10 (0hPa)							
0.0%							

1 OBST BLW MDA

LT (MAX 185KT) direct CH524 -
CH525 - CH526 -
PODPE (MAX 230KT)
climb **2500**

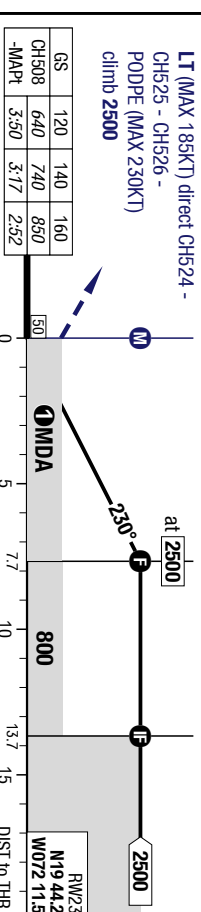[illegible]

1) Uncompensated BARD VNAV NA below -10°C (50°F) 2) With EVS 1.5km 3) SBAS use for VNAV not applicable or not authorized
4) With EVS 1.6km 5) With EVS 1.7km

Changes: MIN

CAP-MTCH**7-50****WxMinima Overflow**

23		RNAV GNSS VNAV GA 2.5% HJ only	RNAV GNSS LNAV GA 3.5% HJ only	RNAV GNSS LNAV GA 3.0% HJ only	RNAV GNSS LNAV GA 2.5% HJ only		
C	ft - m/km ft	660 - 3.0 670 ^{1) 2) 3)}	440 - 2.0 450	540 - 2.4 550	720 - 3.3 730		
D	ft - m/km ft	700 - 3.2 710 ^{1) 3) 4)}	440 - 2.0 450	570 - 2.6 580	750 - 3.5 760		
1) Uncompensated BARO VNAV NA below 10°C (50°F) 2) With EVS 2.0km 3) SBAS use for VNAV not applicable or not authorized 4) With EVS 2.1km							