

GENERAL**Operational Hours****ATS Hours:** 1100-0300±**AD OPS Hours:** 1000-0100±**Airport Information**

RFF: FAA Index C / CAT 7
OPS in excess of 15min before or after scheduled ARR/DEP times only authorized after coordination with AD, FAA Index D / CAT 8 48HRs PPR.

Fuel: Jet A**PCN:** RWY 01/19: 43/F/B/X/U**Operation****Traffic Note**

RWY and APCH lights are turned off when TWR CLSD, thereafter activation by CTAF.

48HR PPR for non-SKED ACFT with more than 30 PAX seats.

Warnings**SAW VOR** unusable: R330-090 beyond 10NM below 8000ft.

Birds and deers in vicinity of AD.

EMERG FREQ: 121.500 not AVBL on TWR**ARRIVAL****Speed**

MAX IAS 250KT below 10000ft.

Communication**COM Failure:** See CRAR.**DEPARTURE****Take-off Minima**

RWY		01/19	
1+2 ENG	ft - ft/SM	0 - 1.0V	-
3+4 ENG		0 - 0.5V	-

Speed

MAX IAS 250KT below 10000ft.

Communication**COM Failure:** See CRAR.


Sawyer Intl **Marquette** United States

AFC




000

007



AWOS-3	118.375
Sawyer TWR	119.975 1100-0300±
CTAF	119.975 ARCAL
GND	121.650
Unicom	122.700

Cautions:
Be alert to runway crossing clearances.
Readback of all runway holding instructions is required.

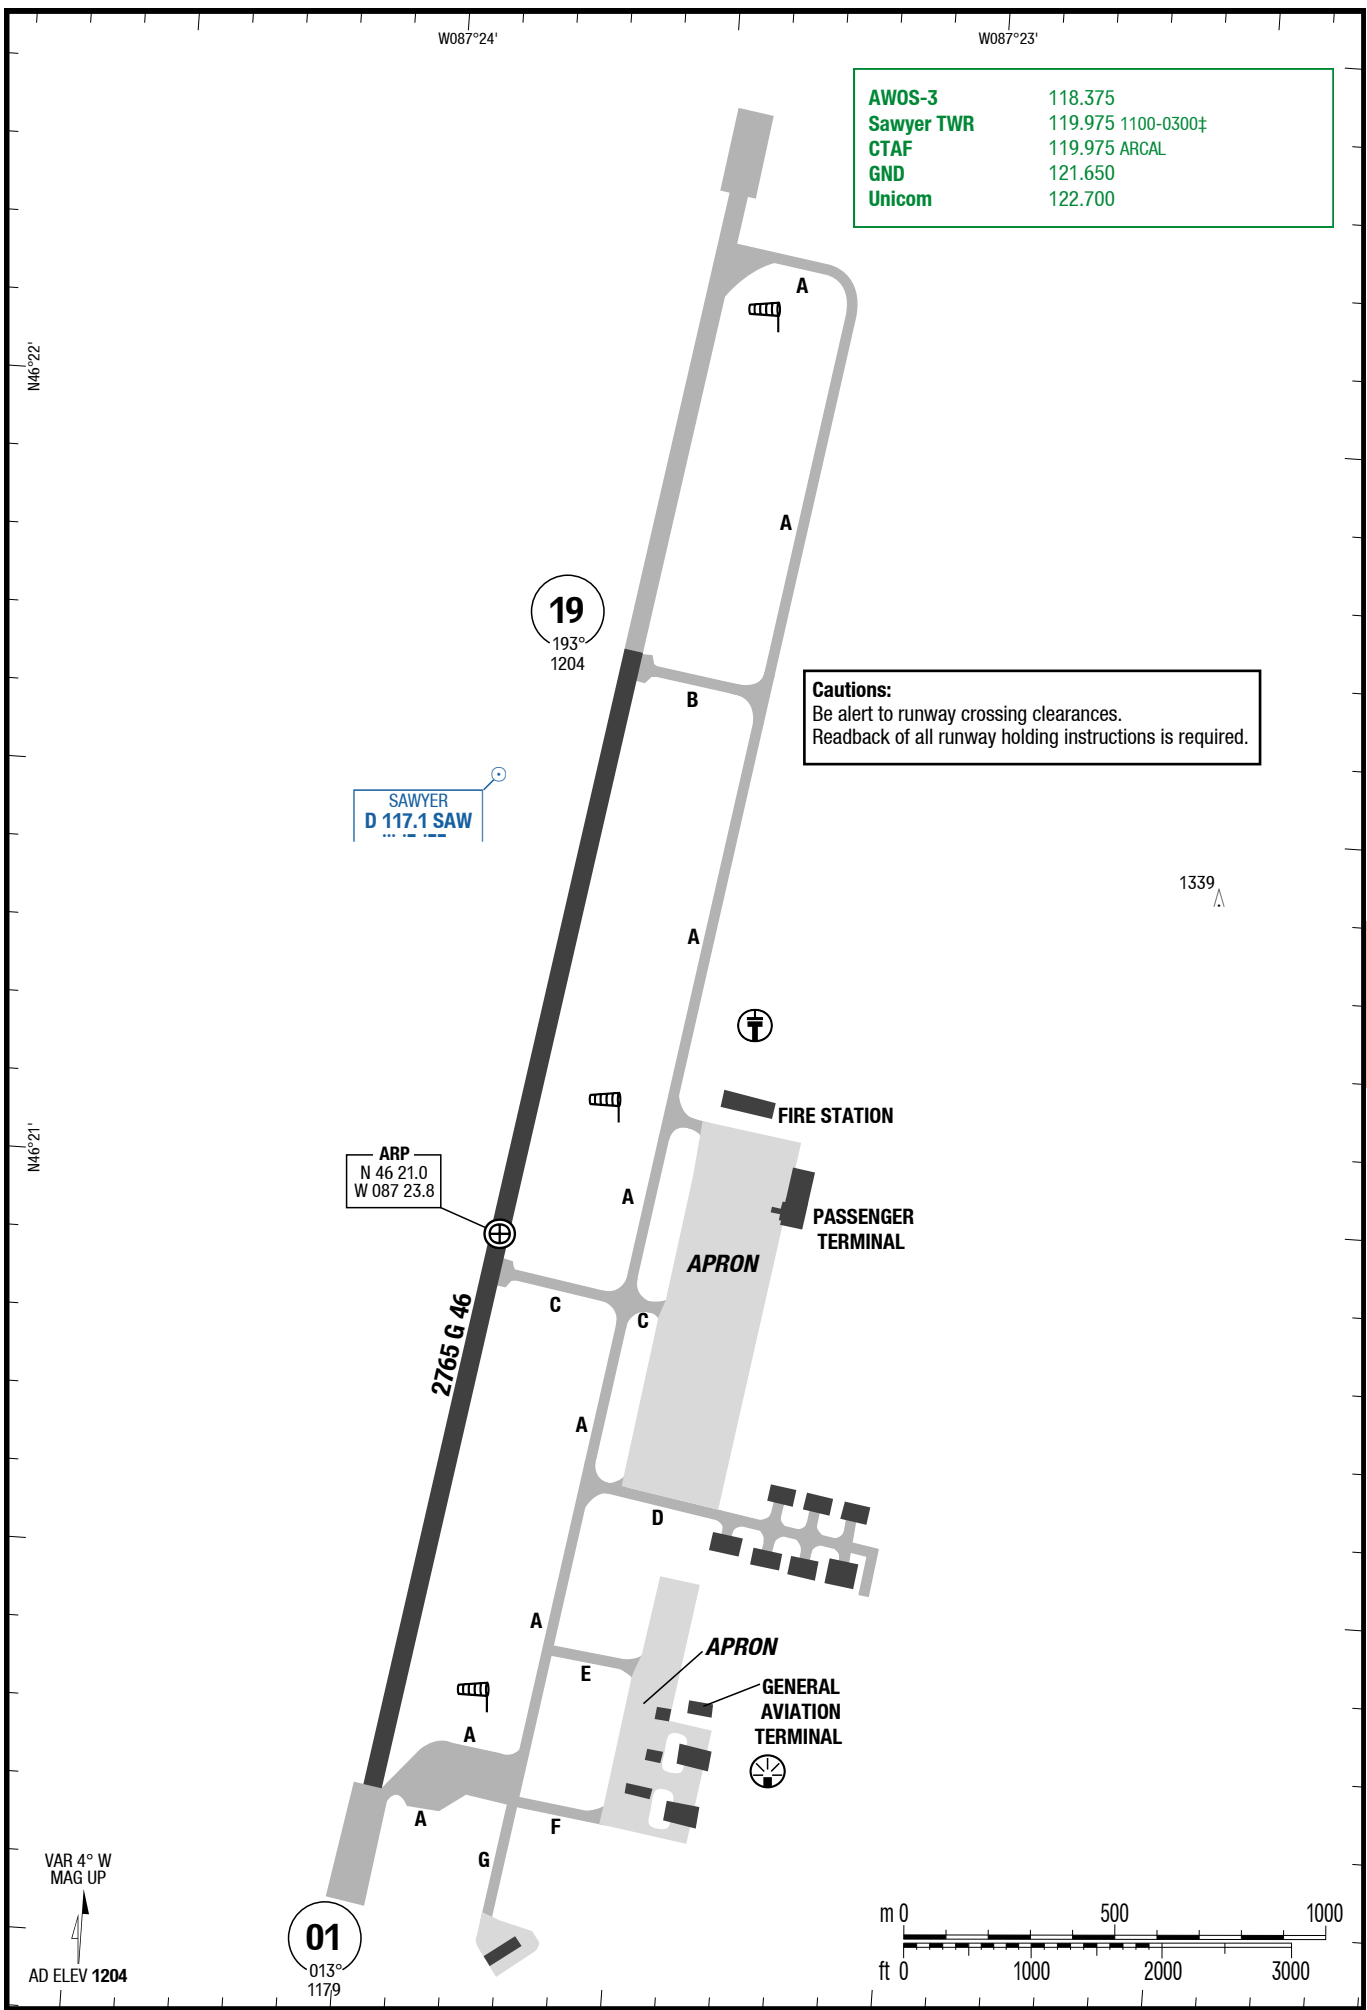

Changes: THR ELEV, RWY, AD ELEV

10-JUN-2010

United States **Marquette** Sawyer Intl

MQT-KSAW

5-10

Obstacle Departure

SIDPT

Obstacle Departure


RWY	Notes
19	Trees beginning 2582ft from DER, left and right of centerline, up to 100ft AGL / 1269ft MSL.

Changes: New

MQT-KSAW

7-10


ILS or LOC 01

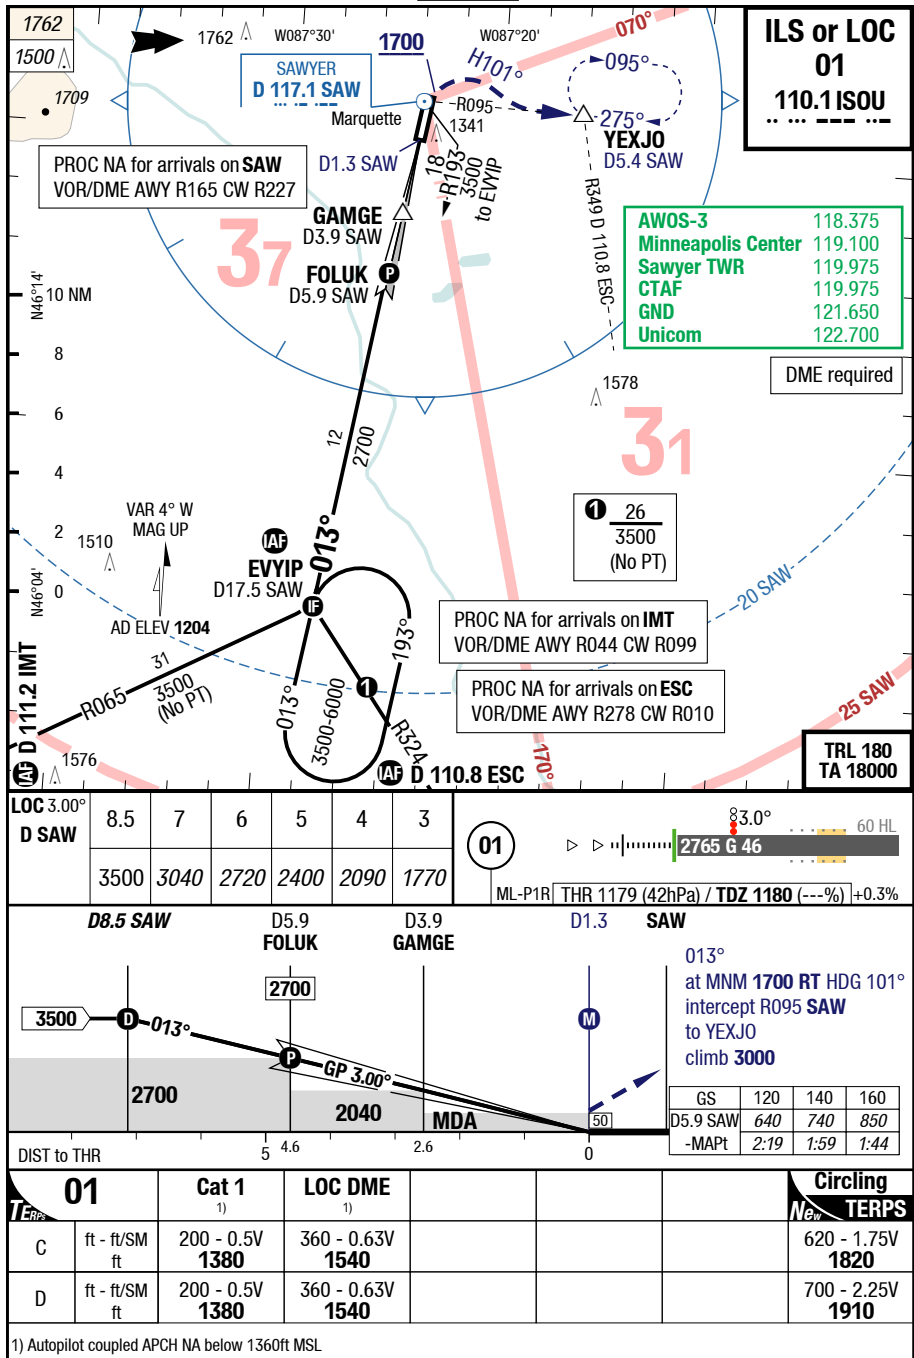

MQT-KSAW

7-30


RNAV (GPS) 01

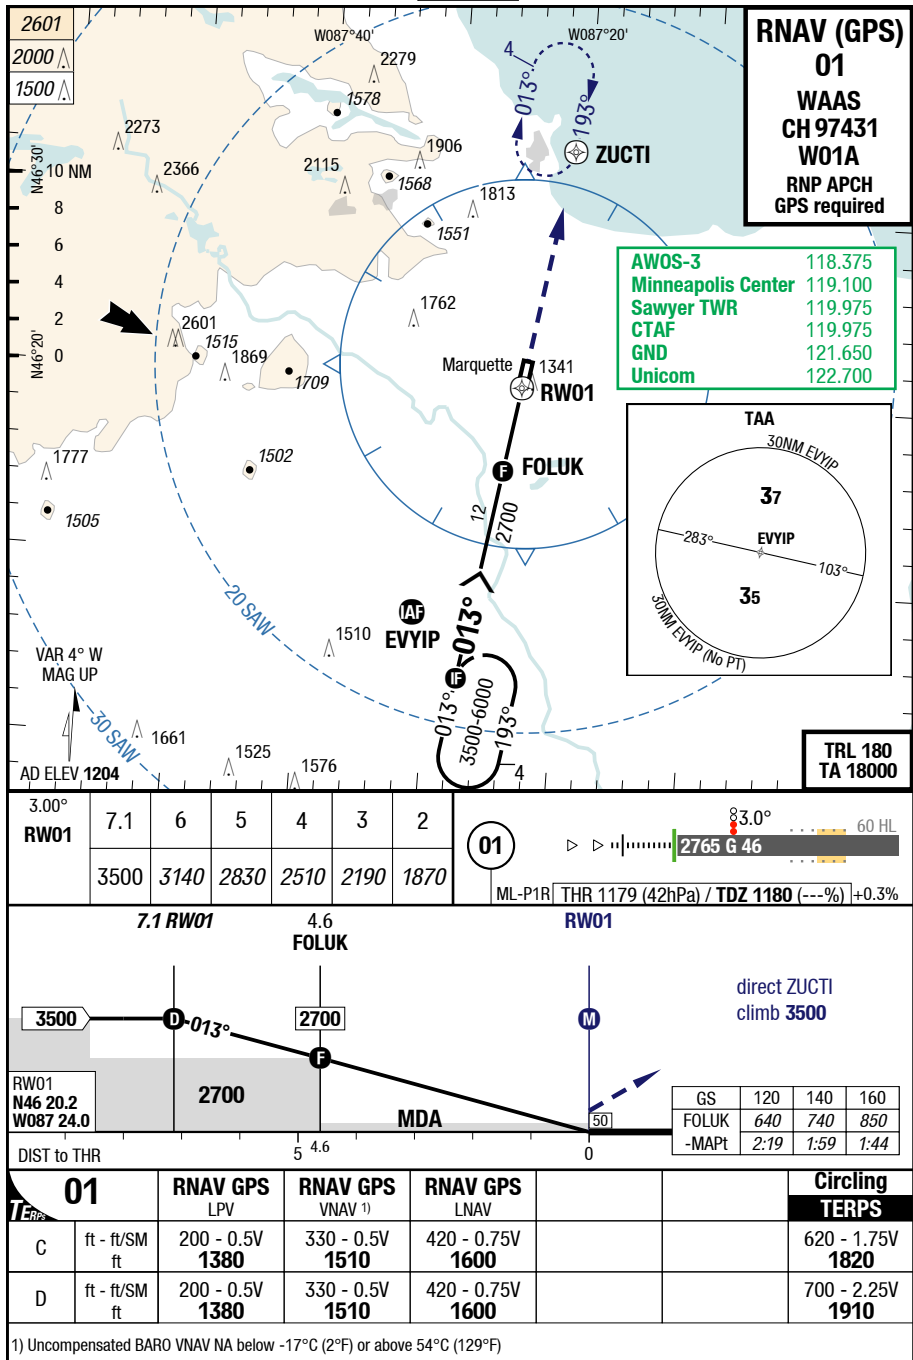


MQT-KSAW

7-40

RNAV (GPS) 19

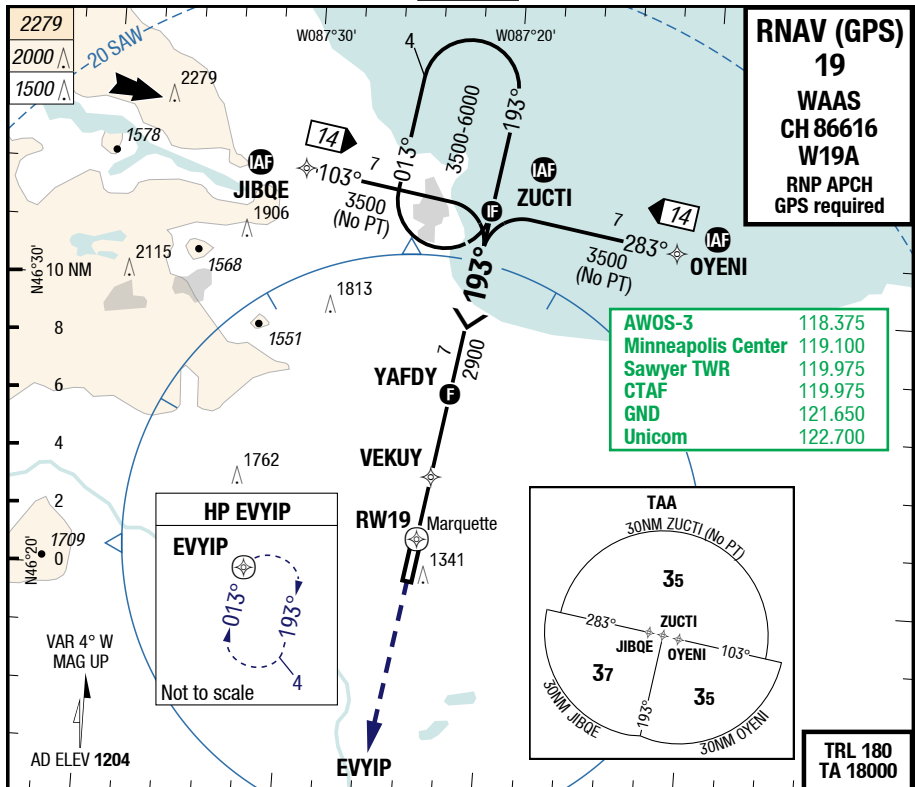

60 HL	46 G 2765	3.0°	19	2	3	4	5	6	7	3.00°
-0.3%	TDZ 1204 (---%) / THR 1204 (43hPa)			1900	2220	2540	2860	3180	3500	RW19

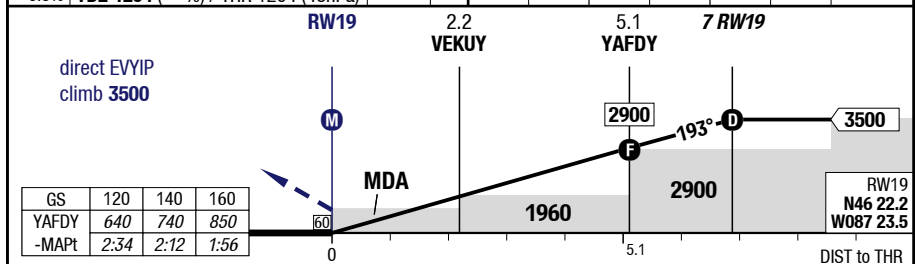


19		RNAV GPS LPV	RNAV GPS VNAV 1)	RNAV GPS LNAV			Circling TERPS
C	ft - ft/SM ft	200 - 0.75V 1410	320 - 0.88V 1530	420 - 1.25V 1620			620 - 1.75V 1820
D	ft - ft/SM ft	200 - 0.75V 1410	320 - 0.88V 1530	420 - 1.25V 1620			700 - 2.25V 1910

1) Uncompensated BARO VNAV NA below -17°C (2°F) or above 54°C (129°F)

MQT-KSAW

7-50

VOR 19

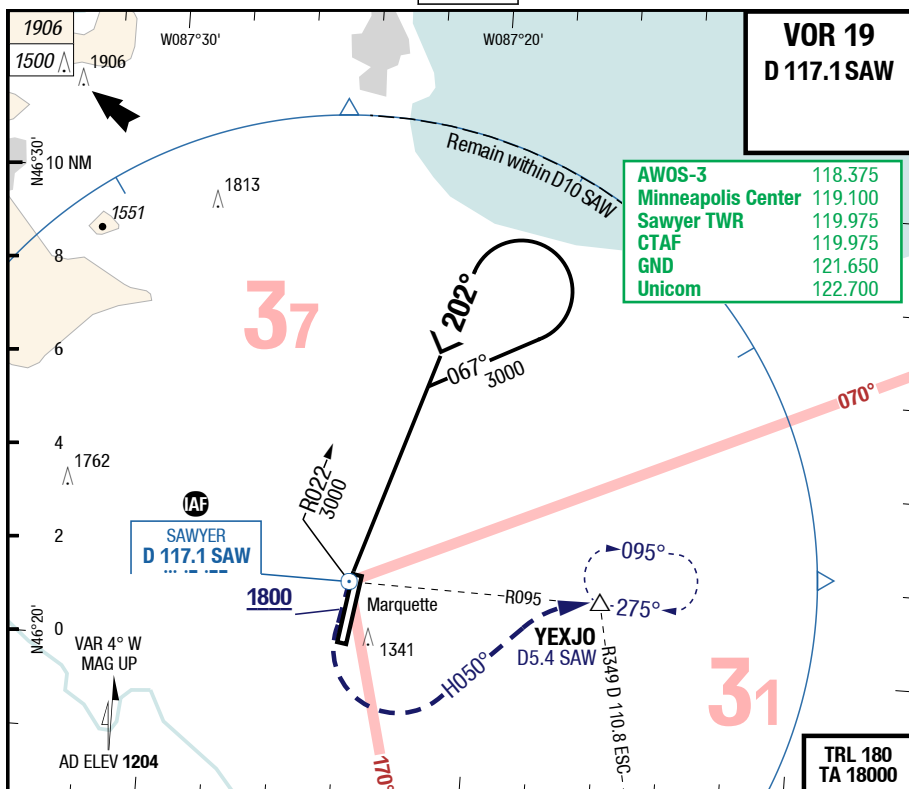

19		VOR		Circling	
TERPS		TERPS		TERPS	
C	ft - ft/SM	580 - 1.75V	1780	620 - 1.75V	1820
D	ft - ft/SM	580 - 1.75V	1780	700 - 2.25V	1910