

GENERAL			
ATS Hours			
H24			
Airport Information			
RFF:	Not published		
Fuel:	24HR PN for non-SKED ACFT		
PCN:	RWY 06/24: 30/F/D/1350 (196PSI) /T		
Customs:	Not published		
Operation			
Transponder Operation For details on Transponder Mode S see CRAR Australia.			
TWY Restrictions TWY A width 18m / 59ft. TWY C, D width 15m / 49ft. TWY B AVBL up to code letter D ACFT. TWY A AVBL up to code letter C ACFT. TWY C, D AVBL up to code letter B ACFT.			
Parking ACFT above 5.7t / 12500lbs must contact AD OPS for parking instructions,			
Warnings			
Birds in vicinity of AD.			
ARRIVAL			
Communication			
COM Failure: See CRAR Australia.			
Arrival Procedure			
Noise Abatement Procedure: See CRAR Australia.			
DEPARTURE			
Take-off Minima			
RWY		06/24	
Multi ENG	ft - m/km	0 - 800V	-
other		c300 - 2.0V	-
Communication			
COM Failure: See CRAR Australia			
Departure Procedure			
Noise Abatement Procedure: See CRAR Australia.			


EMD-YEML

AGC
AFC

AFC

AFC

AGC
AFC

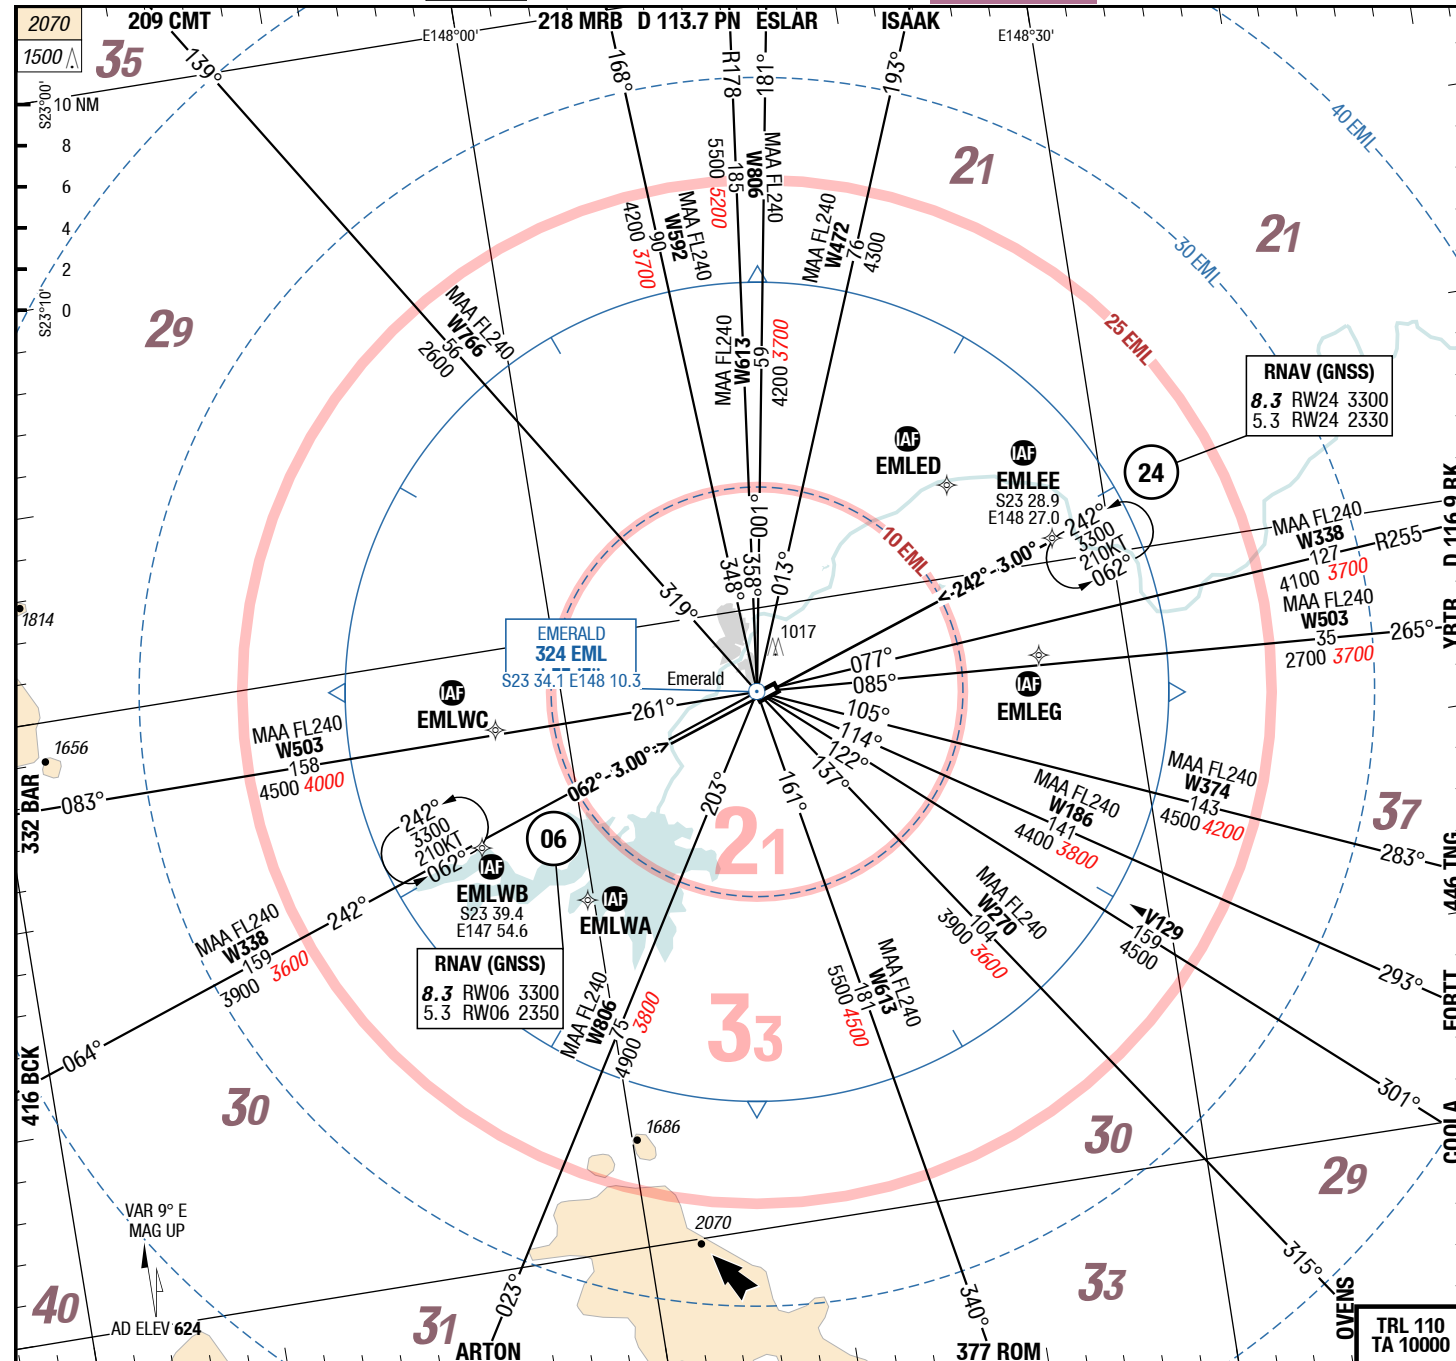

Landing RWY system:

06

83.0°
1900 x 30
620 / 22hPa TDZ ---% -0.2%

L 30 x 1900
.....
+0.2% TDZ ---% 3.0° 605 /

24

RNAV (GNSS)	
8.3	RW24 3300
5.3	RW24 2330

TRL 110
TA 10000

22-OCT-2015
EMD-YEML

Australia **Emerald**
AGC


AGC

AGC

Emerald Australia
AGC

3-20

AWIS	132.950	
Brisbane Center	122.300	On ground
CTAF	126.700	
ARCAL	120.600	ARCAL PAL

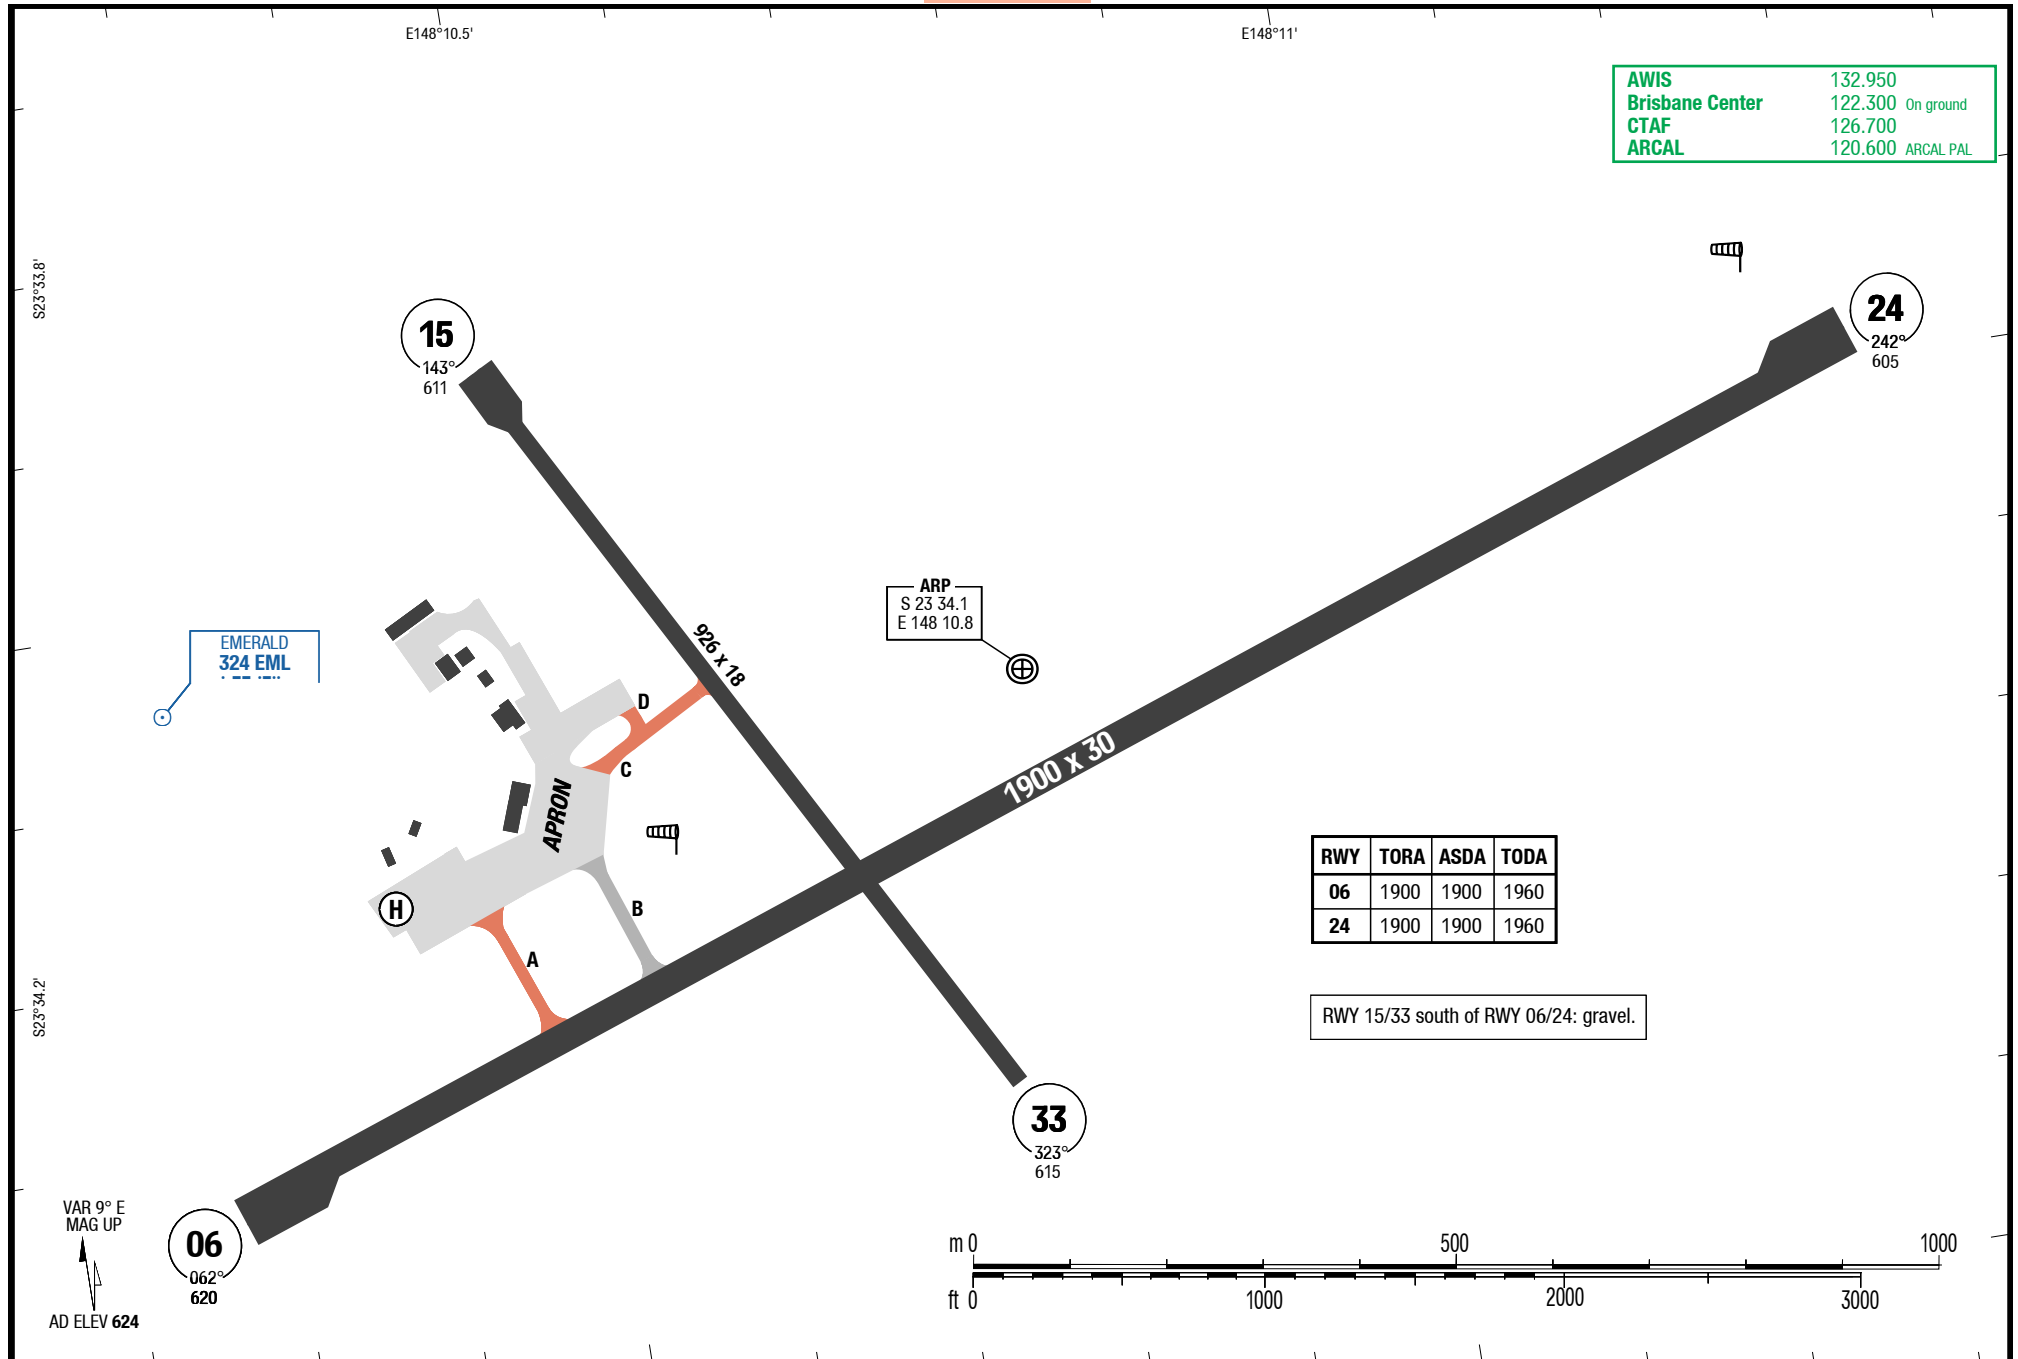

Changes: FREQ, TWY A, B, C, D


22-OCT-2015
EMD-YEML

Australia Emerald

IAC

7-10

RNAV (GNSS) Z 06

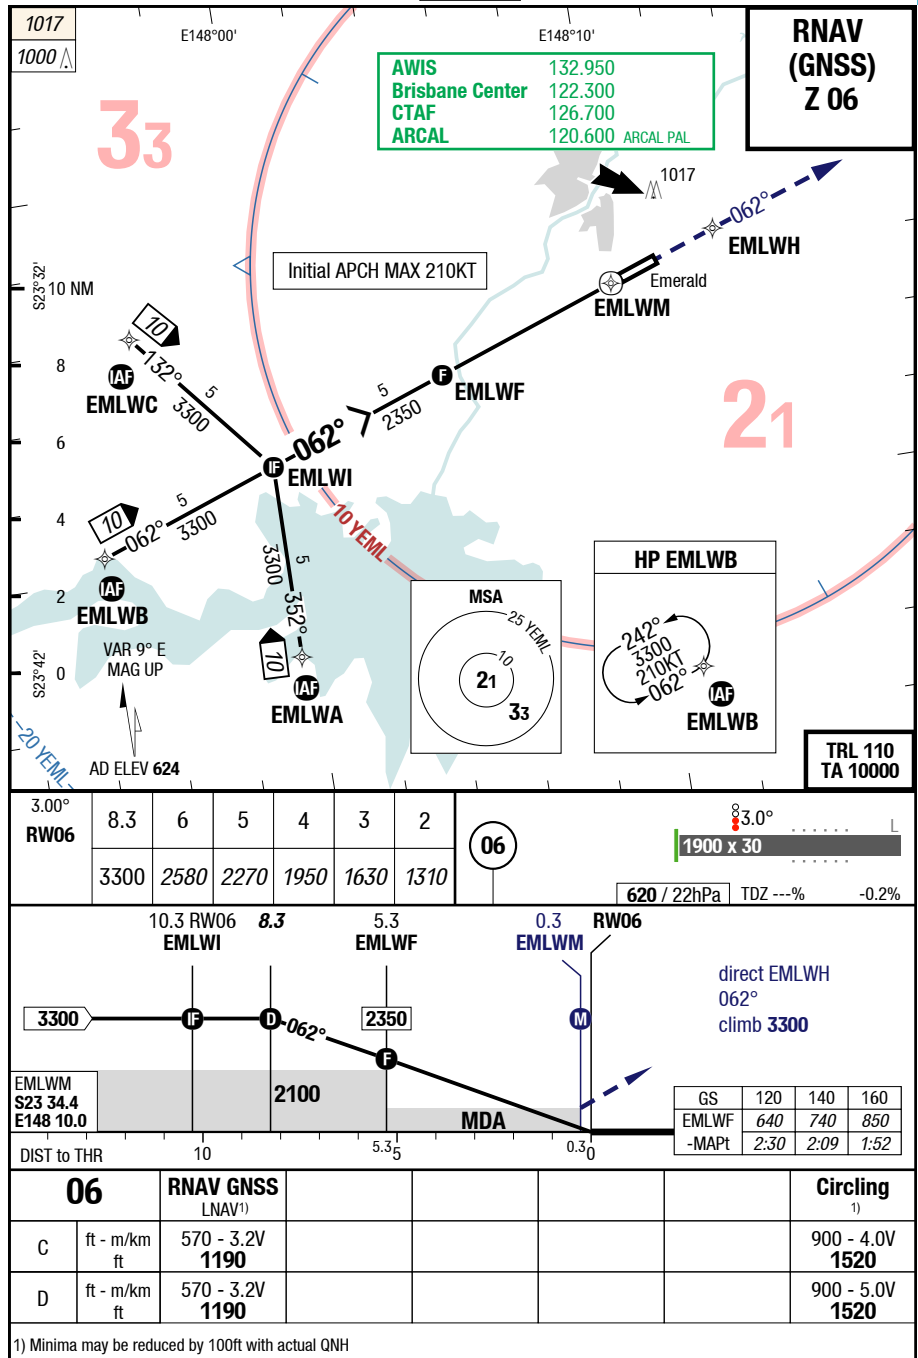



Changes: new

22-OCT-2015
EMD-YEML

7-20

Australia Emerald
RNAV (GNSS) Z 24

IAC

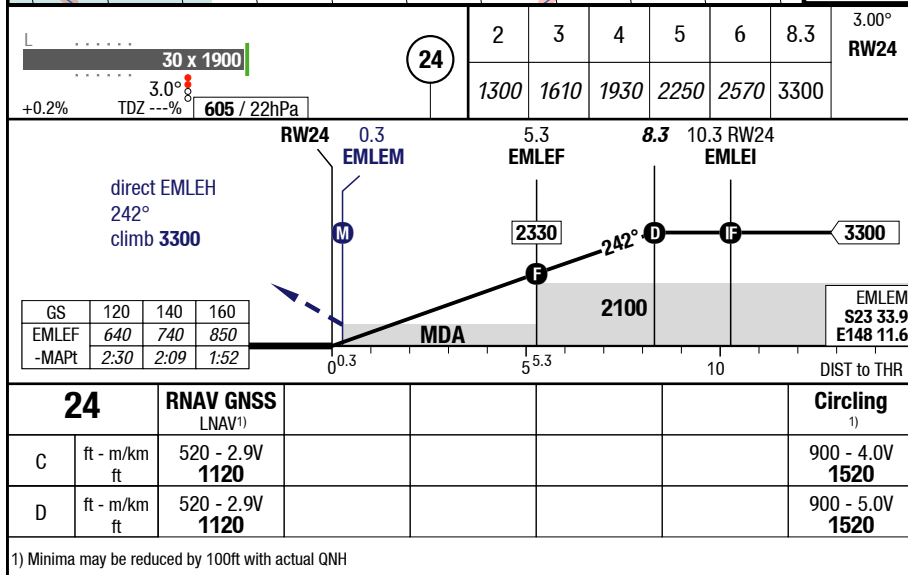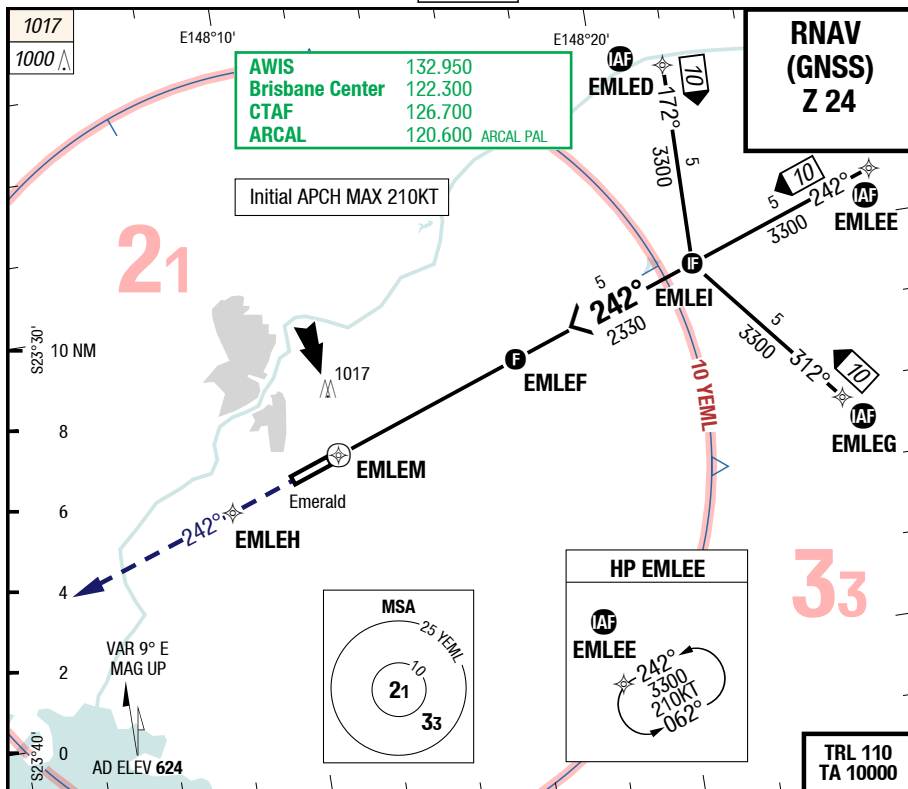

1) Minima may be reduced by 100ft with actual QNH

Changes: new


22-OCT-2015
EMD-YEML

Australia Emerald

IAC

7-30

NDB 24

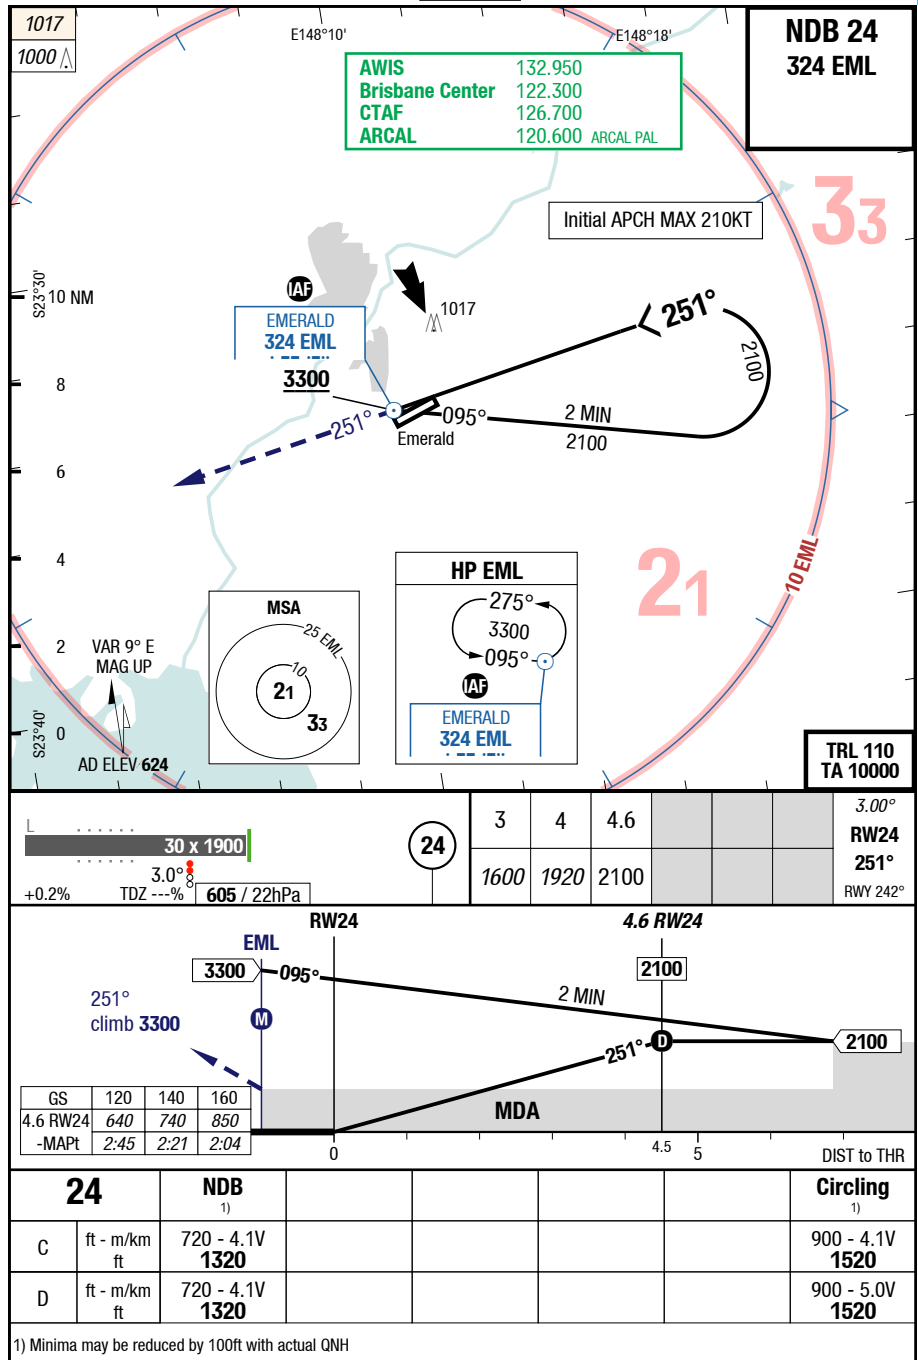

Changes: new