

GENERAL

Operational Hours

ATS Hours

MON-SAT 0600-2000‡

SUN, HOL from:

01 APR-30 SEP 0900-1700‡

01 OCT-31 MAR PPR on the last working day before 1200‡

AD ADMIN Hours: Not published

Airport Information

RFF: CAT 5 MON-FRI

SAT, SUN, HOL O/R on the last working day before 1200‡

Fuel: Not published

PCN: RWY 07/25: 46/F/D/W/T

Customs: MON-FRI O/R before 1200‡

SAT, SUN, HOL O/R on the last working day before 1200‡

Operation

Traffic Note

AD not AVBL to 4 ENG ACFT.

Low Visibility Procedures

LVP in force when RVR is below 800m.

Only 1 ACFT is allowed on the movement area when RVR is between 400m-500m.

RWY is CLSD when RVR is below 400m.

TWY Restriction

TWY B entry to/exit from THR 07 turn at low speed, 10km/h required.

Warnings

Avoid to overfly the surrounding industrial sites.

Wildlife strike hazard.

ARRIVAL

Speed

MAX IAS 250KT below FL100.

Communication

COM Failure during MISAP

When the second attempt is also followed by a MISAP, climb to leave TMA at 3000ft AMSL and seek VMC.

DEPARTURE

Take-off Minima

RWY		25	
All ACFT	ft - m/km	0 - 400R/400V	-
RWY		07	
All ACFT	ft - m/km	0 - 400V	-

DEPARTURE**Speed**

MAX IAS 250KT below FL100.

Communication**COM Failure**

In VMC: Turn back to land on AD.

In IMC: Continue the flight until TMA limits at last assigned FL or at first safety FL, then proceed climbing to cruising LVL as stated in the flight plan in force.

De-Icing

Not published

SNR-LFRZ


AFC

AFC

AFC

AFC

Montoir **St Nazaire** France

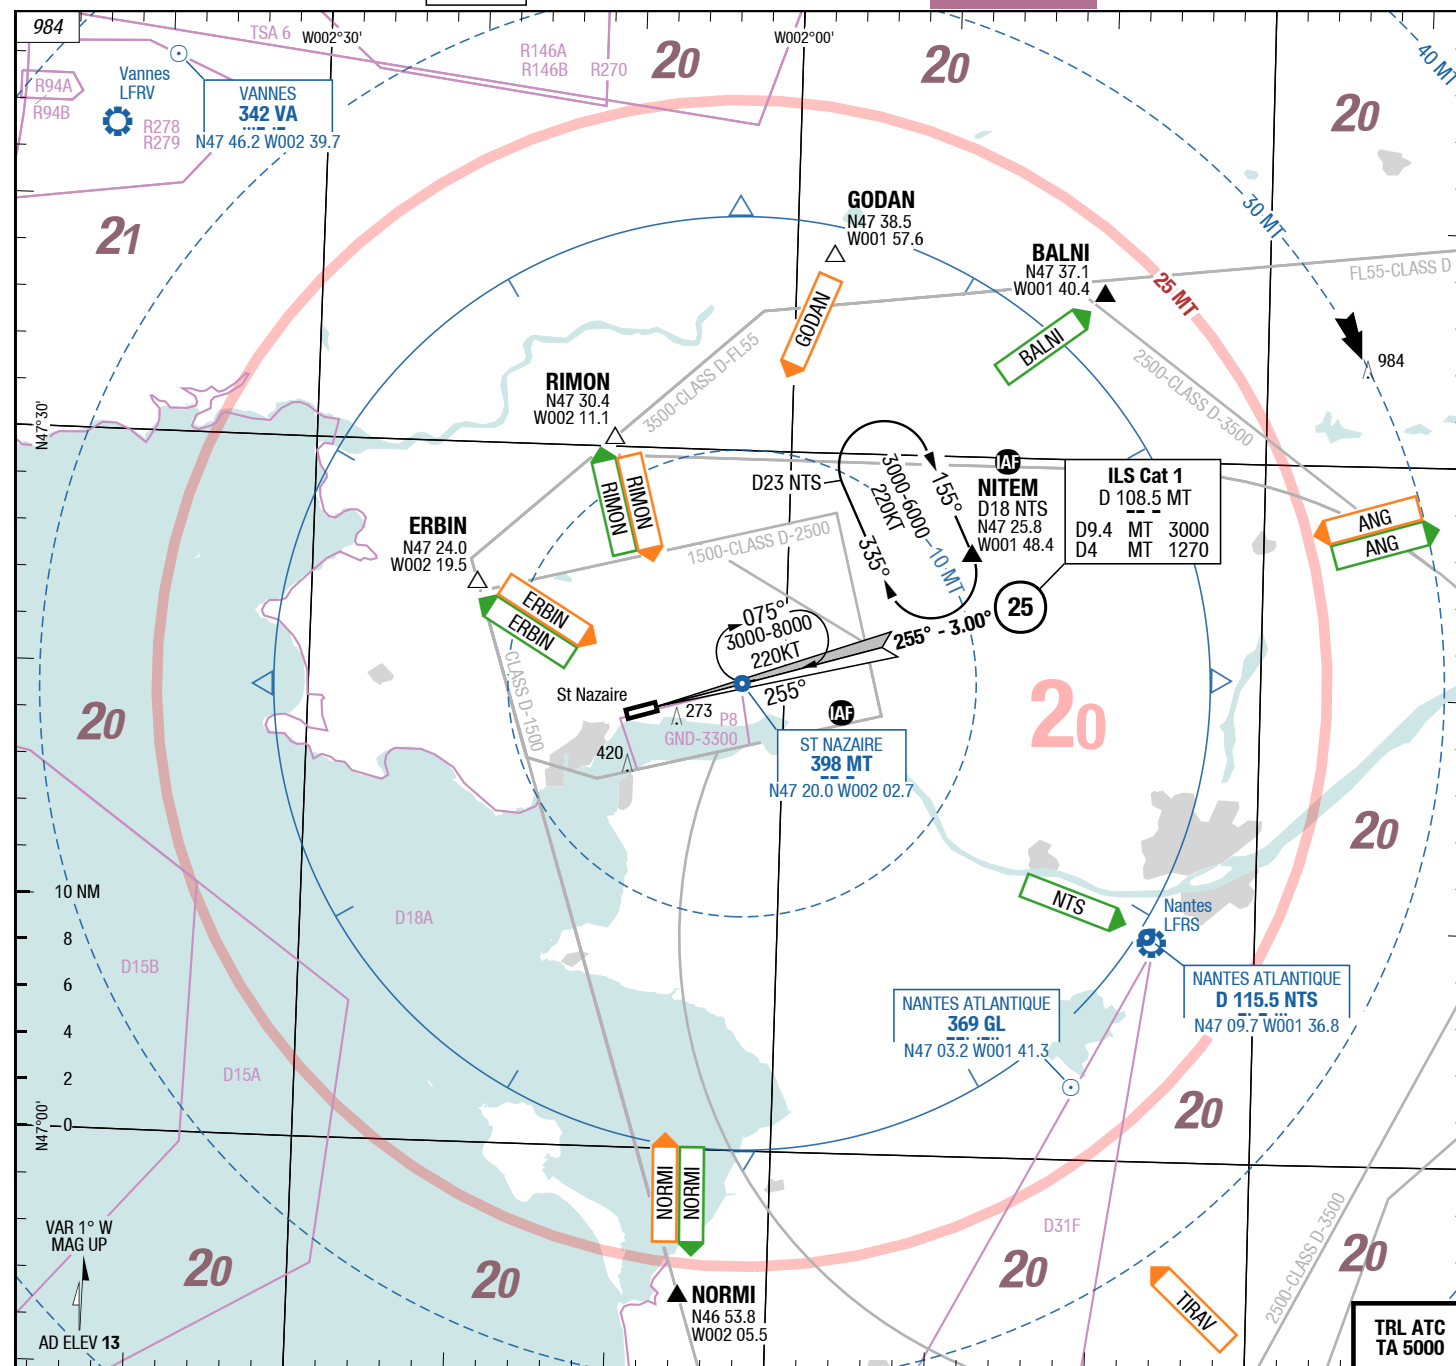

Nantes ATIS	126.925	
Nantes APP	124.425	above 1500
	124.250	above 1500
	119.400	above 1500
TWR	118.950	HO
Nantes Info	120.125	

Landing RWY system:

07

83.0°

60 HL

2400 x 45

THR 12 (0hPa) / TDZ 12 (---%) 0.0%

60 HL

45 x 2400

420

0.0%

TDZ --- (---%) / THR 11 (0hPa)

Changes: Nil

Effective 21-JUN-2018

14-JUN-2018

SNR-LFRZ

France St Nazaire Montoir

AGC

AGC


AGC

Montoir St Nazaire France

AGC

3-20

Nantes ATIS 126.925
TWR 118.950 HO

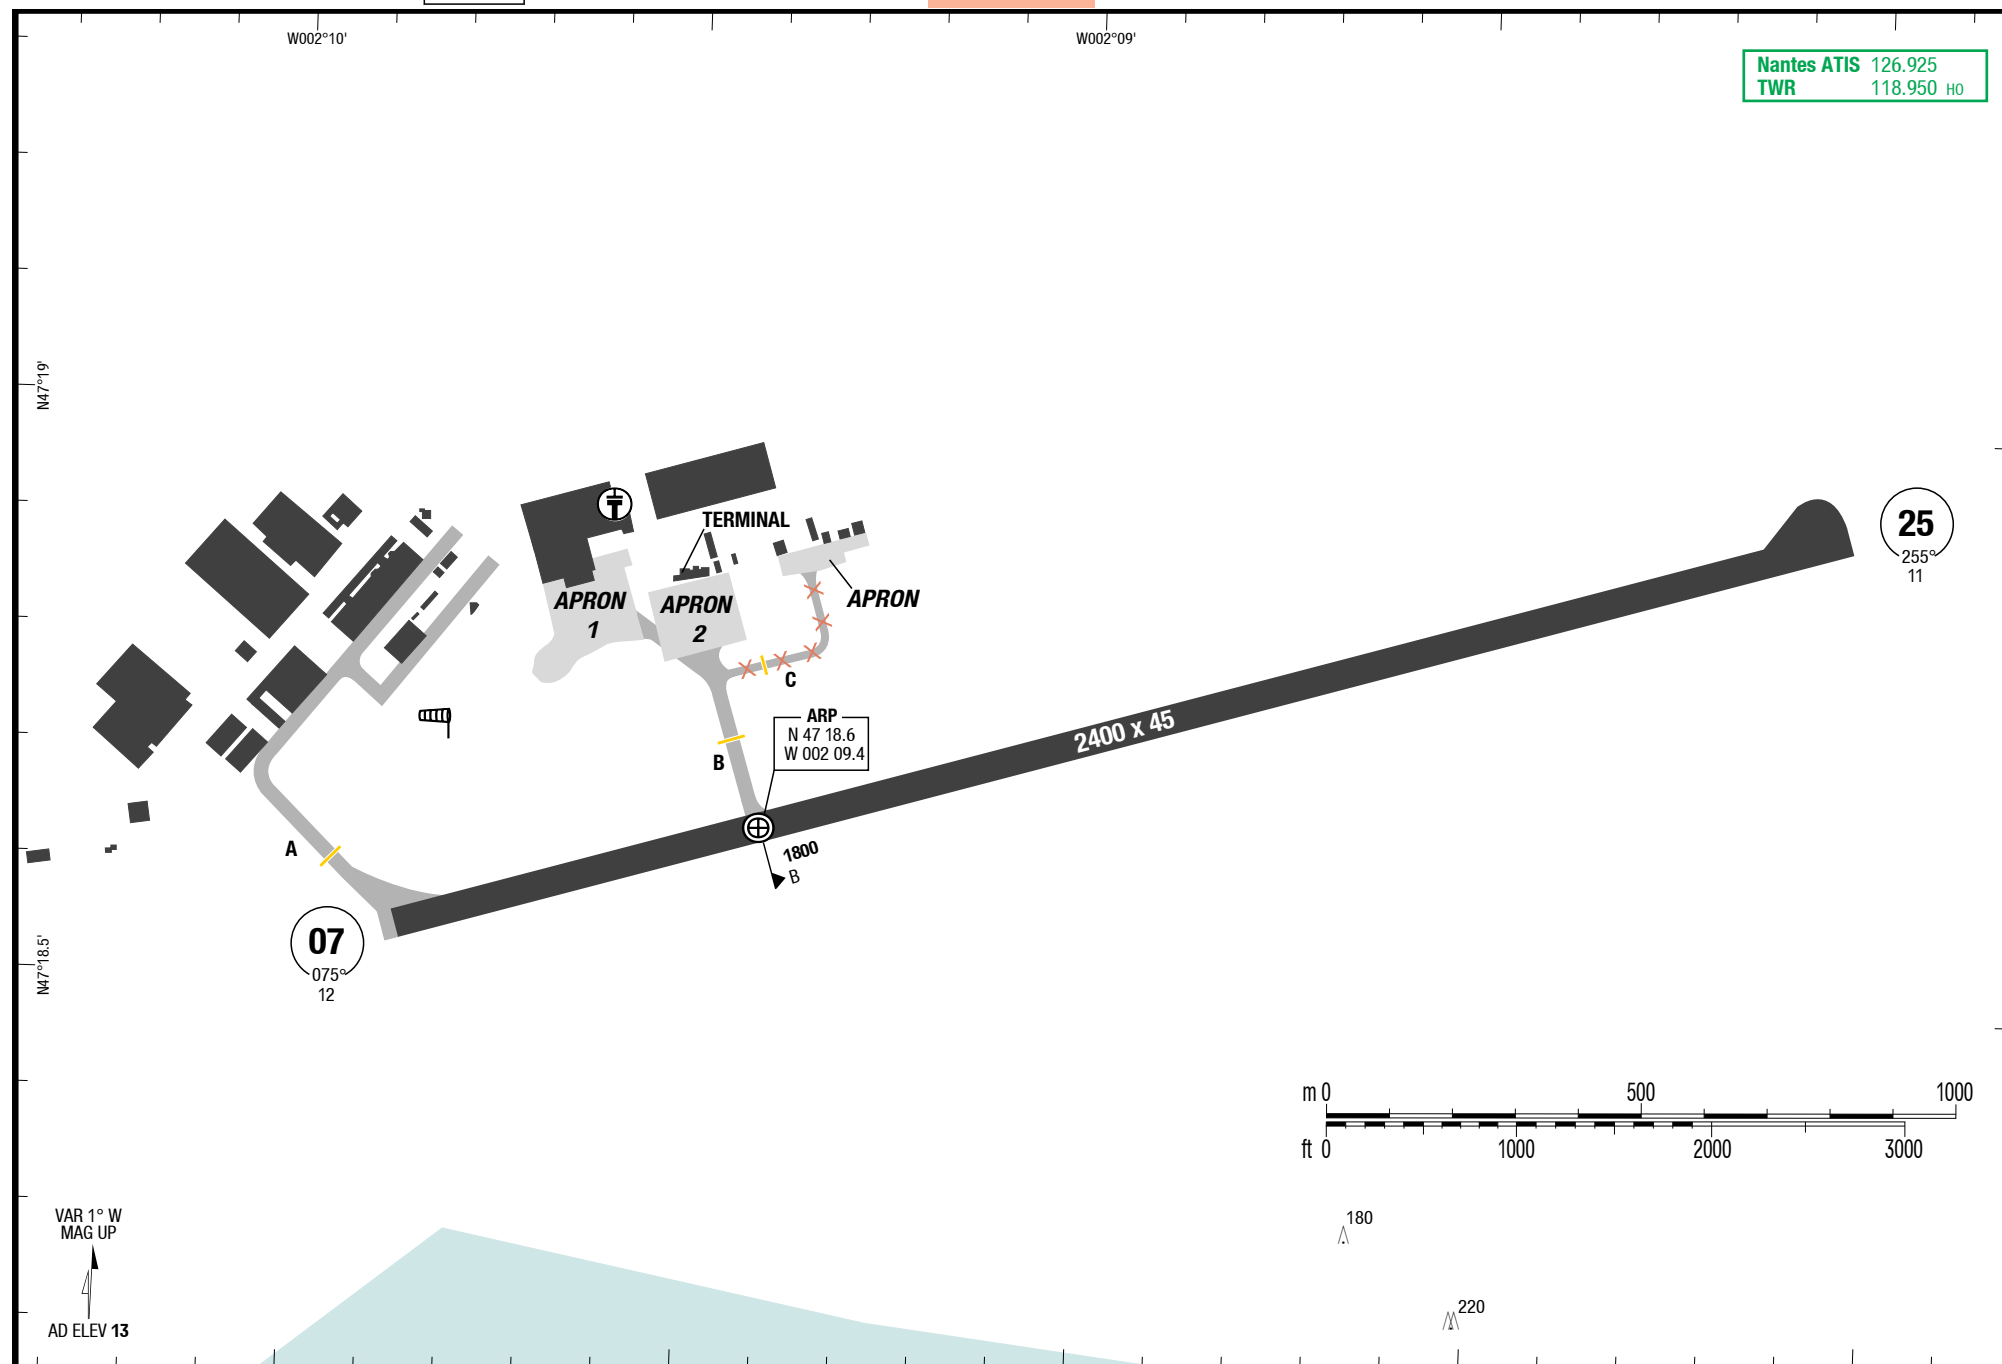

Changes: HLDG POS, BLDG

22-FEB-2018
SNR-LFRZ

France St Nazaire Montoir

NIL
SIDs


SID

SID

Montoir St Nazaire France

NIL
SIDs

4-10

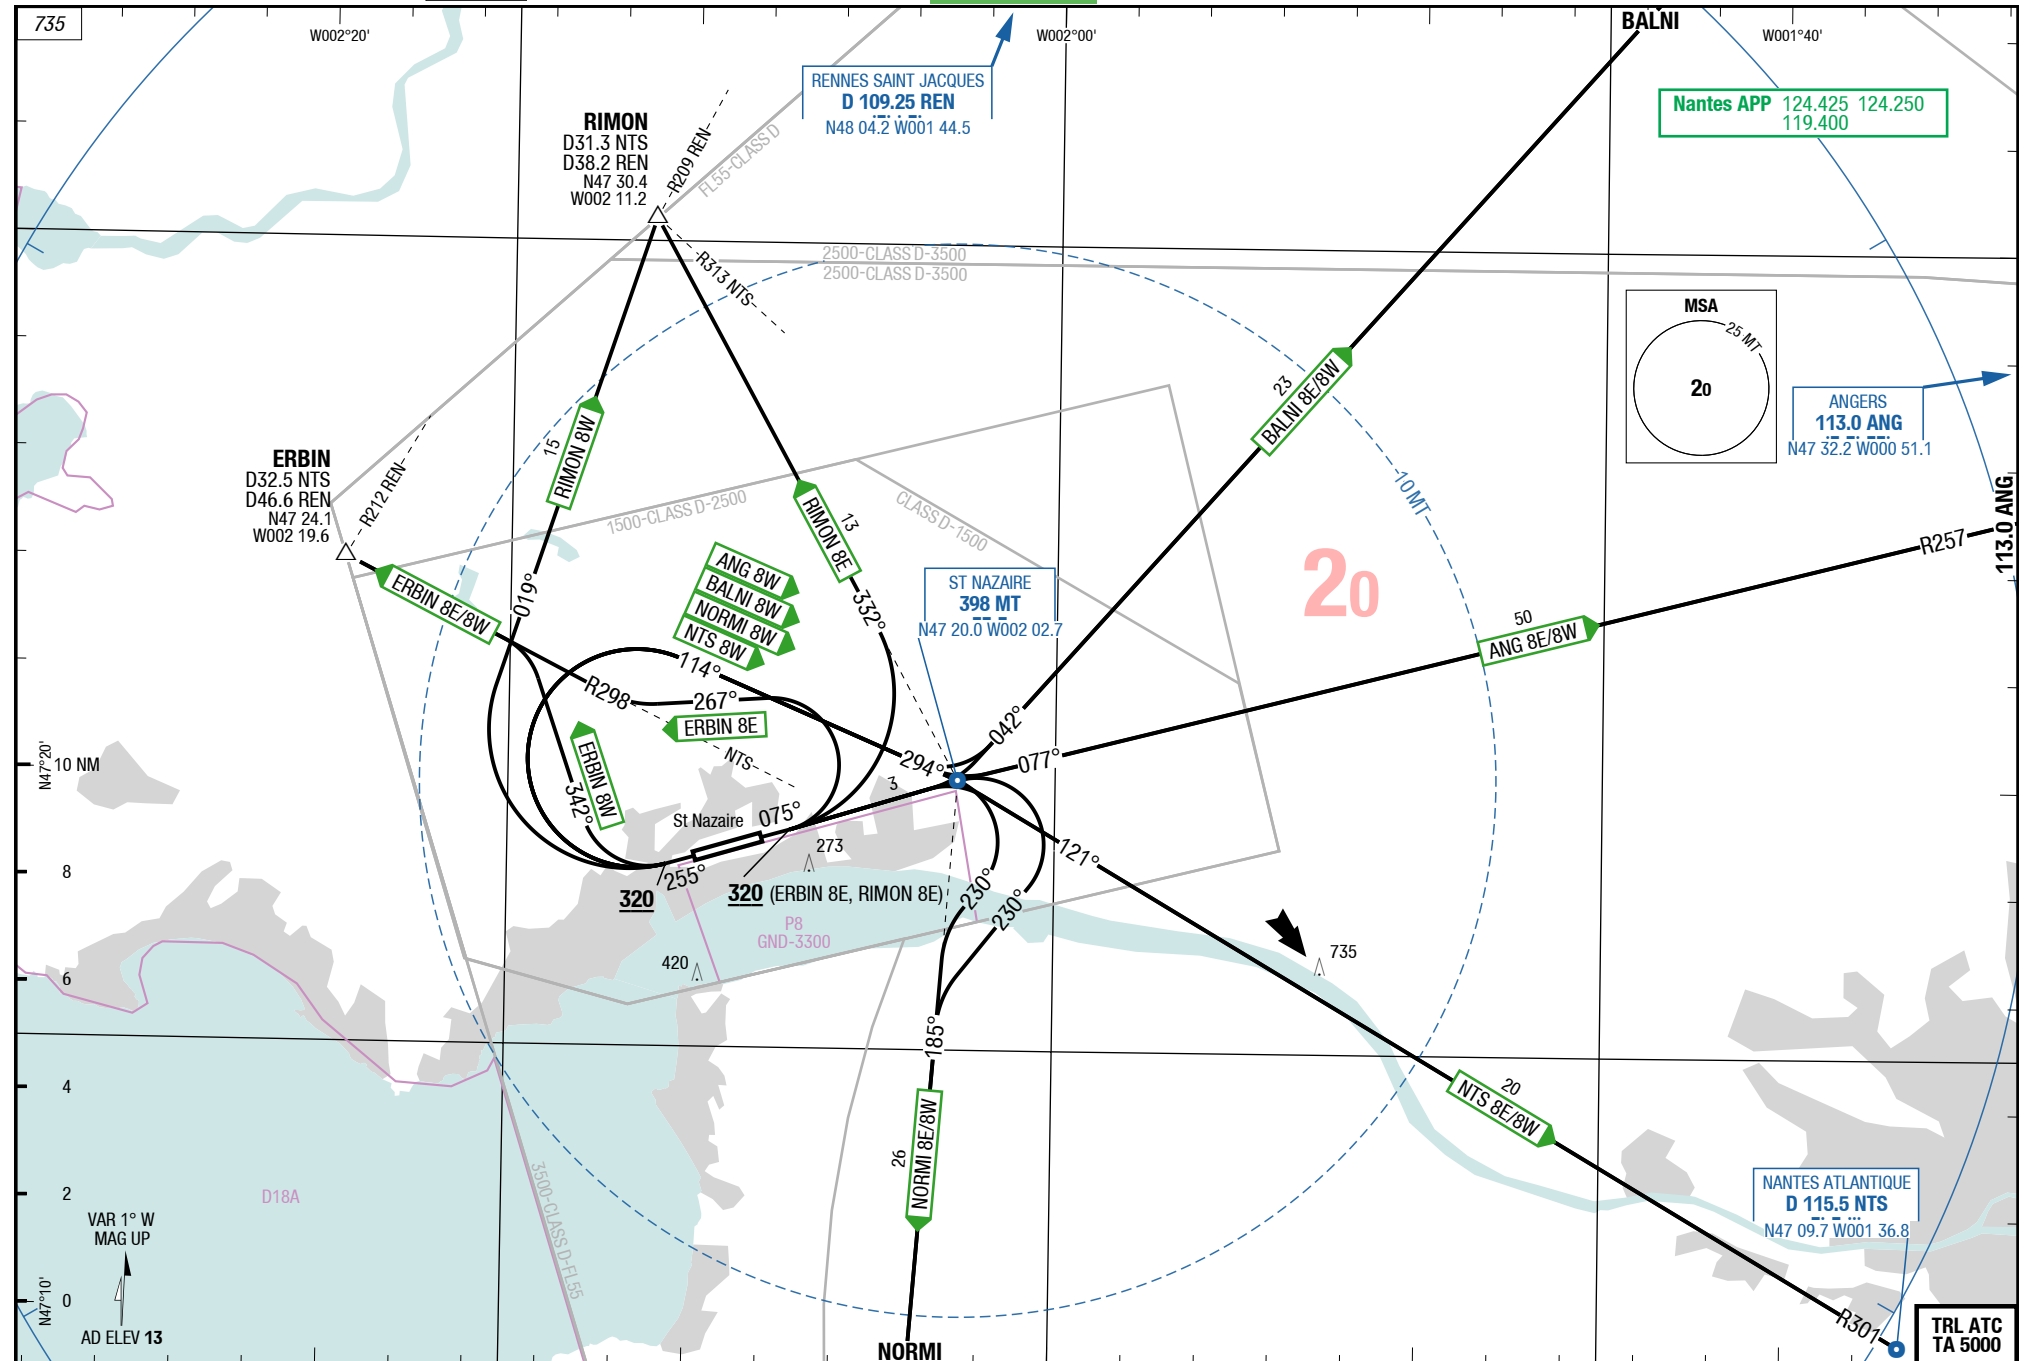

Changes: OBST

SNR-LFRZ

5-10

SIDs


SIDPT

**ANGERS 8E / BALNI 8E / ERBIN 8E / NANTES ATLANTIQUE 8E / NORMI 8E / RIMON 8E /
ANGERS 8W / BALNI 8W / ERBIN 8W / NANTES ATLANTIQUE 8W / NORMI 8W / RIMON
8W**

RWYs 07 (075°) / 25 (255°)

DESIGNATOR	ROUTING	ALTITUDES
	Runway 07	
ANGERS 8E ANG 8E 124.425	at MT intercept R257 ANG to ANG	
BALNI 8E 124.425	at MT LT - QDR 042 MT to BALNI	
ERBIN 8E 124.425	at MNM 320 LT 267° - intercept R298 NTS to ERBIN	
NANTES ATLANTIQUE 8E NTS 8E 124.425	at MT intercept R301 NTS to NTS	
NORMI 8E 124.425	at MT RT 230° - intercept QDR 185 MT to NORMI	
RIMON 8E 124.425	at MNM 320 LT - intercept QDR 332 MT to RIMON	
	Runway 25	
ANGERS 8W ANG 8W 124.425	at MNM 320 RT - intercept QDR 294 MT to MT - intercept R257 ANG to ANG	
BALNI 8W 124.425	at MNM 320 RT - intercept QDR 294 MT to MT - LT QDR 042 MT to BALNI	
ERBIN 8W 124.425	at MNM 320 RT 342° - intercept R298 NTS to ERBIN	
NANTES ATLANTIQUE 8W NTS 8W 124.425	at MNM 320 RT - intercept QDR 294 MT to MT - intercept R301 NTS to NTS	
NORMI 8W 124.425	at MNM 320 RT - intercept QDR 294 MT to MT - RT 230° - intercept QDR 185 MT to NORMI	
RIMON 8W 124.425	at MNM 320 RT 019° to RIMON	


6-10

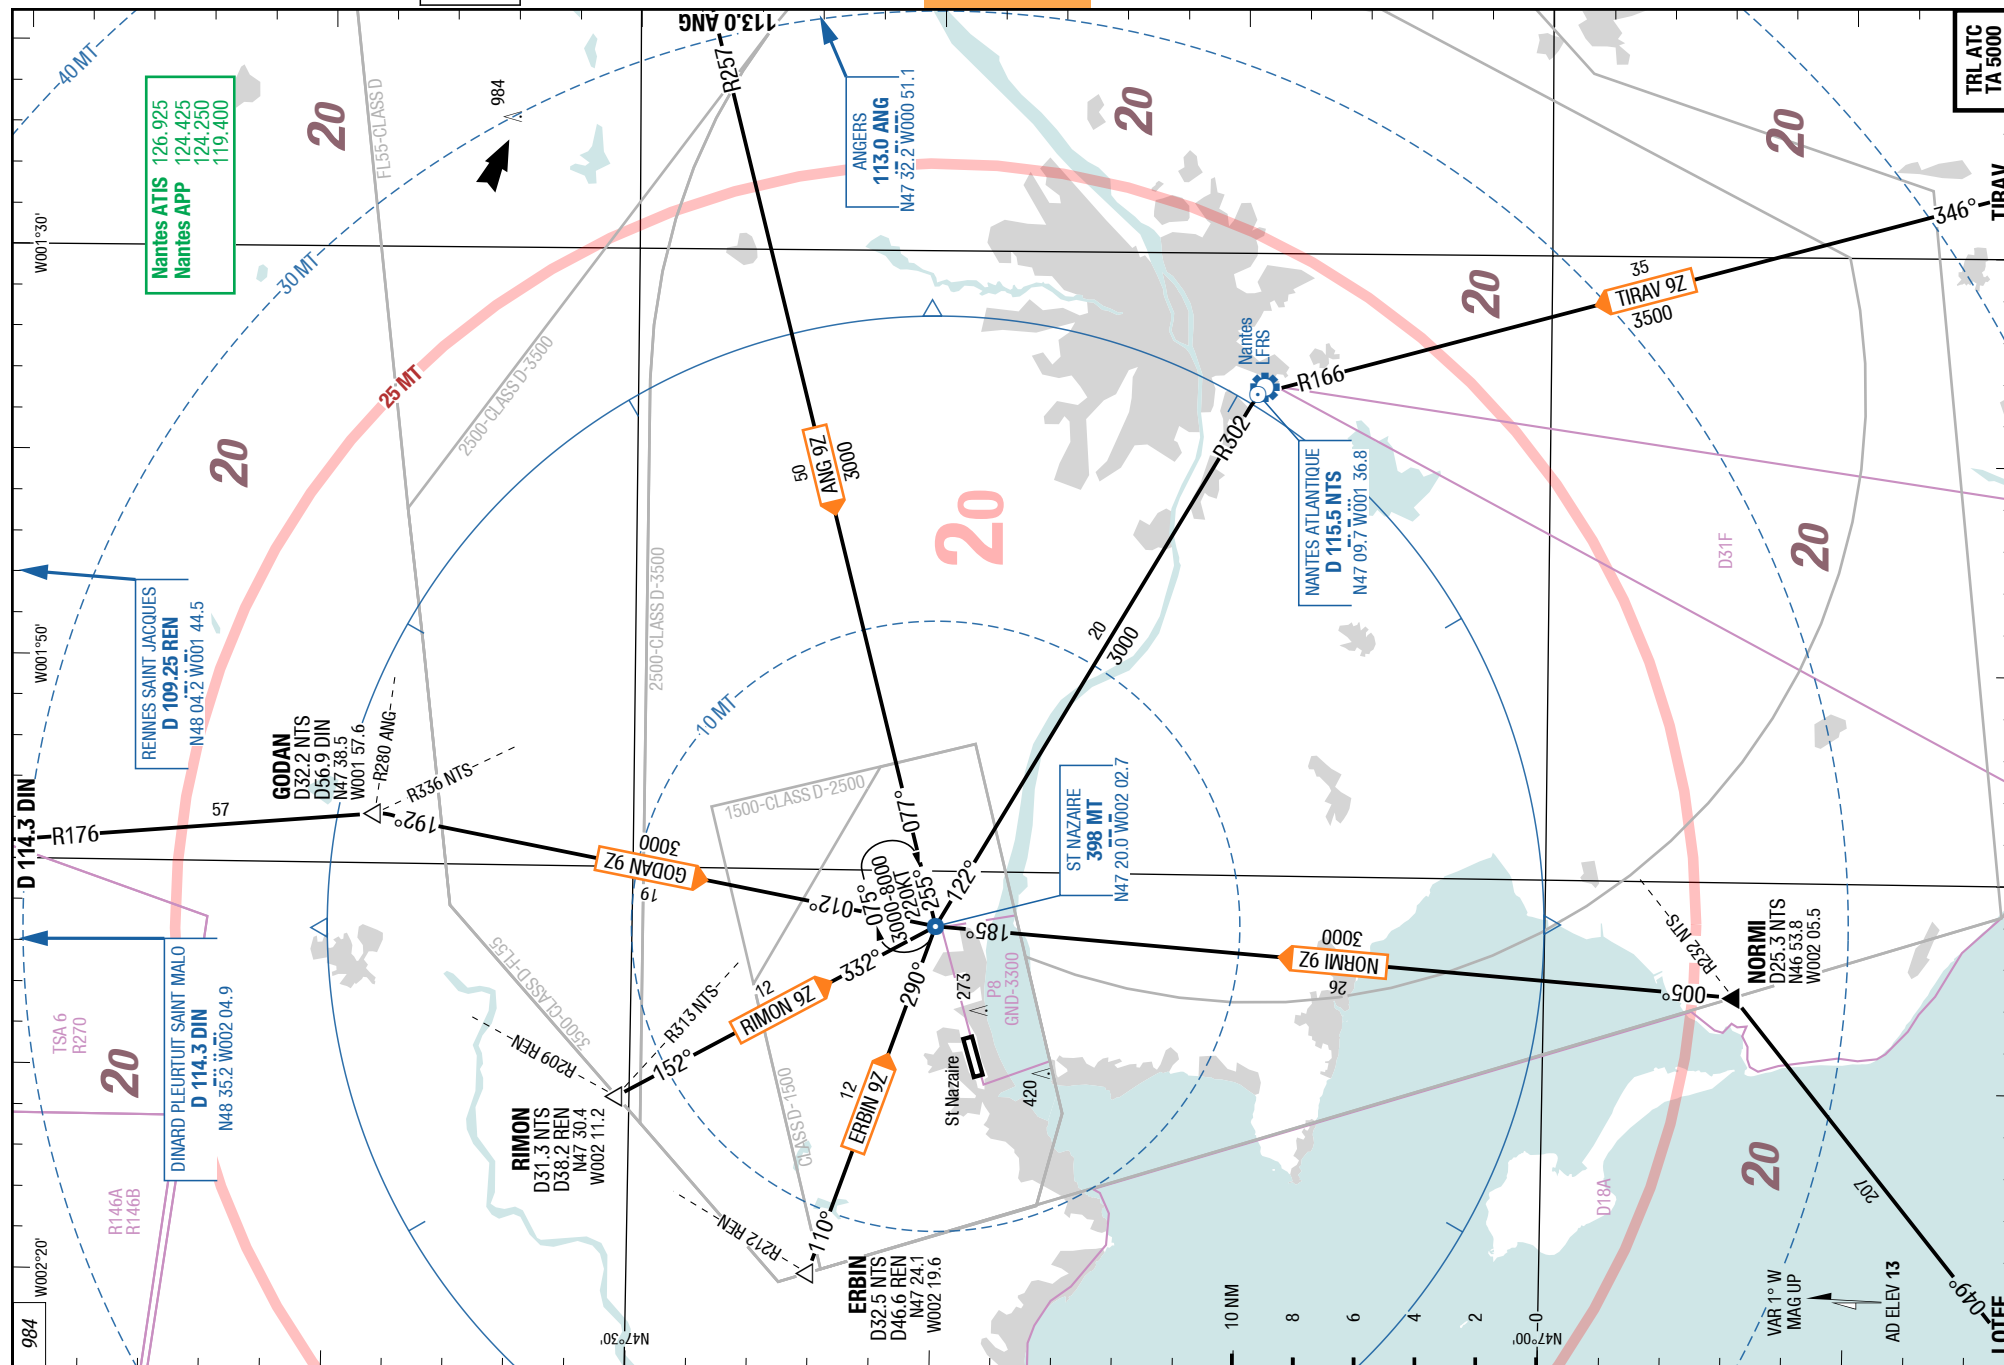

SNR-LFRZ

7-10



ILS or LOC 25

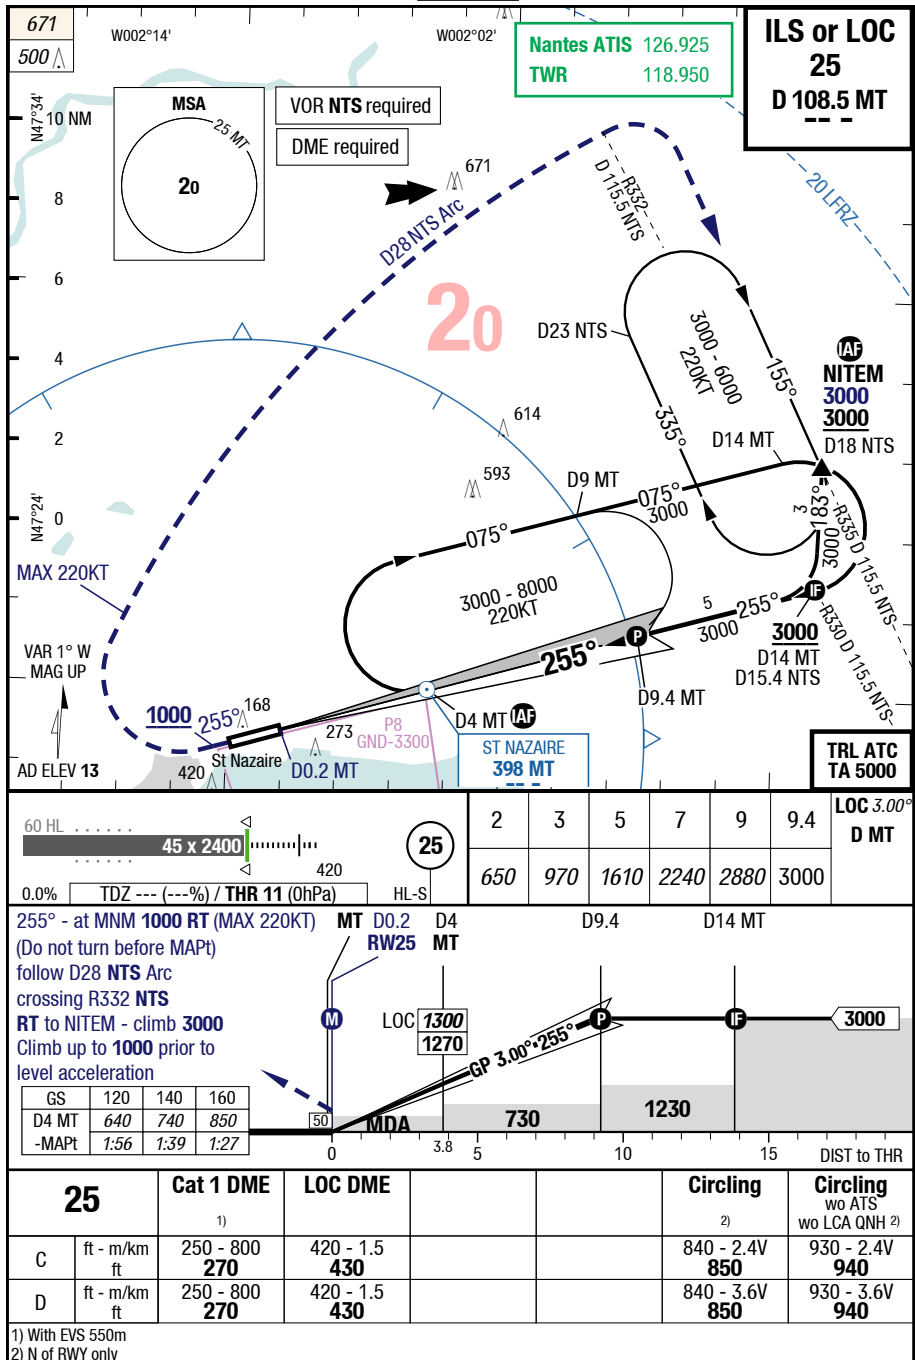

SNR-LFRZ


7-30

RNAV (GNSS) 25

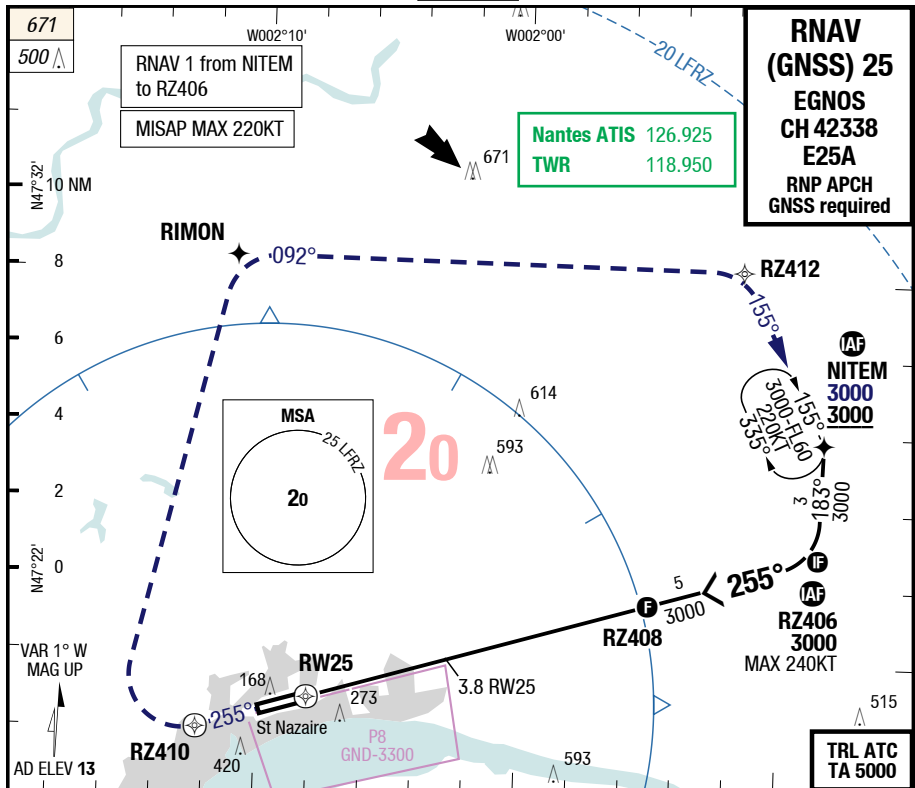

<div> <div>25</div> <div>HL-S</div> </div>	3	4	5	6	7	9.2	<div>3.00</div> <div>RW25</div>
	1020	1340	1660	1980	2290	3000	


255° - at RZ410 **RT**
(Do not turn before MAPt)
direct RIMON - **RT** 092° to RZ412
RT 155° to NITEM - climb **3000**
Climb **1000** prior to
level acceleration
(MISAP MAX 220KT)

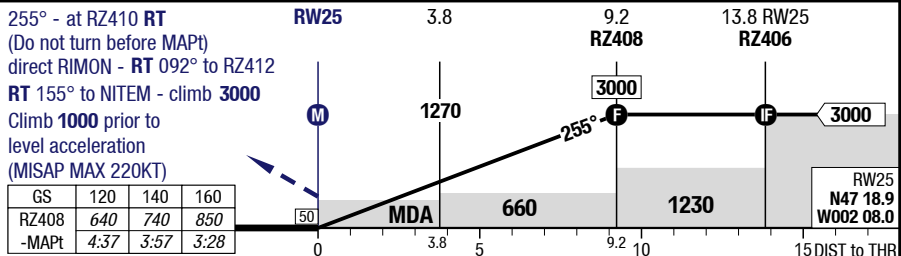

25		RNAV GNSS LPV 1)	RNAV GNSS VNAV 2) 3) 4)	RNAV GNSS LNAV		Circling 5)	Circling wo ATS wo LCA QNH 5)
C	ft - m/km ft	210 - 750 220	370 - 1.3 380	460 - 1.7 470		840 - 2.4V 850	930 - 2.4V 940
D	ft - m/km ft	210 - 750 220	370 - 1.3 380	460 - 1.7 470		840 - 3.6V 850	930 - 3.6V 940


1) With EVS 550m 2) Uncompensated BARO VNAV NA below -15°C (5°F) 3) Use with Saint Nazaire (LFRZ) QNH only 4) With EVS 900m
5) N of RWY only

Changes: MIN, Track, HLDG

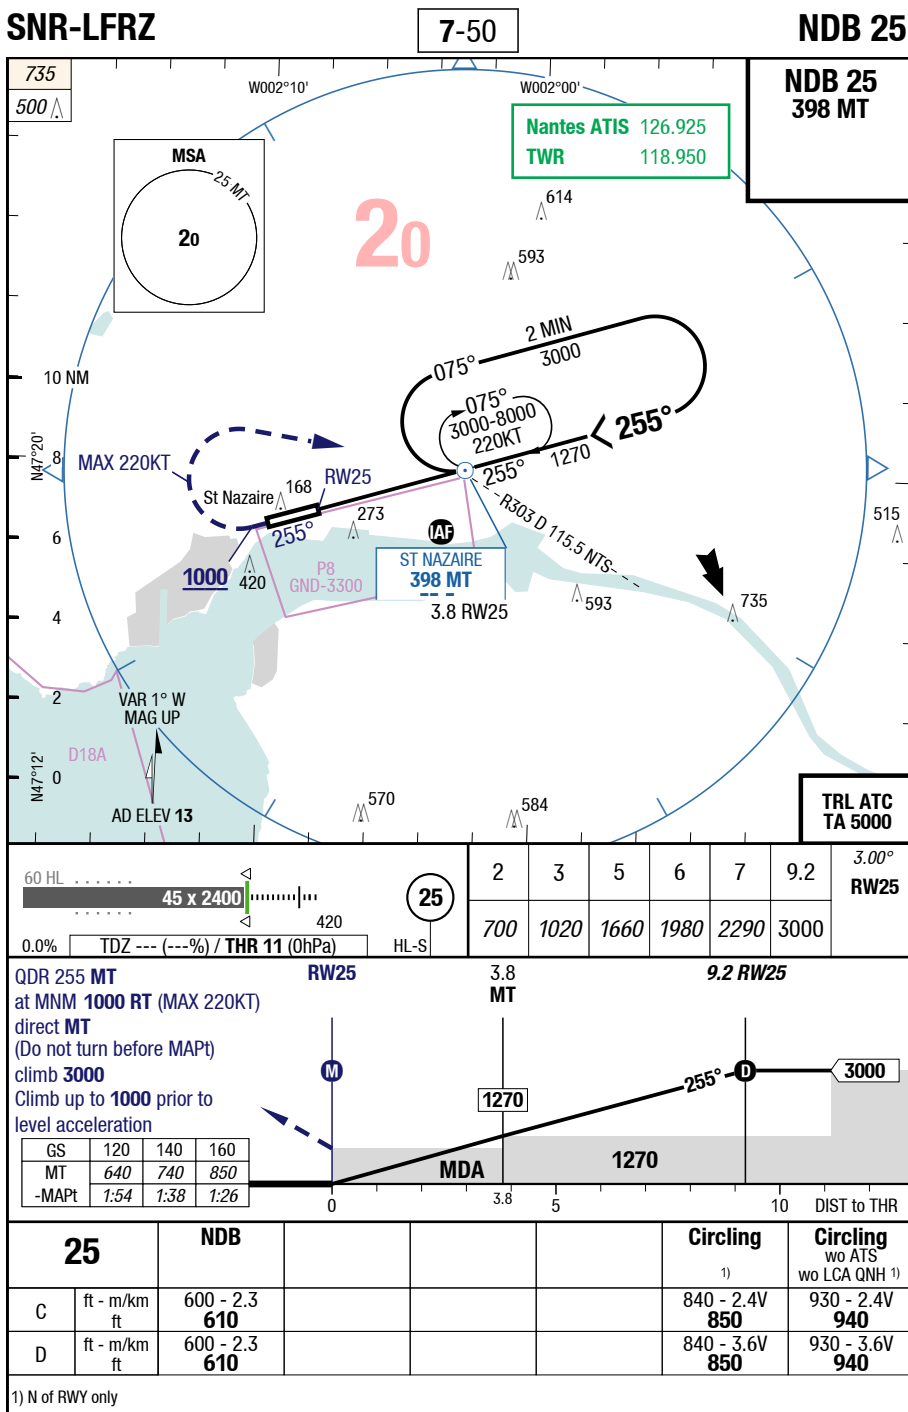

7-60

Circling 07 with prescribed tracks

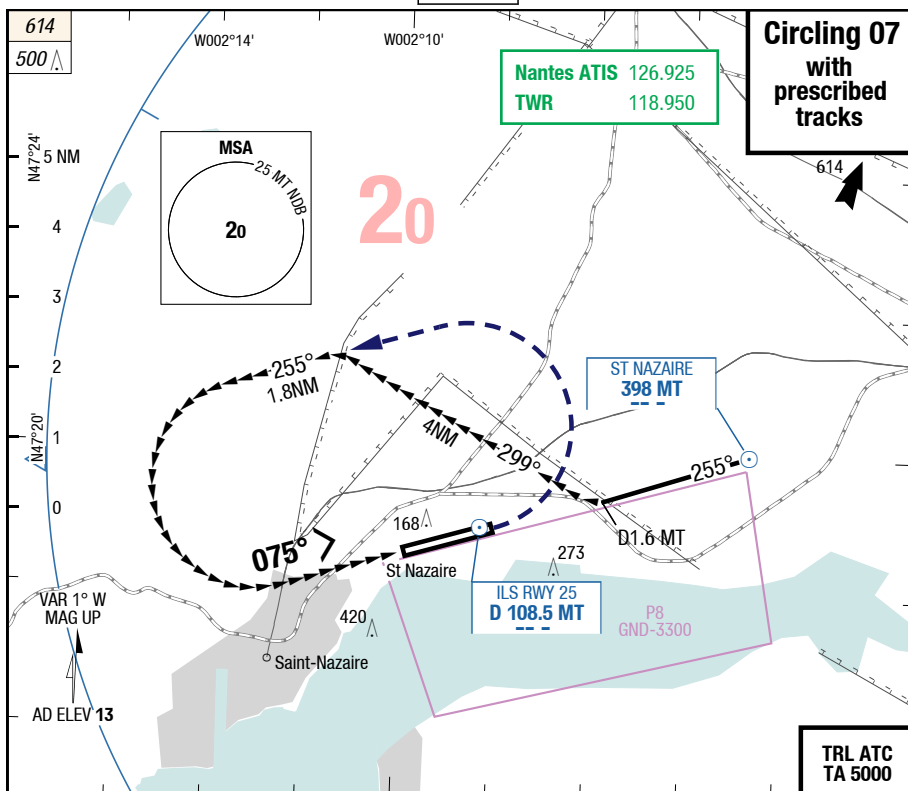

VISUAL

07

83.0°

2400 x 45

THR 12 (0hPa) / TDZ 12 (---%)	0.0%
--------------------------------------	------

07						Circling P-TRK	Circling
C	ft - m/km ft					840 - 2.4V 850	Not published
D	ft - m/km ft					840 - 3.6V 850	Not published