

GENERAL**Operational Hours****ATS Hours:** TWR 1200-0200‡, use CTAF outside TWR OPS hours**AD OPS Hours:** Attended 1200-0400‡**Airport Information****RFF:** FAA Index B / CAT 6**Fuel:** Jet A**PCN:** RWY 09/27: 75/F/A/W/T**Customs:** WED-SUN 1300-2130‡**Operation****Traffic Notes**

PPR for unscheduled air carrier OPS with more than 30 PAX seats 0430-1045‡.

RWY and APCH are dimmed/turned off when TWR CLSD, thereafter activation by CTAF.

Noise Abatement Procedure

Extremely noise sensitive area, no OPS 0400-1200‡. Use NBAA NAP other times.

Engine Run-up Areas

ENG run-up in designated area on TWY A between TWY A10 and TWY A11.

Communication

ACFT overflying SIMPL, ACRUZ, CANOA and MAXIM shall contact Miami CTR 10min prior to crossing the Miami flight info region.

Warnings**EYW VOR/DME**

VOR/DME unusable: R121-139.

DME unusable: R123-R133 beyond 20NM.

VOR unusable:

R025-R059 below 3000ft.

R060-R093 beyond 20NM below 5000ft.

R094-R140 beyond 20NM.

R270-R280 beyond 20NM.

R337-R352 beyond 20NM.

R190-R255.

Intensive MIL traffic south and east of AD, ACFT entering AD traffic area south-east through west.

Parachute jumping.

Birds in vicinity of AD.

ARRIVAL**Speed**

MAX IAS 250KT below 10000ft.

Communication**COM Failure:** See CRAR United States

ARRIVAL**Arrival Procedure****VFR Traffic Pattern:** RWY 09 right-hand circuit.**DEPARTURE****Take-off Minima**

RWY		09/27	
1+2 ENG	ft - ft/SM	0 - 1.0V	-
3+4 ENG		0 - 0.5V	-

Speed

MAX IAS 250KT below 10000ft.

Communication**COM Failure:** See CRAR United States

29-JUN-2017
EYW-KEYW

United States Key West Key West Intl

AGC
AFC

Key West Intl Key West United States


AGC
AFC

2-10



ATIS	119.675	ASOS
Miami Center	133.500	0300-1200+
APP	124.025	1200-0300+
DEP	124.025	1200-0300+
TWR	118.200	1200-0200+
CTAF	118.200	ARCAL
UNICOM	122.950	
GND	121.900	
RCO (Miami RDO)	113.500	Receive
	122.100	Transmit
	122.200	016°-329°, within 20NM, above 1500
	126.700	
	126.900	
DLV	121.900	

Landing RWY system:

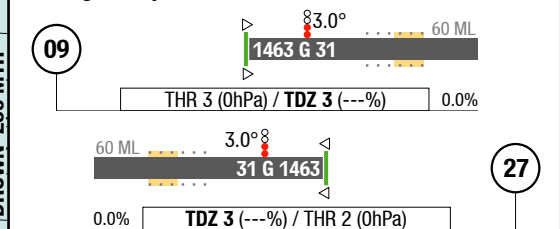

Changes: APL

29-JUN-2017
EYW-KEYW

United States **Key West** Key West Intl

AGC

AGC

AGC


Key West Intl **Key West** United States

AGC

3-20

Caution:
Be alert to RWY crossing clearances.
Readback of all RWY holding instructions is required.


ATIS	119.675	ASOS
TWR	118.200	1200-0200±
CTAF	118.200	ARCAL
UNICOM	122.950	
GND	121.900	
RCO (Miami RDO)	113.500	Receive
	122.100	Transmit
	122.200	016°-329°, within 20NM, above 1500
	126.700	
	126.900	
DLV	121.900	

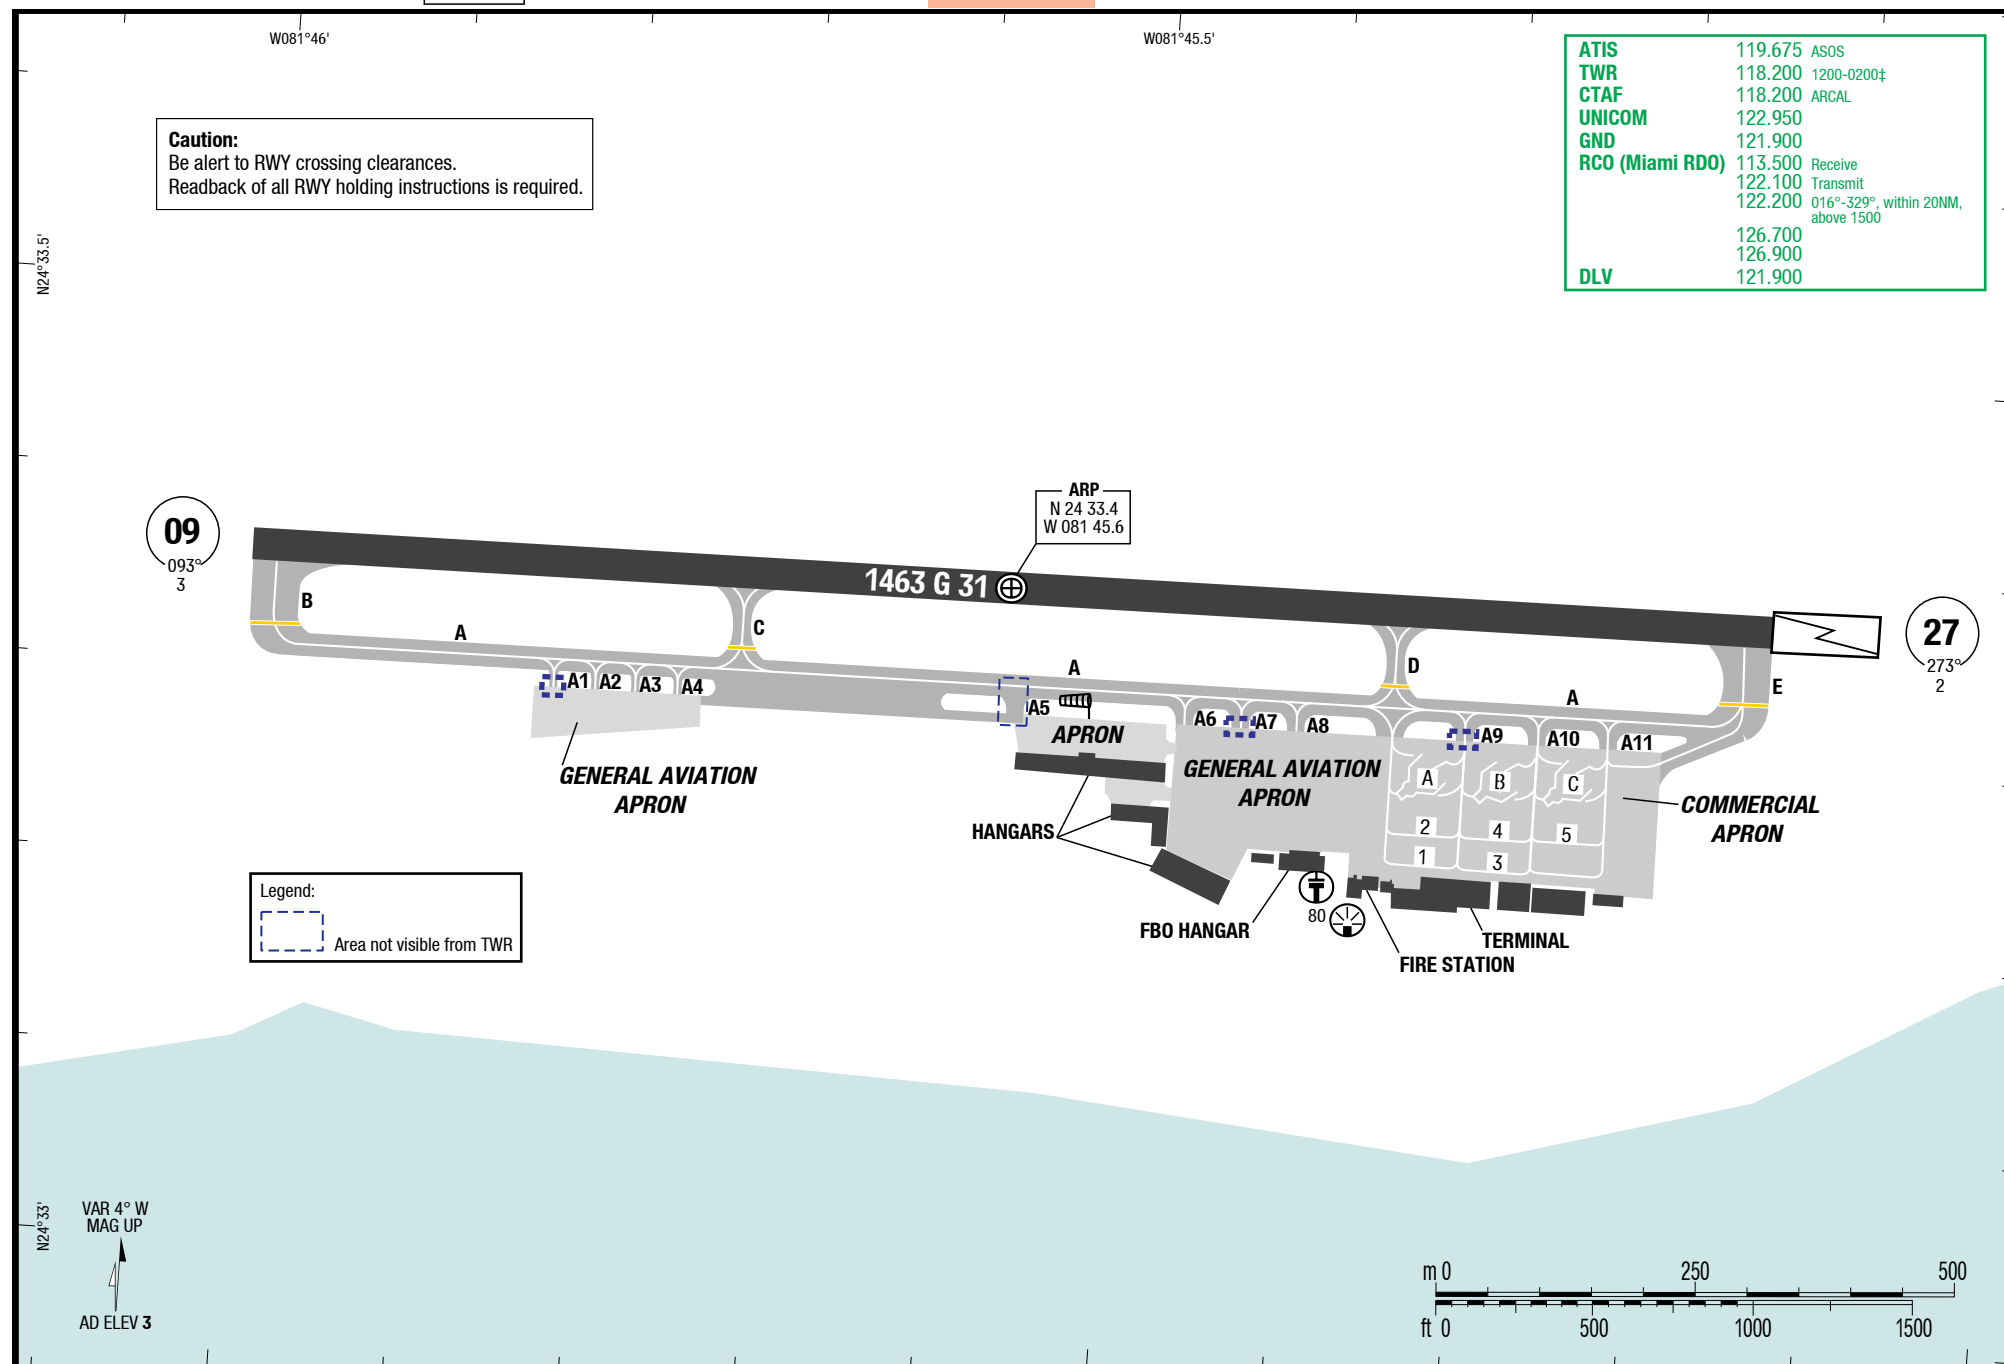

Changes: Nil

Obstacle Departure	
RWY	Routing
09 / 27	Climb on HDG 087° CW HDG 033° from DER to avoid R2916 and unmarked tethered balloon up to 14000 ft MSL.
RWY	Notes
09	Rod on antenna, dome on building, poles, and numerous trees beginning 38ft from DER, 199ft right of centerline, up to 75ft AGL/82ft MSL. Obstruction light on building, pole, and numerous trees beginning 4ft from DER, 220ft left of centerline, up to 38ft AGL/45ft MSL.
27	Pole and numerous trees beginning 27ft from DER, 116ft right of centerline, up to 83ft AGL/90ft MSL. Numerous bushes and trees beginning 202ft from DER, 78ft left of centerline, up to 37ft AGL/44ft MSL.

RNAV (GPS) 09



29-JUN-2017


United States Key West Key West Intl

IAC


EYW-KEYW

7-20

RNAV (GPS) 27

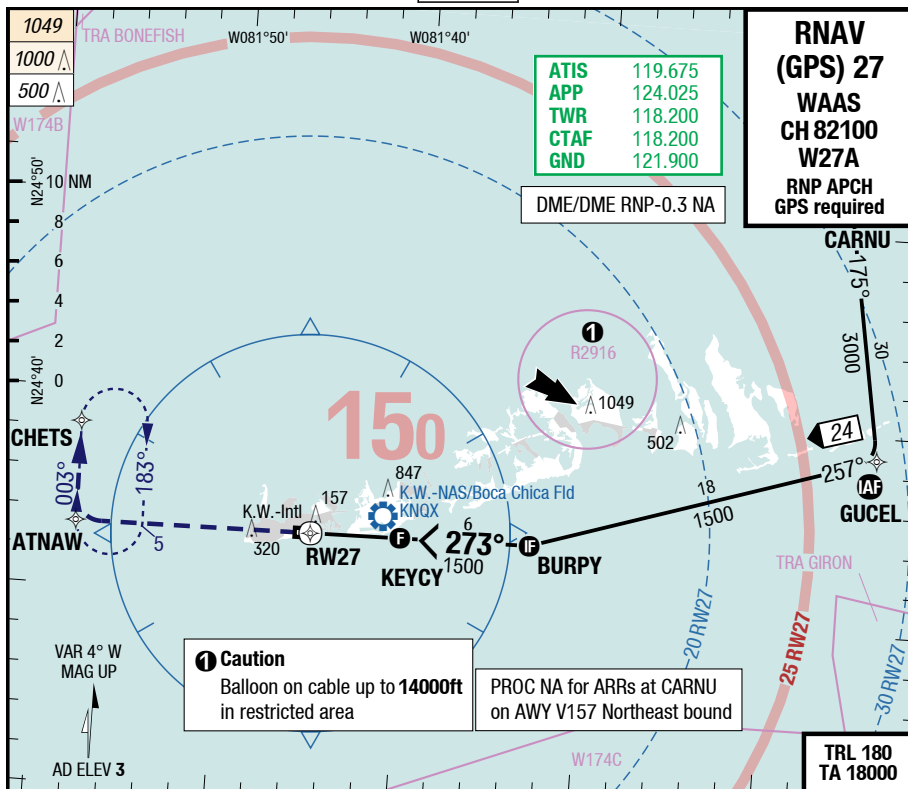

60 ML	3.0°	2	3	4	4.5		3.00°
31 G 1463		700	1020	1340	1500		RW27
0.0%	TDZ 3 (---%) / THR 2 (0hPa)						

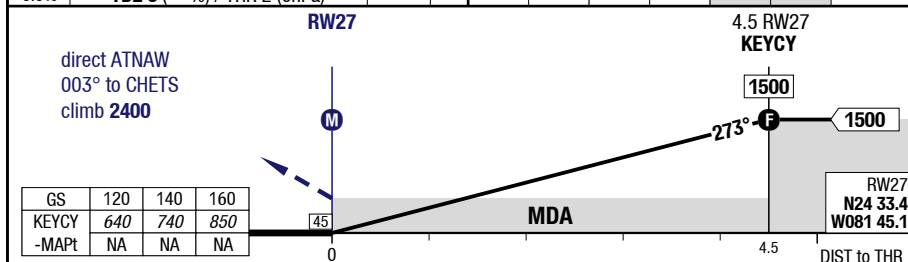

27	RNAV GPS LPV 1)	RNAV GPS LNAV 1)	SRA 2)	Circling 1) TERPS	Circling 2) TERPS
C	ft - ft/SM 250 - 0.88V 260	460 - 1.38V 460	440 - 1.25V 440	600 - 1.5V 610	620 - 1.75V 620
D	ft - ft/SM 250 - 0.88V 260	460 - 1.38V 460	440 - 1.25V 440	700 - 2.25V 710	700 - 2.25V 710


- 1) Use with LCA QNH or Key West NAS (KNQX) QNH only
2) Straight-in and Circling MINIMA NA at night

Changes: APL

Orig A

© Lido 2017

NDB A

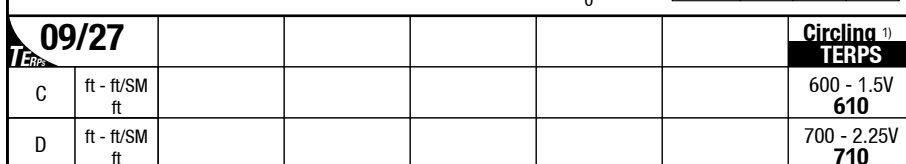

© Lido 2017