



Pneumatics Price List

Products Price List | W.E.F 1 January 2026

CONACT PNEUMATICS PRODUCT CATEGORIES

INDEX

- 1 Push in Fittings ————— 1 - 5
- 2 Polyurethane Tubing ————— 6 - 8
- 3 Cylinders ————— 9 - 31
- 4 Cylinder Accessories ————— 32- 34
- 5 Valves ————— 35 - 36
- 6 Air Treatment ————— 37 - 38
- 7 Coolant Pipes and Dead Plug ——— 39
- 9 Our Dealer Network ————— 40
- 10 Terms & Conditions ————— 41

OPERATING PRESSURE: 0-10 kgf/cm²

OPERATING TEMPERATURE RANGE: -5°C to 60°C

FLUID TYPE: AIR

TUBE OD	Ø4	Ø6	Ø8	Ø10	Ø12	Ø14	Ø16
G-THREAD	M5	01	02	03	04		
	M5X1.0	1/8"	1/4"	3/8"	1/2"		

SIZE	STRAIGHT CONNECTOR	MALE ELBOW	MALE BRANCH TEE	MALE BRANCH "Y"	FEMALE CONNECTOR
					

SIZE	APCG	APLG	APBG	APXG	APCF
4-M5	42	49	-	-	-
4-01	42	49	75	82	55
4-02	46	49	82	90	73
6-M5	46	52	-	-	-
6-01	46	52	86	90	59
6-02	47	59	91	92	67
6-03	62	82	104	102	99
6-04	108	124	143	148	135
8-M8	46	-	-	-	-
8-01	46	64	86	96	75
8-02	47	65	91	98	86
8-03	62	79	108	125	110
8-04	108	124	144	150	140
10-01	65	92	114	110	110
10-02	75	95	114	124	112
10-03	70	102	120	135	115
10-04	110	136	151	152	155
12-01	88	125	158	145	130
12-02	95	130	155	148	130
12-03	104	135	165	156	150
12-04	114	140	175	172	190
14-03	196	223			
14-04	204	245			
16-02	196	-			
16-03	196	223			
16-04	196	233			

OPERATING PRESSURE: 0-10 kgf/cm²

OPERATING TEMPERATURE RANGE: -5°C to 60°C

FLUID TYPE: AIR

TUBE OD	Ø4	Ø6	Ø8	Ø10	Ø12	Ø14	Ø16
G-THREAD	M5	01	02	03	04		
	M5X1.0	1/8"	1/4"	3/8"	1/2"		

SIZE	FLOW CONTROL VALVE	MALE RUN "TEE"	FEMALE ELBOW	BANJO ELBOW
				
SIZE	ASCG	APDG	APLF	APHG
4-M5	155	-	-	-
4-01	170	82	75	105
4-02	170	86	88	115
6-M5	165	-	-	-
6-01	210	95	75	111
6-02	196	96	82	118
6-03	238	106	119	162
6-04	348	155	157	262
8-01	210	92	85	159
8-02	194	93	92	159
8-03	272	118	138	205
8-04	365	155	167	286
10-01	232	105	115	185
10-02	250	115	123	208
10-03	315	125	152	222
10-04	365	159	188	287
12-01	-	152	176	218
12-02	280	155	177	238
12-03	330	160	210	288
12-04	390	175	225	339

OPERATING PRESSURE: 0-10 kgf/cm²

OPERATING TEMPERATURE RANGE: -5°C to 60°C

FLUID TYPE: AIR

TUBE OD

Ø4

Ø6

Ø8

Ø10

Ø12

Ø14

Ø16

SIZE	Equal "TEE"	Equal "Y"	Equal Elbow	Bulk Head	Equal tube to tube
					
SIZE	APE	APY	APV	APM	APU
4	36	40	26	85	25
6	39	40	30	95	26
8	42	46	35	105	28
10	58	60	40	210	38
12	64	65	46	235	43
14	188	-	-	-	96
16	188	-	-	-	99

SIZE	Equal multi "TEE"	Equal Cross	Flow Control In Line	Blanking Plug
				
SIZE	APK	APZA	APA	APP
4	150	59	150	14
6	162	66	165	16
8	193	69	210	18
10	225	94	288	24
12	261	105	330	26

OPERATING PRESSURE: 0-10 kgf/cm²

OPERATING TEMPERATURE RANGE: -5°C to 60°C

FLUID TYPE: AIR

TUBE OD

Ø4

Ø6

Ø8

Ø10

Ø12

Ø14

Ø16



UNEQUAL "TEE"

SIZE	6-4-6	8-6-8	10-6-10	10-8-10	12-8-12	12-10-12
APEG	55	72	79	78	85	92
APEG	4-6-4	6-8-6	8-10-8			
APEG	55	77	82			



UNEQUAL TUBE TO TUBE

SIZE	6-4	8-4	8-6	10-6	10-8	12-8	12-10	12-6	16-12
APG	40	52	46	53	53	62	62	65	136



TUBE REDUCER

SIZE	6-4	8-6	10-6	10-8	12-8	12-10
APGJ	64	66	78	80	88	110



HAND VALVE

SIZE	4-4	6-6	8-8	10-10	12-12
AHVFF	358	389	411	484	590



EQUAL MULTI TEE

SIZE	6-04	8-06	10-08
APKDG	275	297	314



BRASS CONICAL SILENCER

SIZE	M5	6 (1/8")	8 (1/4")	10 (3/8")	15 (1/2")	20 (3/4")	25 (1")
A	29	35	54	90	115	270	550



BRASS BUTTON SILENCER

SIZE	6 (1/8")	8 (1/4")	10 (3/8")	15 (1/2")
V	36	52	67	99



QUICK RELEASE COUPLERS

OPERATING PRESSURE: 0-10 kgf/cm²

OPERATING TEMPERATURE RANGE: -5°C to 60°C

FLUID TYPE: AIR



	SM (MALE SOCKET)	SF (FEMALE SOCKET)	SP (PUSH ON SOCKET)
20	345	362	362
30	385	397	397
40	395	434	437



	PM (PLUG MALE)	PF (PLUG FEMALE)	PP (PUSH ON PLUG)
20	75	98	112
30	110	116	137
40	135	155	165

GUIDE

	THREAD SIZE	TUBE SIZE
20	1/4	8 mm
30	3/8	10 mm
40	1/2	12 mm



OPERATING PRESSURE: 0-10 kgf/cm²

BURST PRESSURE : 25 Kgf/cm²

OPERATING TEMPERATURE RANGE: -5°C to 60°C

FLUID TYPE: Air

ITEM CODE	OD x ID	ROLL LENGTH	PRICE (Per Mtr.)
PU0425	4 X 2.5	200MTR	13
PU0530	5 X 3	100MTR	18
PU0640	6 X 4	100MTR	18
PU0850	8 X 5	100MTR	36
PU0855	8 X 5.5	100MTR	34
PU0860	8 X 6	100MTR	29
PU1065	10 X 6.5	100MTR	56
PU1070	10 X 7	100MTR	53
PU1080	10 X 8	100MTR	45
PU1280	12 X 8	100MTR	72
PU1290	12 X 9	100MTR	69
PU1410	14 X 10	50MTR	108
PU1612	16 X 12	50MTR	113

NOTE: BOBIN COST EXTRA @ ₹55/ROLL

Anti Spark PU Tube

Connection

OPERATING PRESSURE: 0-10 kgf/cm²

OPERATING TEMPERATURE RANGE: -5°C to 80°C

ITEM CODE	SIZE	LENGTH	UNIT PRICE (PER MTR)
PUA64008	Anti Spark Tube 6x4x8	100 MTR	123
PUA85010	Anti Spark Tube 8x5x10	100 MTR	163
PUA106512	Anti Spark Tube 10x6.5x12	100 / 50 MTR	253
PUA128014	Anti Spark Tube 12x8x14	100 / 50 MTR	429



OPERATING PRESSURE: 0-10 kgf/cm²

BURST PRESSURE : 25 Kgf/cm²

OPERATING TEMPERATURE RANGE: -5°C to 60°C

FLUID TYPE: Air

ITEM CODE	SIZE	LENGTH	PRICE
PUC0640-3	6 X 4	3MTR	119
PUC0640-5	6 X 4	5MTR	191
PUC0640-10	6 X 4	10MTR	376
PUC0640-15	6 X 4	15MTR	561
PUC850-3	8x5	3MTR	166
PUC850-5	8x5	5MTR	272
PUC850-10	8x5	10MTR	538
PUC850-15	8x5	15MTR	798
PUC0855-3	8 X 5.5	3MTR	162
PUC0855-5	8 X 5.5	5MTR	254
PUC0855-10	8 X 5.5	10MTR	515
PUC0855-15	8 X 5.5	15MTR	769
PUC1065-3	10 X 6.5	3MTR	231
PUC1065-05	10 X 6.5	5MTR	393
PUC1065-10	10 X 6.5	10MTR	780
PUC1065-15	10 X 6.5	15MTR	1167
PUC1280-3	12 X 8	3MTR	307
PUC1280-5	12 X 8	5MTR	503
PUC1280-10	12 X 8	10MTR	1000
PUC1280-15	12 X 8	15MTR	1462
PUC1612-3	16 X 12	3MTR	433
PUC1612-5	16 X 12	5MTR	734
PUC1612-10	16 X 12	10MTR	1462
PUC1612-15	16 X 12	15MTR	2178

*4% extra charges apply on tubing & recoil for colors except BLUE & YELLOW.



NYLON TUBING PA 6

Pa6 offers lesser flexibility than PU but its operating pressure and temperature zones are bigger than PU

Working pressure: Vacuum to 50 bar

Working Temperatures: -40 to 100 degree Celcius

Hardness 65 Shore D



PRICE LIST

MODEL	SIZE	PRICE/MTR
PA	425	15
PA	640	24
PA	860	34
PA	1080	58
PA	1290	84



KEY PROCEDURE TO ORDER
Cylinder Name and Series > Dia & Stroke

ISO 15552 MAGNETIC CYLINDER C24



ACTION TYPE: Double Acting

OPERATING PRESSURE: 1-10 Kg/cm²

FLUID TYPE: Compressed Air, Lubricated & Filtered

CUSHION: Adjustable At Both Ends

OPERATING TEMPERATURE RANGE: -5 ~ 70°C

DIA (mm)	32	40	50	63	80	100	125
Port Size	G1/8"	G1/4"	G1/4"	G3/8"	G3/8"	G1/2"	G1/2"

▼ DIAMETER IN MM ▼

STROKE ▼	32	40	50	63	80	100	125
25	1794	1988	2623	3149	4372	5549	11701
50	1894	2129	2825	3399	4726	5960	12377
80	1997	2269	3028	3646	5081	6375	13054
100	2096	2410	3228	3891	5435	6786	13731
125	2198	2551	3431	4139	5792	7199	14512
150	2299	2720	3633	4384	6146	7612	15190
175	2400	2831	3835	4634	6503	8026	15866
200	2501	2972	4036	4881	6856	8436	16543
250	2676	3219	4416	5322	7331	9262	17897
300	2848	3461	4767	5747	8020	10088	19251
350	3044	3736	5167	6230	8708	10728	20605
400	3242	4011	5565	6714	9396	11367	21957
450	3441	4287	5960	7197	10086	12165	23415
500	3640	4561	6357	7681	10774	12965	24874
550	3928	4965	6902	8311	11640	13942	26228
600	4216	5369	7446	8940	12508	14920	27583
650	4429	5666	7868	9449	13226	15748	28936
700	4642	5960	8290	9956	13944	16576	30289
750	4855	6258	8712	10464	14664	17405	31642
800	5067	6554	9133	10971	15382	18234	32996
850	5281	6851	9557	11482	16099	19063	34350
900	5492	7148	9977	11990	16816	19890	35704
950	5708	7444	10399	12497	17535	20721	37058
1000	5920	7741	10820	13005	18253	21549	38410

*DOUBLE ENDED CYLINDER PRICE ON REQUEST



KEY PROCEDURE TO ORDER

Cylinder Name and Series > Dia & Stroke



ISO 15552 NON MAGNETIC CYLINDER C25

ACTION TYPE: Double Acting

OPERATING PRESSURE: 1-10 Kg/cm²

FLUID TYPE: Compressed Air, Lubricated & Filtered

CUSHION: Adjustable At Both Ends

OPERATING TEMPERATURE RANGE: -5 ~ 70°C

DIA (mm)	32	40	50	63	80	100	125
Port Size	G1/8"	G1/4"	G1/4"	G3/8"	G3/8"	G1/2"	G1/2"

▼ DIAMETER IN MM ▼

STROKE ▼	32	40	50	63	80	100	125
25	1653	1823	2440	2939	4120	5264	11280
50	1751	1965	2643	3184	4476	5676	11956
80	1861	2102	2845	3431	4832	6089	12633
100	1959	2244	3044	3677	5187	6503	13310
125	2058	2386	3245	3924	5544	6915	14091
150	2162	2524	3449	4170	5899	7328	14769
175	2261	2666	3650	4421	6255	7741	15446
200	2358	2808	3852	4668	6610	8153	16123
250	2539	3054	4233	5106	7080	8980	17475
300	2710	3295	4585	5533	7769	9803	18829
350	2906	3571	4983	6027	8459	10443	20184
400	3103	3847	5379	6501	9148	11082	21537
450	3300	4120	5796	6985	9837	11882	22996
500	3498	4395	6173	7469	10524	12681	24454
550	3787	4800	6716	8099	11393	13657	25807
600	4077	5205	7261	8728	12263	14632	27160
650	4290	5499	7682	9237	12979	15461	28514
700	4504	5793	8104	9746	13697	16290	29869
750	4715	6087	8528	10251	14416	17120	31222
800	4925	6381	8950	10758	15135	17948	32574
850	5141	6675	9372	11267	15852	18777	33929
900	5357	6964	9794	11775	16569	19606	35282
950	5570	7258	10216	12282	17287	20435	36636
1000	5784	7466	10637	12788	18005	21263	37990
Seal Kit	625	740	955	1039	1181	1323	2413

KEY PROCEDURE TO ORDER

Cylinder Name and Series > Dia & Stroke



TIE ROD ISO 15552 MAGNETIC CYLINDER C14

ACTION TYPE: Double Acting

OPERATING PRESSURE: 1-10 Kg/cm²

FLUID TYPE: Compressed Air, Lubricated & Filtered

CUSHION: Adjustable At Both Ends

OPERATING TEMPERATURE RANGE: -5 ~ 70°C

DIA (mm)	32	40	50	63	80	100	125
Port Size	G1/8"	G1/4"	G1/4"	G3/8"	G3/8"	G1/2"	G1/2"

▼ DIAMETER IN MM ▼							
STROKE ▼	32	40	50	63	80	100	125
25	1649	1779	2299	2618	3593	4688	8498
50	1749	1913	2516	2838	3909	5056	8953
80	1796	2049	2678	3045	4215	5423	9515
100	1912	2169	2831	3274	4491	5720	9929
125	2039	2276	2955	3371	4677	5895	10424
150	2122	2405	3138	3584	4925	6165	11098
175	2235	2485	3289	3801	5210	6513	11369
200	2317	2619	3463	4007	5442	6782	11926
250	2427	2785	3692	4132	5727	7371	13001
300	2583	2947	3943	4475	6167	7985	13946
350	2768	3188	4261	4868	6668	8299	14892
400	2955	3393	4574	5259	7167	8789	15968
450	3111	3609	4822	5478	7651	9222	16937
500	3234	3789	5109	5750	8135	9662	17906
550	3480	4040	5452	6233	8495	10253	18919
600	3725	4289	5794	6715	8858	10844	19934
650	3924	4524	6098	7069	9312	11507	20900
700	4121	4761	6400	7422	9766	12168	21865
750	4251	4935	6648	7644	10225	12799	22910
800	4379	5108	6894	7866	10682	13430	23952
850	4575	5243	7215	8237	11051	14125	24930
900	4770	5378	7535	8610	11419	14821	25908
950	4869	5602	7954	8980	11872	15746	26983
1000	4970	5827	8375	9349	12325	16672	28058

KEY PROCEDURE TO ORDER

Cylinder Name and Series > Dia & Stroke



TIE ROD ISO 15552 NON MAGNETIC CYLINDER C15

ACTION TYPE: Double Acting

OPERATING PRESSURE: 1-10 Kg/cm²

FLUID TYPE: Compressed Air, Lubricated & Filtered

CUSHION: Adjustable At Both Ends

OPERATING TEMPERATURE RANGE: -5 ~ 70°C

DIA (mm)	32	40	50	63	80	100	125
Port Size	G1/8"	G1/4"	G1/4"	G3/8"	G3/8"	G1/2"	G1/2"

▼ DIAMETER IN MM ▼							
STROKE ▼	32	40	50	63	80	100	125
25	1527	1647	2129	2424	3327	4341	7868
50	1620	1771	2330	2628	3619	4681	8290
80	1663	1897	2480	2820	3903	5021	8810
100	1770	2009	2621	3032	4158	5296	9193
125	1888	2107	2736	3121	4330	5458	9652
150	1965	2227	2906	3319	4560	5708	10276
175	2069	2301	3046	3519	4824	6030	10527
200	2145	2425	3206	3710	5039	6279	11042
250	2247	2579	3418	3826	5303	6825	12038
300	2392	2729	3651	4143	5710	7393	12913
350	2563	2952	3945	4507	6174	7685	13788
400	2736	3142	4235	4870	6636	8138	14785
450	2880	3342	4465	5073	7085	8539	15682
500	2994	3508	4731	5324	7532	8946	16579
550	3222	3741	5048	5771	7866	9494	17518
600	3449	3971	5365	6217	8202	10041	18457
650	3633	4189	5646	6545	8622	10654	19352
700	3815	4408	5926	6872	9043	11267	20246
750	3936	4569	6155	7078	9467	11851	21213
800	4055	4730	6384	7283	9891	12435	22177
850	4236	4855	6681	7627	10232	13078	23084
900	4416	4980	6977	7973	10573	13723	23989
950	4508	5187	7365	8314	10993	14580	24984
1000	4602	5395	7755	8656	11412	15437	25980

*DOUBLE ENDED CYLINDER PRICE ON REQUEST.



KEY PROCEDURE TO ORDER

Cylinder Name and Series > Dia & Stroke



TIE ROD MAGNETIC CYLINDER C28

ACTION TYPE: Double Acting

OPERATING PRESSURE: 1-10 Kgf/cm²

FLUID TYPE: Compressed Air, Lubricated & Filtered

CUSHION: Adjustable At Both Ends

OPERATING TEMPERATURE RANGE: -5 ~ 70°C

DIA (mm)	32	40	50	63	80	100	125	160	200	250
Port Size	G1/8"	G1/4"	G1/4"	G3/8"	G3/8"	G1/2"	G1/2"	G3/4"	G3/4"	G1"

▼ DIAMETER IN MM ▼

STROKE ▼	32	40	50	63	80	100	125	160	200	250
25	1545	1716	1876	2373	3564	4182	6841	-	-	42163
50	1611	1793	1969	2533	3757	4430	7172	12413	18328	42637
80	1699	1893	2091	2727	3994	4734	7586	12908	19567	43011
100	1743	1954	2168	2858	4149	4938	7845	13244	20309	44861
125	1809	2003	2231	3018	4342	5181	8192	13656	21382	45910
150	1898	2113	2366	3244	4617	5528	8662	14236	22825	45995
175	1981	2163	2439	3359	4772	5732	8854	14482	23441	47878
200	2020	2246	2521	3498	4926	5931	9185	14897	24371	48748
250	2168	2405	2714	3818	5318	6427	9986	16179	25315	51173
300	2307	2565	2908	4138	5715	6924	10675	17103	27267	53519
350	2449	2726	3106	4452	6102	7415	11365	18021	28960	55445
400	2599	2891	3305	4772	6493	7922	12082	18938	30782	57328
450	2748	3050	3558	5092	6885	8419	12782	19872	32578	59247
500	2886	3288	3763	5418	7272	8915	13478	20909	34415	61115
550	2890	3290	3776	5462	7298	8964	13485	20937	36511	63215
600	3031	3447	3967	5763	7671	9436	14134	21960	38587	65295
650	3166	3605	4154	6069	8042	9915	14790	22875	40313	67428
700	3300	3762	4340	6373	8411	10393	15447	23789	42319	69560
750	3434	3920	4606	6676	8785	10863	16115	24702	44152	71780
800	3568	4077	4871	6977	9158	11333	16782	25619	46149	73885
850	3710	4233	5007	7288	9531	11809	17447	26531	47798	76038
900	3851	4387	5144	7598	9904	12285	18111	27442	49686	78162
950	3986	4543	5336	7890	10274	12757	18768	28357	51566	80311
1000	4119	4698	5527	8180	10645	13230	19424	29271	53390	82430
SEAL KIT	349	575	460	533	626	861	1383	2405	3224	4715



KEY PROCEDURE TO ORDER

Cylinder Name and Series > Dia & Stroke



TIE ROD NON MAGNETIC CYLINDER C29

ACTION TYPE: Double Acting

OPERATING PRESSURE: 1-10 Kg/cm²

FLUID TYPE: Compressed Air, Lubricated & Filtered

CUSHION: Adjustable At Both Ends

OPERATING TEMPERATURE RANGE: -5 ~ 70°C

DIA (mm)	32	40	50	63	80	100	125	160	200	250
Port Size	G1/8"	G1/4"	G1/4"	G3/8"	G3/8"	G1/2"	G1/2"	G3/4"	G3/4"	G1"

▼ DIAMETER IN MM ▼

STROKE ▼	32	40	50	63	80	100	125	160	200	250
25	1396	1550	1682	2124	3278	3851	6048	-	-	39312
50	1467	1629	1777	2285	3470	4099	6368	11376	16077	39787
80	1553	1726	1898	2479	3707	4403	6751	11872	17164	40160
100	1600	1787	1976	2609	3862	4607	7003	12207	17815	42011
125	1659	1939	2038	2770	4055	4852	7325	12617	18757	43059
150	1754	1946	2172	2996	4330	5197	7771	13199	20022	43145
175	1837	1997	2246	3111	4485	5401	7960	13443	20562	45027
200	1843	2079	2329	3249	4639	5600	8280	13860	21379	45898
250	2023	2240	2521	3570	5031	6096	9032	15142	22207	48322
300	2158	2399	2719	3889	5423	6593	9693	16065	23919	50668
350	2299	2560	2913	4204	5809	7084	10351	16983	25404	52595
400	2444	2720	3111	4524	6201	7581	11013	17901	27002	54477
450	2593	2880	3366	4844	6593	8077	11675	18818	28578	56397
500	2730	3117	3564	5164	6973	8574	12337	19741	30189	58265
550	2739	3126	3584	5221	7014	8638	12983	19879	32028	60365
600	2878	3283	3773	5522	7388	9111	13630	20956	33848	62445
650	3012	3439	3960	5826	7759	9583	14291	21822	35363	64577
700	3146	3594	4145	6132	8128	10057	14954	22687	37122	66710
750	3283	3751	4359	6435	8502	10527	15605	23652	38730	68929
800	3420	3909	4572	6736	8874	10996	16257	24615	40481	71035
850	3558	4064	4761	7040	9245	11470	16922	25527	41928	73187
900	3696	4758	4950	7346	9616	11942	17586	26439	43584	75311
950	3832	4219	5139	7640	9986	12416	18242	27350	45233	77461
1000	3969	4530	5328	7934	10356	12888	18899	28267	46834	79580
SEAL KIT	291	383	444	480	522	718	1098	2004	2687	4715



KEY PROCEDURE TO ORDER
Cylinder Name and Series > Dia & Stroke

NOTE: M - MALE THREAD



ISO COMPACT CYLINDER C64 & C65

ACTION TYPE: Double Acting

OPERATING PRESSURE: 1-10 Kg/cm²

FLUID TYPE: Compressed Air, Lubricated & Filtered

OPERATING TEMPERATURE RANGE: -5 ~ 70°C

DIA (mm)	16	20	25	32	40	50	63	80
Port Size	M5	M5	M5	G1/8"	G1/4"	G1/4"	G3/8"	G3/8"

ISO COMPACT MAGNETIC CYLINDER C64

▼ DIAMETER IN MM ▼

STROKE ▼	16	20	25	32	40	50	63	80
10	1661	1697	1785	1927	2406	2847	3795	5154
15	1693	1729	1819	1933	2455	2905	3882	5264
20	1725	1763	1856	2003	2505	2962	3968	5377
25	1776	1816	1911	2065	2555	3034	4052	5464
30	1793	1833	1927	2082	2606	3077	4138	5597
40	1862	1903	2002	2161	2704	3194	4295	5817
50	1928	1971	2073	2240	2805	3312	4481	6043
60	1996	2040	2146	2318	2906	3429	4652	6262
70	2108	2155	2266	2449	3067	3611	4921	6612
80	2131	2176	2290	2473	3104	3659	4996	6705

ISO COMPACT NON MAGNETIC CYLINDER C65

▼ DIAMETER IN MM ▼

STROKE ▼	16	20	25	32	40	50	63	80
10	1595	1629	1714	1850	2309	2733	3643	4948
15	1625	1660	1747	1856	2357	2788	3727	5054
20	1656	1693	1782	1923	2405	2843	3809	5162
25	1705	1743	1835	1982	2452	2913	3890	5245
30	1721	1760	1850	1999	2502	2954	3972	5373
40	1787	1827	1922	2075	2596	3066	4123	5584
50	1851	1892	1990	2151	2693	3179	4301	5801
60	1916	1958	2060	2226	2789	3292	4466	6012
70	2024	2070	2175	2351	2945	3467	4724	6348
80	2046	2090	2198	2473	2980	3513	4796	6437
SEAL KIT	426	503	579	664	834	904	1073	1268

*DOUBLE ENDED CYLINDER PRICE ON REQUEST.

KEY PROCEDURE TO ORDER

Cylinder Name and Series > Dia & Stroke

NOTE: M - MALE THREAD

ISO COMPACT CYLINDER C64L



ACTION TYPE: Double Acting

OPERATING PRESSURE: 1-10 Kg/cm²

FLUID TYPE: Compressed Air, Lubricated & Filtered

OPERATING TEMPERATURE RANGE: -5 ~ 70°C

DIA (mm)	16	20	25	32	40	50	63	80
Port Size	M5	M5	M5	G1/8"	G1/8"	G1/8"	G1/8"	G1/8"

▼ DIAMETER IN MM ▼

STROKE ▼	16	20	25	32	40	50	63	80
10	2655	2713	2852	3083	3846	4553	6069	8241
15	2707	2763	2908	3091	3925	4642	6206	8417
20	2759	2820	2969	3203	4005	4736	6345	8595
25	2840	2903	3057	3299	4083	4852	6479	8773
30	2868	2931	3083	3328	4168	4920	6615	8949
40	2978	3044	3202	3456	4325	5107	6868	9300
50	3084	3151	3315	3582	4485	5295	7164	9660
60	3192	3261	3431	3706	4646	5482	7438	10011
70	3371	3444	3623	3915	4904	5774	7868	10572
80	3405	3479	3661	3955	4962	5851	7988	10720

KEY PROCEDURE TO ORDER

Cylinder Name and Series > Dia & Stroke

NOTE: M - MALE THREAD



ISO COMPACT CYLINDER C66 (ADN TYPE) MAGNETIC

▼ DIAMETER IN MM ▼

STROKE ▼	12	16	20	25	32	40	50
10	1661	1661	1697	1785	1927	2406	2847
15	1693	1693	1729	1819	1933	2455	2905
20	1725	1725	1763	1856	2003	2505	2962
25	1776	1776	1816	1911	2065	2555	3034
30	1793	1793	1833	1927	2082	2606	3077
40	1862	1862	1903	2002	2161	2704	3194
50	1928	1928	1971	2073	2240	2805	3312
60	1996	1996	2040	2146	2318	2906	3429
70	2108	2108	2155	2266	2449	3067	3611
80	2131	2131	2176	2290	2473	3104	3659

KEY PROCEDURE TO ORDER

Cylinder Name and Series > Dia & Stroke

NOTE: M - MALE THREAD



COMPACT MAGNETIC CYLINDER C04

ACTION TYPE: Double Acting

OPERATING PRESSURE: 1-10 Kgf/cm²

FLUID TYPE: Compressed Air, Lubricated & Filtered

OPERATING TEMPERATURE RANGE: -5 ~ 70°C

DIA (mm)	16	20	25	32	40	50	63	80	100
Port Size	M5x0.8	M5x0.8	M5x0.8	G1/8"	G1/8"	G1/4"	G1/4"	G3/8"	G3/8"

▼ DIAMETER IN MM ▼									
STROKE ▼	16	20	25	32	40	50	63	80	100
5	1061	1100	1259	1449	1728	2129	2522	3758	4980
10	1080	1121	1283	1460	1748	2149	2538	3806	5161
15	1096	1137	1328	1514	1768	2196	2574	3921	5271
20	1111	1177	1387	1541	1802	2252	2658	3997	5457
25	1160	1206	1433	1582	1841	2305	2727	4191	5602
30	1199	1246	1511	1617	1880	2373	2795	4421	5788
35	1270	1321	1548	1671	1916	2454	2865	4578	5934
40	1335	1387	1578	1698	1971	2520	2949	4731	6083
45	1374	1427	1616	1729	2030	2602	3032	4851	6376
50	1476	1536	1657	1765	2090	2669	3095	4887	6783
55	1604	1641	1729	1932	2180	2735	3172	5001	6926
60	1739	1748	1798	1971	2273	2763	3254	5078	7038
65	-	-	1866	2065	2374	2845	3339	5155	7185
70	-	-	1934	2160	2481	2957	3400	5237	7296
75	-	-	2002	2254	2588	3069	3461	5311	7445
80	-	-	2071	2349	2695	3182	3522	5387	7589
85	-	-	2139	2443	2802	3294	3583	5462	7734
90	-	-	2207	2538	2910	3406	3644	5538	7879
95	-	-	2275	2632	3017	3519	3704	5613	8024
100	-	-	2344	2727	3124	3631	3765	5689	8169
105	-	-	2412	2821	3231	3743	3826	5765	8314
110	-	-	2480	2916	3338	3856	3887	5840	8459
SEAL KIT	204	233	256	291	364	452	553	626	709

*DOUBLE ENDED CYLINDER PRICE ON REQUEST

KEY PROCEDURE TO ORDER

Cylinder Name and Series > Dia & Stroke

NOTE: M - MALE THREAD



COMPACT NON MAGNETIC CYLINDER C05

ACTION TYPE: Double Acting

OPERATING PRESSURE: 1-10 Kg/cm²

FLUID TYPE: Compressed Air, Lubricated & Filtered

OPERATING TEMPERATURE RANGE: -5 ~ 70°C

DIA (mm)	16	20	25	32	40	50	63	80	100
Port Size	M5x0.8	M5x0.8	M5x0.8	G1/8"	G1/8"	G1/4"	G1/4"	G3/8"	G3/8"

▼ DIAMETER IN MM ▼									
STROKE ▼	16	20	25	32	40	50	63	80	100
5	940	981	1125	1305	1553	1922	2295	3467	4330
10	958	999	1148	1308	1555	1946	2316	3521	4488
15	977	1017	1195	1362	1596	1994	2352	3635	4583
20	990	1058	1253	1390	1630	2048	2436	3711	4745
25	1040	1086	1299	1430	1670	2102	2504	3906	4871
30	1080	1125	1377	1465	1709	2170	2574	4136	5033
35	1150	1200	1415	1519	1745	2251	2643	4291	5160
40	1215	1267	1445	1546	1799	2317	2728	4445	5289
45	1253	1308	1484	1577	1858	2399	2810	4565	5544
50	1355	1415	1524	1613	1920	2466	2873	4601	5898
55	1484	1521	1596	1780	2008	2532	2950	4717	6023
60	1618	1628	1665	1818	2102	2560	3033	4792	6120
65	-	-	1735	1913	2202	2642	3117	4870	6248
70	-	-	1804	2008	2310	2754	3178	4951	6345
75	-	-	1873	2102	2417	2867	3240	5025	6473
80	-	-	1943	2197	2524	2979	3302	5102	6599
85	-	-	2012	2291	2631	3091	3364	5179	6725
90	-	-	2081	2386	2738	3204	3426	5255	6851
95	-	-	2150	2480	2846	3316	3488	5332	6977
100	-	-	2220	2575	2953	3428	3550	5409	7103
105	-	-	2289	2669	3060	3541	3612	5485	7229
110	-	-	2358	2764	3167	3653	3674	5562	7355

*DOUBLE ENDED CYLINDER PRICE ON REQUEST



KEY PROCEDURE TO ORDER

Cylinder Name and Series > Dia & Stroke

NOTE: M - MALE THREAD



COMPACT MAGNETIC CYLINDER C08 (CQ2 TYPE)

ACTION TYPE: Double Acting

OPERATING PRESSURE: 1-10 Kgf/cm²

FLUID TYPE: Compressed Air, Lubricated & Filtered

OPERATING TEMPERATURE RANGE: -5 ~ 70°C

DIA (mm)	16	20	25	32	40	50	63	80	100
Port Size	M5x0.8	M5x0.8	M5x0.8	G1/8"	G1/8"	G1/4"	G1/4"	G3/8"	G3/8"

▼ DIAMETER IN MM ▼								
STROKE ▼	20	25	32	40	50	63	80	100
5	1200	1376	1547	1853	2277	2635	3898	5550
10	1224	1418	1578	1890	2343	2700	4024	5752
15	1243	1456	1637	1934	2394	2738	4147	5877
20	1286	1517	1666	1971	2455	2827	4231	6086
25	1316	1570	1712	2017	2515	2902	4437	6247
30	1362	1657	1748	2059	2588	2975	4682	6456
35	1443	1696	1809	2098	2678	3051	4849	6619
40	1517	1729	1839	2158	2753	3140	5015	6788
45	1562	1772	1872	2225	2842	3229	5182	7118
50	1682	1815	1911	2292	2917	3296	5303	7572
55	-	-	1950	2388	2990	3376	5385	7736
60	-	-	1989	2491	3021	3468	5469	7862
65	-	-	2028	2595	3052	3556	5554	8026
70	-	-	2066	2697	3084	3622	5634	8152
75	-	-	2105	2800	3115	3689	5717	8315
80	-	-	2144	2903	3147	3755	5798	8478
85	-	-	2183	3006	3178	3821	5880	8640
90	-	-	2222	3109	3210	3887	5962	8803
95	-	-	2261	3212	3241	3953	6044	8966
100	-	-	2300	3315	3273	4019	6126	9129
SEAL KIT	204	233	256	291	364	452	553	626

*DOUBLE ENDED CYLINDER PRICE ON REQUEST



KEY PROCEDURE TO ORDER

Cylinder Name and Series > Dia & Stroke

NOTE: M - MALE THREAD



COMPACT NON MAGNETIC CYLINDER C09 (CQ2 TYPE)

ACTION TYPE: Double Acting

OPERATING PRESSURE: 1-10 Kg/cm²

FLUID TYPE: Compressed Air, Lubricated & Filtered

OPERATING TEMPERATURE RANGE: -5 ~ 70°C

DIA (mm)	16	20	25	32	40	50	63	80	100
Port Size	M5x0.8	M5x0.8	M5x0.8	G1/8"	G1/8"	G1/4"	G1/4"	G3/8"	G3/8"

▼ DIAMETER IN MM ▼								
STROKE ▼	20	25	32	40	50	63	80	100
5	1071	1230	1385	1664	2061	2386	3600	5198
10	1095	1266	1413	1700	2126	2451	3726	5401
15	1112	1306	1472	1743	2177	2490	3848	5524
20	1154	1372	1502	1783	2239	2577	3928	5730
25	1186	1421	1547	1826	2297	2651	4135	5890
30	1230	1504	1583	1867	2370	2725	4378	6097
35	1311	1547	1641	1906	2459	2799	4542	6259
40	1385	1580	1672	1966	2534	2886	4706	6423
45	1428	1620	1706	2032	2621	2975	4834	6751
50	1547	1664	1743	2098	2696	3040	4869	7201
55			1780	2195	2768	3120	4991	7363
60			1817	2297	2799	3210	5073	7488
65			1853	2399	2937	3364	5260	7805
70			1890	2501	3019	3433	5347	7933
75			1927	2603	3101	3538	5429	8099
80			1964	2705	3132	3642	5511	8264
85			2000	2807	3164	3744	5594	8430
90			2037	2909	3195	3847	5677	8596
95			2074	3010	3227	3950	5760	8762
100			2111	3112	3258	4053	5843	8928

*DOUBLE ENDED CYLINDER PRICE ON REQUEST



KEY PROCEDURE TO ORDER

Cylinder Name and Series > Dia & Stroke

NOTE: M - MALE THREAD

COMPACT MAGNETIC CYLINDER C08L (CQ2 TYPE NON ROTATING)

ACTION TYPE: Double Acting

OPERATING PRESSURE: 1-10 Kg/cm²

FLUID TYPE: Compressed Air, Lubricated & Filtered

OPERATING TEMPERATURE RANGE: -5 ~ 70°C

DIA (mm)	16	20	25	32	40	50	63	80
Port Size	M5x0.8	M5x0.8	M5x0.8	G1/8"	G1/8"	G1/4"	G1/4"	G3/8"

▼ DIAMETER IN MM ▼							
STROKE ▼	20	25	32	40	50	63	80
5	2217	2443	2703	3294	3983	4909	6986
10	2258	2506	2736	3360	4081	5025	7177
15	2300	2569	2837	3434	4169	5115	7365
20	2374	2663	2901	3500	4273	5254	7540
25	2414	2725	2958	3578	4359	5380	7790
30	2502	2857	3043	3679	4502	5548	8165
35	2623	2938	3151	3778	4661	5734	8466
40	2739	3014	3226	3898	4806	5927	8764
45	2851	3129	3338	4061	5005	6175	9142
50	2985	3186	3393	4150	5108	6288	9318



KEY PROCEDURE TO ORDER

Cylinder Name and Series > Dia & Stroke



ALUMINIUM ROUND MAGNETIC CYLINDER C44

ACTION TYPE: Double Acting

OPERATING PRESSURE: 1-10 Kgf/cm²

FLUID TYPE: Compressed Air, Lubricated & Filtered

OPERATING TEMPERATURE RANGE: -5 ~ 70°C

DIA (mm)	16	20	25	32	40
Port Size	M5	G1/8"	G1/8"	G1/8"	G1/4"

▼ DIAMETER IN MM ▼					
STROKE ▼	16	20	25	32	40
25	1165	1226	1327	1611	2160
50	1201	1264	1389	1652	2224
75	1268	1335	1463	1731	2323
100	1295	1363	1553	1814	2400
125	1359	1431	1615	1904	2492
150	1423	1498	1716	1984	2600
175	1464	1541	1793	2051	2678
200	1527	1607	1913	2160	2800
225	1578	1661	2040	2226	2905
250	1632	1718	2082	2305	2984
300	1686	1775	2226	2464	3223
350	1885	1984	2371	2639	3410
400	2004	2110	2491	2736	3651
450	-	2296	2609	2834	3891
500	-	2359	2728	2932	4132
550	-	2484	2847	3029	4372
600	-	2609	2965	3127	4613
Seal Kit	350	583	645	715	780

KEY PROCEDURE TO ORDER

Cylinder Name and Series > Dia & Stroke



ALUMINIUM ROUND NON MAGNETIC CYLINDER C45

ACTION TYPE: Double Acting

OPERATING PRESSURE: 1-10 Kgf/cm²

FLUID TYPE: Compressed Air, Lubricated & Filtered

OPERATING TEMPERATURE RANGE: -5 ~ 70°c

DIA (mm)	16	20	25	32	40
Port Size	M5	G1/8"	G1/8"	G1/8"	G1/4"

▼ DIAMETER IN MM ▼					
STROKE ▼	16	20	25	32	40
25	942	1047	1138	1360	1819
50	969	1077	1191	1391	1878
75	1025	1138	1250	1458	1932
100	1047	1164	1330	1528	2020
125	1098	1219	1385	1607	2100
150	1148	1275	1467	1673	2190
175	1184	1316	1538	1738	2258
200	1231	1368	1639	1819	2361
225	1281	1423	1757	1877	2449
250	1328	1476	1779	1946	2517
300	1375	1528	1907	2080	2718
350		1580	2036	2214	2918
400		1633	2164	2349	3119
450		1685	2292	2483	3319
500		1738	2420	2618	3520
550		1790	2548	2752	3720
600		1843	2676	2886	3921

KEY PROCEDURE TO ORDER

Cylinder Name and Series > Dia & Stroke



SS ROUND MAGNETIC CYLINDER C52

ACTION TYPE: Double Acting

OPERATING PRESSURE: 1-10 Kg/cm²

FLUID TYPE: Compressed Air, Lubricated & Filtered

OPERATING TEMPERATURE RANGE: -5 ~ 70°c

DIA (mm)	16	20	25	32	40	50
Port Size	M5	G1/8"	G1/8"	G1/8"	G1/4"	G1/4"

▼ DIAMETER IN MM ▼

STROKE ▼	16	20	25	32	40	50
25	1290	1482	1567	1763	2028	4199
50	1358	1523	1641	1846	2123	4365
75	1403	1560	1694	1906	2192	4532
100	1448	1583	1747	1958	2242	4699
125	1468	1610	1802	1998	2298	4865
150	1501	1637	1857	2023	2326	5033
175	1583	1665	1914	2073	2384	5198
200	1666	1702	1970	2116	2434	5364
225		1739	2025	2161	2484	5531
250		1776	2081	2205	2535	5698
275		1812	2137	2249	2585	5865
300		1849	2192	2293	2636	6032



KEY PROCEDURE TO ORDER
Cylinder Name and Series > Dia & Stroke



SS ROUND NON MAGNETIC CYLINDER C53

ACTION TYPE: Double Acting

OPERATING PRESSURE: 1-10 Kgf/cm²

FLUID TYPE: Compressed Air, Lubricated & Filtered

OPERATING TEMPERATURE RANGE: -5 ~ 70°c

DIA (mm)	16	20	25	32	40	50
Port Size	M5	G1/8"	G1/8"	G1/8"	G1/4"	G1/4"

▼ DIAMETER IN MM ▼

STROKE ▼	16	20	25	32	40	50
25	1225	1408	1489	1675	1926	3936
50	1291	1447	1559	1754	2017	4102
75	1333	1482	1609	1811	2082	4269
100	1375	1504	1662	1866	2136	4436
125	1395	1537	1687	1898	2183	4602
150	1426	1571	1708	1922	2210	4769
175	1504	1605	1751	1969	2265	4935
200	1581	1640	1787	2011	2312	5102
225		1675	1824	2052	2359	5269
250		1701	1861	2093	2407	5436
275		1744	1897	2134	2454	5603
300		1779	1934	2175	2501	5770

KEY PROCEDURE TO ORDER
Cylinder Name and Series > Dia & Stroke



MICKY MOUSE MAGNETIC CYLINDER C72

ACTION TYPE: Double Acting

OPERATING PRESSURE: 1-10 Kg/cm²

FLUID TYPE: Compressed Air, Lubricated & Filtered

CUSHION: Adjustable At Both Ends

OPERATING TEMPERATURE RANGE: -5 ~ 70°C

DIA (mm)	32	40	50	63	80	100
Port Size	G1/8"	G1/4"	G1/4"	G3/8"	G3/8"	G1/2"

▼ DIAMETER IN MM ▼						
STROKE ▼	32	40	50	63	80	100
25	1828	2059	2216	2795	4249	4889
50	1933	2128	2339	3010	4432	5187
80	2043	2248	2521	3224	4555	5426
100	2087	2348	2584	3409	4800	5727
125	2166	2401	2644	3593	4924	6146
150	2226	2494	2764	3653	5229	6327
175	2320	2556	2978	3775	5413	6566
200	2379	2617	3104	4020	5658	6926
250	2548	2856	3358	4271	6087	7286
300	2706	3014	3610	4491	6340	8005
350	2801	3204	3737	4651	6720	8632
400	2865	3457	3990	4904	6846	8757
450	3054	3677	4371	5157	7354	9443
500	3119	3741	4560	5284	7479	9698
550	3463	4123	4999	5822	8221	10684
600	3764	4482	5436	6331	8944	11625
650	4067	4842	5874	6841	9668	12567
700	4368	5201	6310	7350	10390	13508
750	4669	5561	6747	7860	11114	14449
800	4972	5920	7183	8367	11837	15390
850	5384	6280	7621	8877	12560	16331
900	5575	6640	8064	9386	13283	17272
950	5878	6999	8495	9896	14007	18213
1000	6179	7360	8932	10405	14730	19154
SEAL KIT	349	575	460	533	626	861

*DOUBLE ENDED CYLINDER PRICE ON REQUEST

KEY PROCEDURE TO ORDER
Cylinder Name and Series > Dia & Stroke



MICKY MOUSE NON MAGNETIC CYLINDER C73

ACTION TYPE: Double Acting

OPERATING PRESSURE: 1-10 Kg/cm²

FLUID TYPE: Compressed Air, Lubricated & Filtered

CUSHION: Adjustable At Both Ends

OPERATING TEMPERATURE RANGE: -5 ~ 70°C

DIA (mm)	32	40	50	63	80	100
Port Size	G1/8"	G1/4"	G1/4"	G3/8"	G3/8"	G1/2"

▼ DIAMETER IN MM ▼						
STROKE ▼	32	40	50	63	80	100
25	1685	1894	2022	2574	3984	4557
50	1790	1961	2146	2790	4167	4856
80	1900	2083	2329	3004	4290	5095
100	1944	2182	2391	3188	4535	5396
125	2022	2237	2452	3372	4659	5815
150	2083	2329	2574	3432	4964	5996
175	2176	2391	2784	3554	5148	6235
200	2237	2452	2910	3799	5393	6595
250	2404	2690	3165	4050	5822	6955
300	2564	2849	3417	4271	6075	7674
350	2658	3037	3544	4430	6455	8301
400	2722	3292	3798	4683	6581	8426
450	2910	3513	4177	4937	7089	9112
500	2975	3576	4367	5064	7215	9367
550	3320	3956	4807	5601	7956	10353
600	3622	4316	5243	6110	8679	11294
650	3924	4676	5680	6620	9403	12236
700	4225	5035	6116	7129	10125	13177
750	4528	5396	6554	7639	10849	14118
800	4829	5756	6991	8147	11572	15059
850	5131	6115	7428	8657	12295	16000
900	5432	6475	7865	9166	13018	16941
950	5734	6834	8301	9676	13743	17882
1000	6036	7194	8739	10185	14466	18823

*DOUBLE ENDED CYLINDER PRICE ON REQUEST

KEY PROCEDURE TO ORDER

Cylinder Name and Series > Dia & Stroke



GRIPPER CYLINDER

ACTION TYPE: Double Acting

OPERATING PRESSURE: 1-10 Kg/cm²

FLUID TYPE: Compressed Air, Lubricated & Filtered

OPERATING TEMPERATURE RANGE: -5 ~ 70°C

MODEL	LIST PRICE
XHZ2-10	2250
XHZ2-16	2250
XHZ2-20	3150
XHZ2-25	4550
XHZ2-32	6880
XHZ2-40	9570


TWIN ROD CYLINDER (MAGNETIC)



MODEL	DESCRIPTION			
SIZE	TN Series Twin Rod Cylinder (Magnetic)			
BORE STROKE	16	20	25	32
10	2363	2615	3171	5051
25	2436	2714	3476	5182
40	2762	2835	3591	5355
50	2888	2998	3838	5670
80	3245	3738	4043	6510
100	3444	3990	4263	6836

KEY PROCEDURE TO ORDER

Cylinder Name and Series > Dia & Stroke

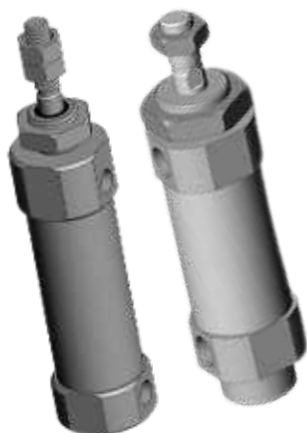

MAGNETIC CYLINDER C55 (CM2/CJ2)

ACTION TYPE: Double Acting

OPERATING PRESSURE: 1-10 Kgf/cm²


FLUID TYPE: Compressed Air, Lubricated & Filtered

OPERATING TEMPERATURE RANGE: -5 ~ 70°C

	▼ DIAMETER IN MM ▼			
STROKE ▼	12	16	20	25
25	1228	1228	1411	1493
50	1294	1294	1450	1563
75	1336	1336	1486	1613
100	1379	1379	1508	1664
125	1398	1398	1533	1716
150	1429	1429	15559	1769
175	1508	1508	1586	1823
200	1587	1587	1621	1876
225			1656	1929
250			1691	1982
275			1726	2035
300			1761	2088

KEY PROCEDURE TO ORDER

Cylinder Name and Series > Dia & Stroke

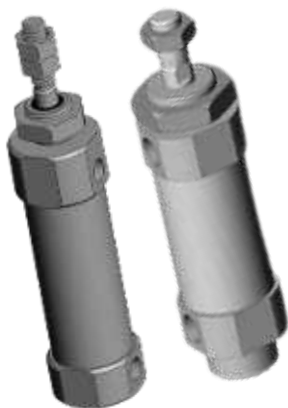

MAGNETIC CYLINDER C56 (CM2/CJ2)

ACTION TYPE: Double Acting

OPERATING PRESSURE: 1-10 Kgf/cm²

FLUID TYPE: Compressed Air, Lubricated & Filtered

OPERATING TEMPERATURE RANGE: -5 ~ 70°C

	▼ DIAMETER IN MM ▼			
STROKE ▼	12	16	20	25
25	1167	1167	1340	1418
50	1229	1229	1378	1485
75	1269	1269	1412	1533
100	1310	1310	1432	1583
125	1328	1328	1462	1607
150	1358	1358	1495	1627
175	1432	1432	1529	1667
200	1506	1506	1562	1702
225			1595	1737
250			1620	1772
275			1661	1807
300			1694	1842



C28 & C29 MALE CLEVIS MOUNTING

ITEM CODE	CA - 32	CA - 40	CA - 50	CA - 63	CA - 80	CA - 100	CA - 125
PRICE	330	425	510	596	830	1020	1995



C28 & C29 FEMALE CLEVIS MOUNTING

ITEM CODE	CB - 32	CB - 40	CB - 50	CB - 63	CB - 80	CB - 100	CB - 125
PRICE	348	394	467	572	765	916	2281



MOUNTING FOR C28/C29

MODEL	CB+PIN-160	CB+PIN-200	CA-160	CA-200
PRICE	2990	4990	2660	4545



C24 & C25 MALE CLEVIS MOUNTING

ITEM CODE	ISO CA 32	ISO CA 40	ISO CA 50	ISO CA 63	ISO CA 80	ISO CA 100	ISO CA 125
PRICE	360	440	545	635	945	1163	2950



C24 & C25 FEMALE CLEVIS MOUNTING

ITEM CODE	ISO CB 32	ISO CB 40	ISO CB 50	ISO CB 63	ISO CB 80	ISO CB 100	ISO CB 125
PRICE	355	432	540	625	902	1058	2526



ROD EYE

SIZE	M8x1.25	10x1.25	12x1.75	16x1.5	20x1.5	27x2
ITEM CODE	PHS-20	PHS-25-32	PHS-40	PHS-50-63	PHS-80-100	PHS-125
PRICE	220	632	790	876	1096	2460



ROD FORK

SIZE	10x1.25	12x1.25	16x1.5	20x1.5	27x2	36x2
ITEM CODE	Y-CLIP-25-32	Y-CLIP-40	Y-CLIP-50-63	Y-CLIP-80-100	Y-CLIP-125	Y-CLIP-160-200
PRICE	358	464	710	1195	3480	5779



ROD ALIGNER

SIZE	10 x 1.25	12 x 1.25	16 x 1.5	20 x 1.5	27 x 2.0	-
ITEM CODE	UJ-25-32	UJ-40	UJ-50-63	UJ-80-100	UJ-125	-
PRICE	708	823	1384	1714	2460	-



ISO MALE CLEVIS 90 DEGREE FOR C24/C25

MODEL	ISO-SDB-32	ISO-SDB-40	ISO-SDB-50	ISO-SDB-63	ISO-SDB-80	ISO-SDB-100
PRICE	310	390	485	580	820	955



C28 & C29 TRUNION

DIA	32	40	50	63	80	100	125	160	200
PRICE	540	654	772	854	1018	1212	2772	5508	10812



C24 & C25 FRONT FLANGE

DIA	32	40	50	63	80	100	125
PRICE	492	594	734	712	1461	1668	2349



C28 & C29 FRONT FLANGE

DIA	32	40	50	63	80	100	125	160	200
PRICE	282	335	492	536	845	1146	2388	3979	5946



CS1 REED SWITCH FOR ISO 15552 CYLINDER C24 & C64 & C64L

₹ 530

CS1-F REED SWITCH FOR TIE ROD CYLINDER C28 & C14

₹ 530

DA93 - REED SWITCH FOR COMPACT CYLINDER C08

₹ 530

CS 1 REED SWITCH 3 meter

₹ 750

CS 1 - J REED SWITCH FOR COMPACT CYLINDER C04

₹ 750



TUBE CUTTER

ITEM CODE

TC

PRICE

210



C28 CLAMP

ITEM CODE

C28 CLAMP 32 mm - 100 mm

C28 CLAMP 125 mm

C45/44 CLAMP

C52/53 CLAMP

PRICE

175

225

145

145



CLAMP C44 & C52

Item Code

Unit Price

M U + 12/16

195

M U + 20/25

215



DIAPHRAGM VALVE

Item Code	Size	Unit Price
UD - 08	1/4"	965
UD - 10	3/8"	1511
UW - 15	1/2"	1865
UW - 20	3/4"	2055
UW - 25	1"	2805
UW - 40	1.5"	6474
UW - 50	2"	8092

NOTE: Available in 220 VAC, 110 VAC, 24 VDC



SPARE COIL

Item Code	Unit Price
UD-08	490
UW - 15/20/25	725
UW - 40/50	2150



FOOT PEDAL VALVE

ITEM CODE	PRICE	DESCRIPTION
TG25J - 08	1675	5/2 FOOT OPERATED VALVE THREAD SIZE - 1/4 INCHES



HAND LEVER VALVE

ITEM CODE	PRICE	DESCRIPTION
TG2521B - 08	840	5/2 HAND LEVER VALVE THREAD SIZE - 1/4 INCHES



DISC ROTARY VALVE

ITEM CODE	PRICE	DESCRIPTION
TG34 S - 08	1025	4/3 WAY DISC ROTARY VALVE SIZE - 1/4 INCHES




SOLENOID VALVE



ITEM CODE	PRICE	DESCRIPTION
TG23-06	720	3/2 SINGLE SOLENOID VALVE THREAD SIZE - 1/8 INCHES
TG22-08	735	2/2 SINGLE SOLENOID VALVE THREAD SIZE - 1/4 INCHES
TG2321-08	835	3/2 SINGLE SOLENOID VALVE THREAD SIZE - 1/4 INCHES
TG2511-06	925	5/2 SINGLE SOLENOID VALVE THREAD SIZE - 1/8 INCHES
TG2521-08	875	5/2 SINGLE SOLENOID VALVE THREAD SIZE - 1/4 INCHES
4V210-08	625	5/2 SINGLE SOLENOID VALVE THREAD SIZE - 1/4 INCHES
TG2522-08	1420	5/2 DOUBLE SOLENOID VALVE THREAD SIZE - 1/4 INCHES
TG2531-10	1050	5/2 SINGLE SOLENOID VALVE THREAD SIZE - 3/8 INCHES
TG2541-15	1820	5/2 SINGLE SOLENOID VALVE THREAD SIZE - 1/2 INCHES
TG2542-15	2815	5/2 DOUBLE SOLENOID VALVE THREAD SIZE - 1/2 INCHES
TG3522-08C	2390	5/3 DOUBLE SOLENOID VALVE CENTER CLOSED THREAD SIZE - 1/4 INCHES
TG3522-08E	2390	5/3 DOUBLE SOLENOID VALVE CENTER EXHAUST THREAD SIZE - 1/4 INCHES
ADV 15 T	2355	AUTO DRAIN VALVE THREAD SIZE - 1/2 INCHES
COIL FOR VALVE	285	FOR TG VALVE

MANIFOLD TG VALVES

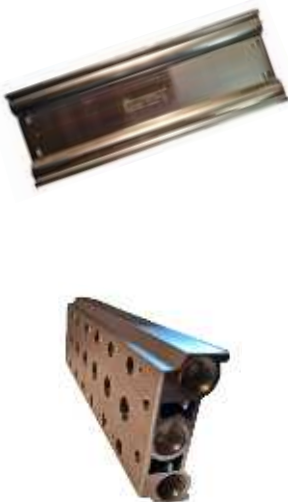

TG200M-2F	320	2 WAY MANIFOLD
TG200M-3F	480	3 WAY MANIFOLD
TG200M-4F	630	4 WAY MANIFOLD
TG200M-5F	790	5 WAY MANIFOLD
TG200M-6F	935	6 WAY MANIFOLD
TG200M-7F	1050	7 WAY MANIFOLD
TG200M-8F	1255	8 WAY MANIFOLD



ITEM CODE	PRICE	DESCRIPTION
AC2010-02L	1765	2 PIECE (FR+L) PORT SIZE - 1/4 INCHES WITH GUARD
AC2010-02	1620	2 PIECE (FR+L) PORT SIZE - 1/4 INCHES WITHOUT GUARD
AC3010-03	2710	2 PIECE (FR+L) PORT SIZE - 3/8 INCHES WITH GUARD
AC4010-04	3455	2 PIECE (FR+L) PORT SIZE - 1/2 INCHES WITH METAL GUARD
AC5010-10	7750	2 PIECE (FR+L) PORT SIZE - 1 INCHES WITH GUARD
AW2000-02	1025	FILTER REGULATOR PORT SIZE - 1/4 INCHES WITHOUT METAL GUARD
AW2000-02L	1375	FILTER REGULATOR PORT SIZE - 1/4 INCHES WITH GUARD
AW3000-03	1465	FILTER REGULATOR PORT SIZE - 3/8 INCHES
AW4000-04	2335	FILTER REGULATOR PORT SIZE - 1/2 INCHES WITH METAL GUARD
AR2000-02	755	AIR REGULATOR PORT SIZE - 1/4 INCHES
AR3000-03	1050	AIR REGULATOR PORT SIZE - 3/8 INCHES
AR4000-04	1325	AIR REGULATOR PORT SIZE - 1/2 INCHES
AF4000-04	1205	AIR FILTER SIZE - 1/2 INCHES
AL4000-04	1295	AIR LUBRICATOR SIZE - 1/2 INCHES
FC4000-04	380	FILTER CARTRIDGE FOR AC4010-04 (40M)
FB4000-04	635	FILTER BOWL FOR AW 4010-04
LB-4000	450	LUBRICATOR BOWL FOR AC4010-04



PRESSURE GUAGE

ITEM CODE	LIST PRICE
G36 - 10 - 01	201
G46 - 10 - 02	215

DIGITAL PRESSURE SWITCH

ITEM CODE	LIST PRICE
DPS-310RX	4050
Mounting for DPS	290

AIR GUN

ITEM CODE	LIST PRICE
EAG-A	125
EAG-BM	365



**Mushroom Push
Button Valve**

**Push Button
Valve**

**Quick
Exhaust Valve**

PRODUCT & DESCRIPTION (SIZE IN INCHES)	MODEL	PRICE
Twist Selector Valve 5/2 x 1/4	MSV86522-TB	935
Mushroom Push Button Valve 5/2 x 1/4	MSV86522-PB	935
Push Button Valve 5/2 x 1/4	MSV86522-PP	935
Roller Lever Valve 5/2 x 1/4	MSV86522-R	935
Twist Selector Valve 3/2 x 1/4	JM-05	825
Mushroom Push Button Valve 3/2 x 1/4	JM-06	825
Push Button Valve 2/2 x 1/4	JM-06A	825
Roller Lever Valve 3/2 x 1/4	JM-07	825
Twist Selector Valve 2/2 x 1/8	MOV-01	510
Roller Lever Valve 2/2 x 1/8	MOV-02	510
Mushroom Push Button Valve 2/2 x 1/8	MOV-03	510
Push Button Valve 2/2 x 1/8	MOV-04	510
Quick Exhaust Valve 1/4	SE-08	438
Quick Exhaust Valve 3/8	SE-10	560
Quick Exhaust Valve 1/2	SE-15	760



COOLANT PIPES

SIZE	LIST PRICE
COOLANT PIPE 1/4" X 1 FEET (FLAT/ROUND)	65
COOLANT PIPE 1/4" X 1.5 FEET (FLAT/ROUND)	99
COOLANT PIPE 3/8" X 1 FEET (FLAT/ROUND)	105
COOLANT PIPE 3/8" X 1.5 FEET (FLAT/ROUND)	158
COOLANT PIPE 1/2" X 1 FEET (FLAT/ROUND)	125
COOLANT PIPE 1/2" X 1.5 FEET (FLAT/ROUND)	188
COOLANT PIPE 1/4" X 2 FEET (ROUND)	140
COOLANT PIPE 3/8" X 2 FEET (ROUND)	220
COOLANT PIPE 1/2" X 2 FEET (ROUND)	240



DOWTY SEAL

SIZE	LIST PRICE
1/4 INCHES	9
3/8 INCHES	10
1/2 INCHES	11
3/4 INCHES	14
1 INCH	20



ALLEN KEY DEAD PLUG WITH COLLAR

SIZE	LIST PRICE
1/8 INCHES	35
1/4 INCHES	43
3/8 INCHES	65
1/2 INCHES	92
3/4 INCHES	105
1 INCH	172





TERMS & CONDITIONS OF SUPPLY

1. All sales, deliveries and services from and by **PV ENGINEERING ASSOCIATES PVT. LTD.** Shall be governed exclusively by the following terms and conditions and at no circumstances there would be any deviations from these conditions.
2. The Quotation which we will send you will be valid for 30 days unless extended by **PV ENGINEERING ASSOCIATES PVT. LTD.** in writing.
3. Price quoted is ex-works, GURGAON. The prices do not include packing, freight charges, insurance and taxes. Government Taxes as applicable at the time of delivery.
4. Freight charges and all other taxes/charges shall be borne by the customer.
5. Prices & terms are subject to change without prior notice. The price prevailing at the time of dispatch will apply.
6. The customer will have to provide road permit applicable in the state of delivery of goods in advance with Purchase order. The customer shall bear losses only in case of not providing the Road permit or any wrong information.
7. **PV ENGINEERING ASSOCIATES PVT. LTD.** Shall not be responsible for penalties of any nature in case of late deliveries.
8. Payment shall be made by the cheque/demand draft payable at Gurgaon. All the bank charges shall be borne by the customer. The amount invoiced has to be paid within the due date as per the agreed credit terms after which an interest at 18% P.A shall be charged.
9. **PV ENGINEERING ASSOCIATES PVT. LTD.** Warrants the equipment sold to be free from defect in material & workmanship. We shall not be obligated however to repair the goods which have been repaired by others, abused, improperly installed, altered or otherwise misused or damaged in any way.
10. The place of jurisdiction for all disputes shall be GURGAON (Haryana).

NOTE: ALL PRODUCTS PICTURES ARE INDICATIVE AND MIGHT DIFFER FROM THE ACTUAL PRODUCT

PER UNIT PRICE IN INR. GOVERNMENT TAXES AS APPLICABLE.



PV Engineering Associates Pvt. Ltd.

 www.conactpneumatics.com

 +91 9999556695, 7042553456



  Follow us



Scan the barcode
for more information.