




Industrial Lubricants & Greases



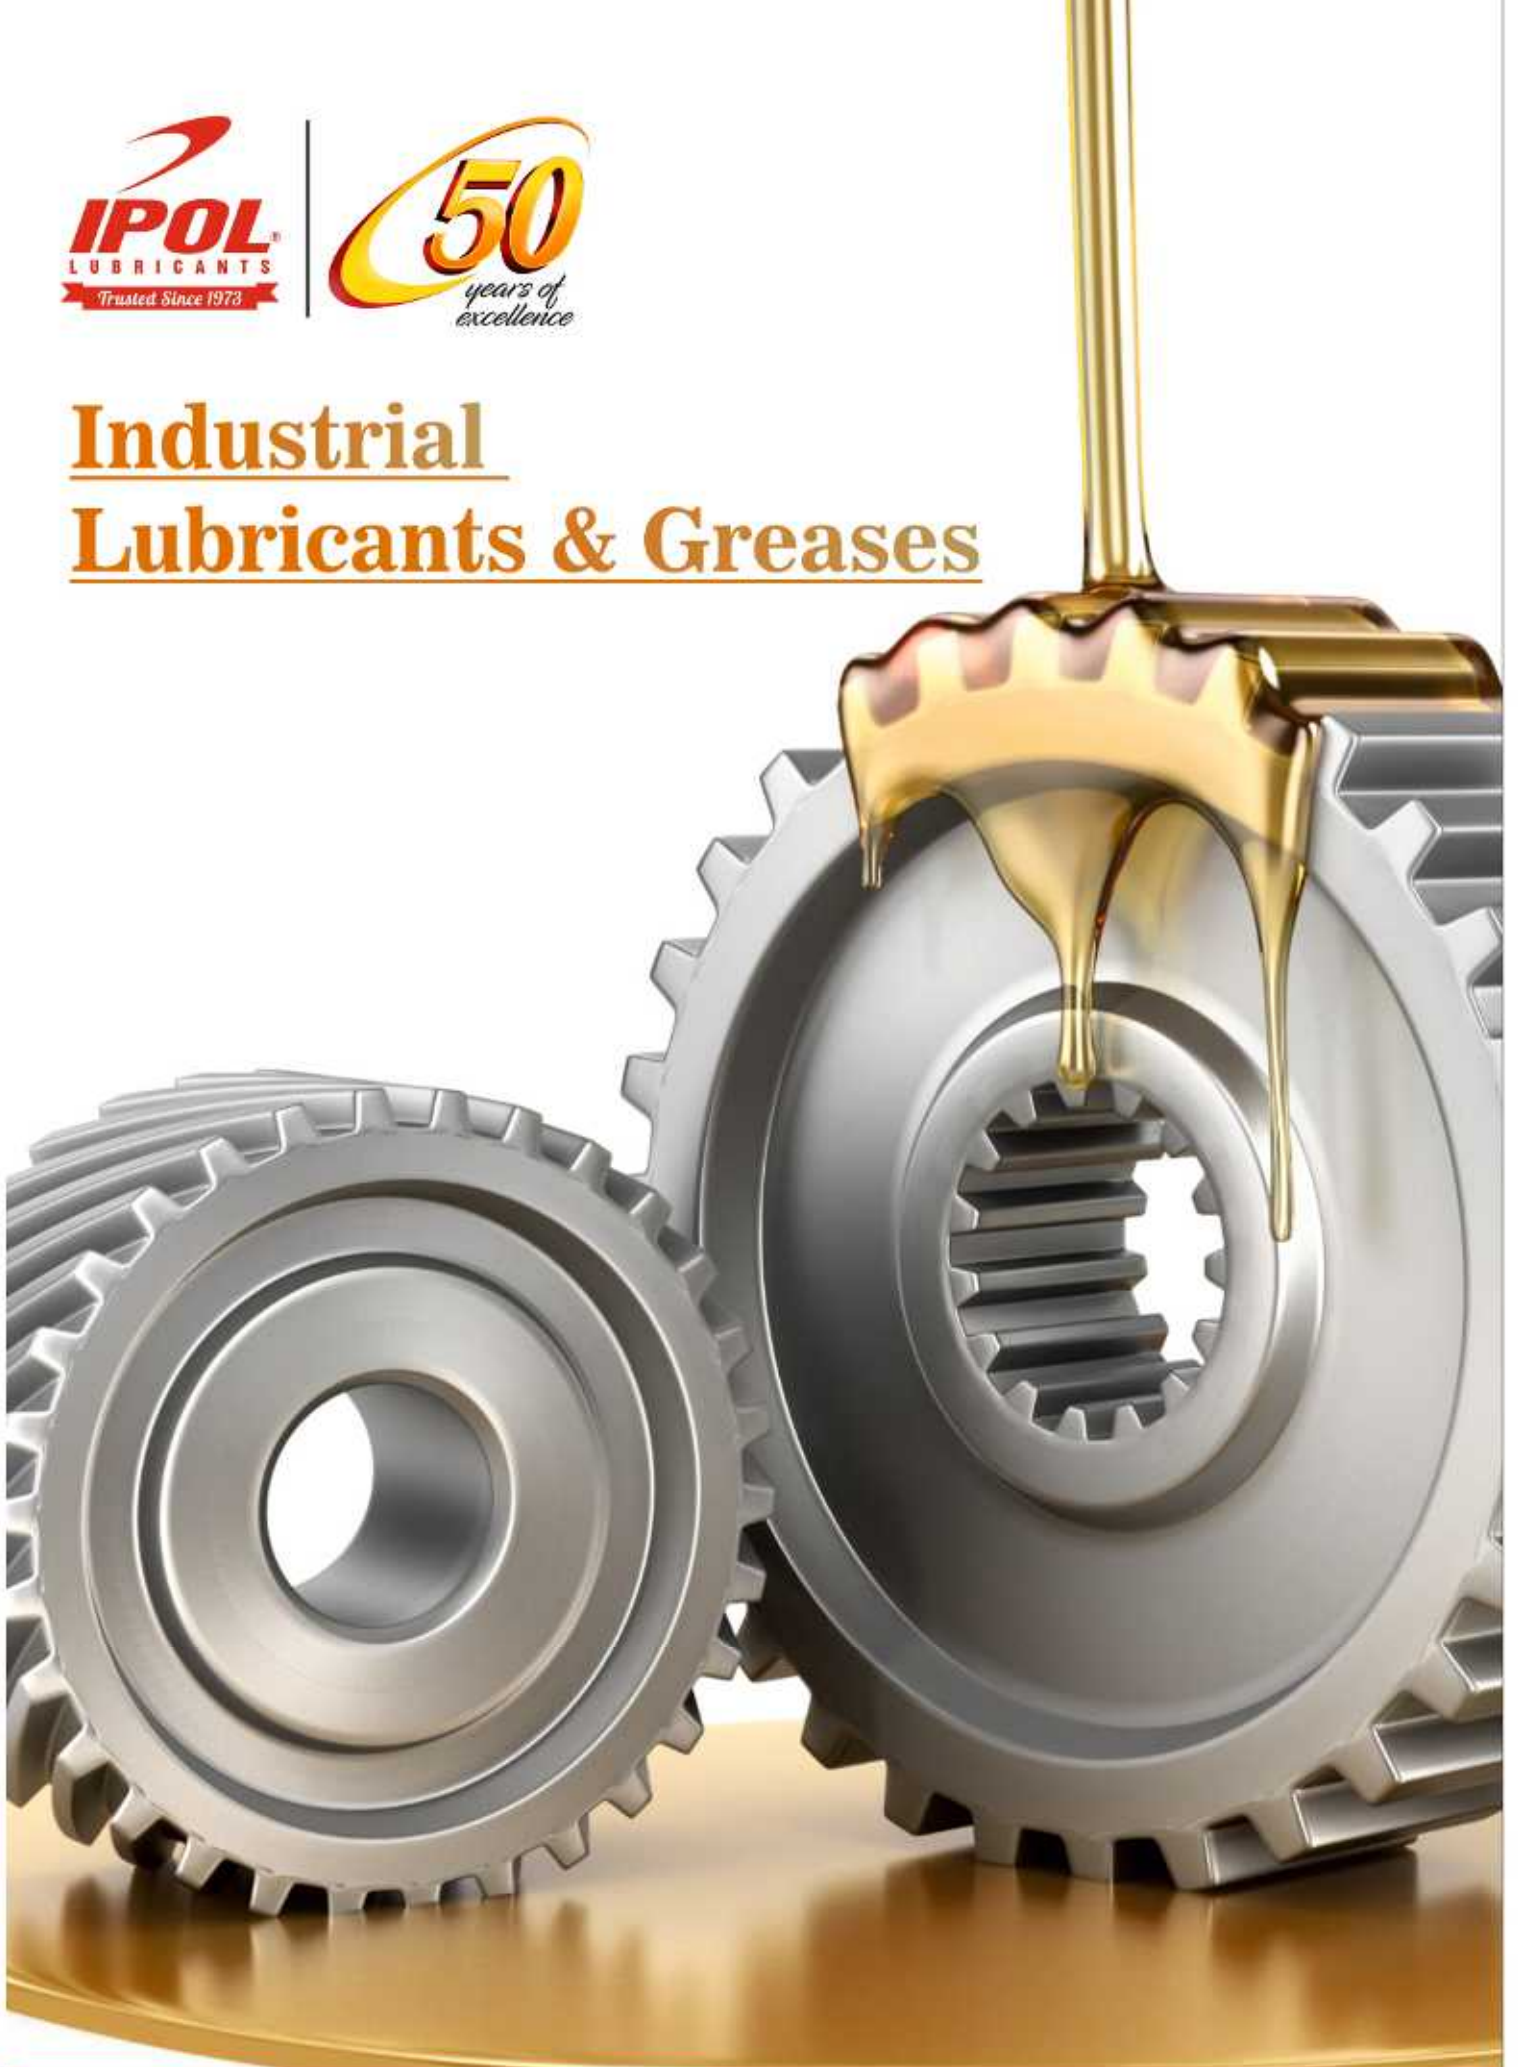

PRODUCT	DESCRIPTION & RECOMMENDATION	VISCOMETRIC / CONSISTENCY	STANDARDS
HYDRAULIC, SLIDE WAY & SPINDLE OILS			
Hydropac AW Oils	High-performance anti-wear hydraulic oils have been accredited with major approvals and are used successfully in most leading industries	ISO VG 32 to 150	- IS 10522 – 1993 (Re-affirmed) - DIN 51524 Part 2 & 3 - Vickers V-104C Vane pump test - Denison HF-0/1/2 - Cincinnati machine P-68/69/70
Hydropac HLP Oils	These are having outstanding thermal stability, high FZG rating & is therefore recommended for use in high pressure hydraulic systems	ISO VG 32 to 150	- IS : 11656 1986 (Re-affirmed) - DIN 51524 Part 2 & 3 - Eaton M-2950-S and I-286-S3 - Bosch Rexroth RE 90220 - Parker (Denison) HF-0/1/2
Hydropac Premium Oils	Manufactured with high viscosity index hydrocracked base-oils suitable for high pressure & temperature systems. Specially recommended for Injection moulding machines & Hydraulic presses for superior results	ISO VG 32 to 100	- IS : 11656 1986 - Eaton M-2950-S and I-286-S3 - Bosch Rexroth RE 90220 - DIN 51524 – Part 2 & 3 - Parker (Denison) HF-0/1/2
Hydrex TH 46/ LTP 100	Extra high viscosity index hydraulic oils specially recommended for it's earthmovers operating under arduous conditions	ISO VG 46 & 100	- IS 11656 – 1986 (Re-affirmed) - DIN 51524 Part 2 & 3 - Tata Hitachi TH 46 & L&T Paclain 100 requirement
Hydropac Premium 46 SC	High Cleanliness level of NAS-6 manufactured with high viscosity index base oils suitable for critical applications	ISO VG 46	-ISO 4406 17/15/12 (NAS-6) - IS : 11656 1986 - Eaton M-2950-S and I-286-S3 - Bosch Rexroth RE 90220 - DIN 51524 – Part 2 & 3 - Parker (Denison) HF-0/1/2
Hydropac Exxel 46 ZF	Equipped with high-quality ashless anti-wear chemistry to provide benefits such as superior performance under extreme conditions	ISO VG 46	- ISO 4406 17/15/12 (NAS 6) - ISO 6748/4 Type HM - DIN 51524 – 2 (HM) - Bosch Rexroth RE 90220 - IS : 11656 1986
Hydropac Super 68 HY	Specially designed for HYVA Hydraulic tipper manufacturer. Formulated with high viscosity index hydrocracked base oil suitable for high pressure & temperature system	ISO VG 68	- IS : 11656 1986 - Eaton M-2950-S and I-286-S3 - Bosch Rexroth RE 90220 - DIN 51524 – Part 2 & 3 - Parker (Denison) HF-0/1/2
Non Drip Oils	Formulated with specially selected base oils and fortified with additives to protect the machine parts from rust and corrosion	ISO VG 32 to 220	Proprietary
Non Drip 68 Plus	Specially formulated to prevent stick-slip problems to ensure good surface finish on the machined part, and to provide quick and effective separation from water and metalworking fluids	ISO VG 68	Cincinnati Machine P-47, P-50, and P-53 way oil Specs. GM LS-2
Spindle Oils	Premium spindle oils designed for high-speed machinery that reduces friction, ensures efficiency, and extends equipment life reliably	ISO VG 2 to 22	IS:493 Part II

INDUSTRIAL & AUTOMOTIVE GEAR OILS & TRANSMISSION OILS

Gear Oil	Lubricants fortified with sulphur-phosphorous EP additives, recommended for all types of Industrial Gear boxes & are designed to bear the heavy shock loads	ISO VG 100 to 680	-IS 8406/93 -AGMA 9005-E02 -Strong FAG FE-8 -David Brown SI.53.101E
Synco EP 80/90/140/ 80W-90	Product developed with proven extreme pressure additive and pour point depressant. Recommended for Hypoid, Spiral, Bevel, Worm gear transmission systems of cars, buses trucks and off high way equipments	SAE 80/90/140	-API GL-4 -IS 1118 : 1992 (EP type GL-4) -MIL-L-2105 -CS 3000 A





PRODUCT	DESCRIPTION & RECOMMENDATION	VISCOMETRIC / CONSISTENCY	STANDARDS
Syncro Premium 80W-90/85W-140	Premium gear oils that have special extreme pressure additives suitable for heavy duty operations in heavy commercial vehicles.	SAE 85 W-140	-API GL-5 -IS 1118 : 1992 (EP type GL-5) -MIL-L-2105 D -CS 3000 B
Syncro TQ-X	Automatic transmission fluid recommended for power steering, synchromesh transmissions and automatic transmissions of cars and commercial vehicles	7 cSt @ 100°C	-General Motors Type 'A', Suffix 'A' -Caterpillar TO-2
Transmission Oil C4 SAE 10W / 30	Automatic transmission fluid recommended for use in on-highway and off-highway Allison heavy duty automatic and power shift transmissions	SAE 10W & SAE 30	- General Motors Allison division specification C4 level - TES 228 - 89

THERMIC FLUIDS

Heat Transfer 550	Paraffinic mineral oil, having higher oxidation & thermal stability, recommended in conventional heat transfer systems	ISO VG 32	Proprietary
Heat Transfer 600	Heat transfer oil specifically formulated with hydro treated base oils and high quality anti-oxidants, recommended for conventional as well as moderate to severe heat transfer systems	ISO VG 32	Proprietary
Heat Transfer 650	Synthetic heat transfer oil fortified with anti-oxidants & other specialty additives, recommended for maximum bulk temperatures up to 320 °C for the most severe applications.	ISO VG 32	Synthetic based

TURBINE OILS

Turbisol 32/46/57/68	Premium quality turbine oils manufactured from specially selected base stocks fortified with anti-oxidant, Metal De-activator, Rust Inhibitor and Anti-foam additives, recommended for lubrication systems of steam, gas & hydro turbines	ISO VG 32 to 68	-DIN 51524-1, 51515-1 -Siemens TLV 9013 04 -General Electric GEK 32568 -Alstom HTGD 90 117 -Fives Cincinnati P-38/54/55/57
----------------------	---	-----------------	--

SUGAR LUB & OPEN GEAR COMPOUND

Sugar Lub /2/3/4 (Bitumen based)	Formulated to withstand the extremely high shock load conditions together with slow speeds encountered by the white metal/gun-metal bearings of sugar mills	Redwood No.2 @100°C 20-40 Sec	Proprietary
Sugar Lub NB (Non bituminous based)	Semi-synthetic non bituminous high viscosity lubricant specially developed to cater the demands of heavily loaded slow rotating journal bearings encountered in sugar mills	ISO VG 750 to 1000	Proprietary
Open Gear compound 1000/2000	Bituminous compounds blended to the right viscosity to provide the necessary film strength and adhesiveness, recommended for slow moving open gear & wire lubrication purpose	Redwood No.2 @100°C 100-120/190-210 sec	Proprietary





PRODUCT	DESCRIPTION & RECOMMENDATION	VISCOMETRIC / CONSISTENCY	STANDARDS
ENGINE OILS			
MGC Diesel Super 20W-40	Heavy duty, multi-grade diesel engine oil manufactured with performance proven additives, recommended for all the general Automotive applications	SAE 20W-40	- API CF/CD/SF - U.S. MIL-L-2104 C - MACK T-7 pass - IS: 13656-2002 Type E-DL 3.
MCF Diesel Ultra 15W-40	Diesel engine oil with quality base stock fortified with a shear stable viscosity index improver, and high performance additives, recommended for all types of heavy commercial vehicles & DG sets	SAE 15W-40	- API CF-4/SF - MB 228.1 - MAN 270 / 271 - MACK (EO-K2) - ACEA E2 - 1906 - Volvo VDS - IS 13656 Type E-DL 5
MCH Diesel XL 15W-40	Premium quality high performance, multi grade diesel engine oil manufactured from high quality base stocks, recommended for all types of advanced diesel engines, ensures enhanced engine performance & longevity	SAE 15W-40	- API CH-4/CG-4/CF/SL - MB 228.3 - MAN M 3275 - MACK EO-M PLUS - Volvo VDS 3 - CUMMINS 20076/77 - ACEA A3/B3-98/E3-96 Issue 2
MCI Diesel X'treme 15W-40	Top-tier, heavy duty, multi grade diesel engine oil. This product is having higher soot holding capacity & therefore can offer the highest drain interval	SAE 15W-40	- API CI-4 Plus / CI-4 / CH-4 CG-4 / CF / SL - MB 228.3 - MAN M 3275 - Volvo VDS 3 - CUMMINS 20076/77/78 - ACEA E7-04; E2-96 - CAT ECF-1A; ECF-2
GREASES			
Iplex Grease 2/3	Premium quality lithium based grease, especially formulated for use in a wide range of general & heavy duty applications in Industries	NLGI 2/3	IS:7623 - 1993
MP Grease 2/3	Premium quality lithium based grease, especially formulated for use in a wide range of automotive applications	NLGI 2/3	IS:12203
Iplex EP 000/00/0/1/2/3	Greases containing extreme pressure additives, recommended for industrial applications where heavy shock loads are encountered	NLGI 000/00/0/1/2/3	IS: 7623 - 1993
Iplex RR3 Grease	Superior quality, multi-purpose grease fortified with many high performance additives. This product is specially developed for wheel bearing of heavy duty vehicles for longer service life	NLGI 3	- IS: 12203 - AAR M 942 - 81
Iplex LC 1/2 Grease	Lithium complex greases with higher shear stability & drop point, recommended for applications where long life and trouble-free performance are key requirements	NLGI 1/2	Proprietary
Iplex LC 300 Grease	Excellent lithium complex grease comprising superior base oils & lithium complex soap developed specially for the slip seal application of rotary kiln of sponge iron plant	NLGI 1.5	Proprietary
Iplex LCM Grease	High temperature, long life, extreme pressure grease fortified with solid lubricants to impart added lubrication properties, provides enhanced lubrication, even when base grease dries up	NLGI 2	Proprietary





PRODUCT	DESCRIPTION & RECOMMENDATION	VISCOMETRIC / CONSISTENCY	STANDARDS
Girth Gear Grease HD1	Premium quality girth gear lubrication grease, especially formulated for lubrication of large open gear pinion pair working from normal to severe mechanical conditions	NLGI 1	Proprietary
Molyplex 30/100/500	Fortified with molybdenum disulphide, recommended for plain and anti-friction bearings, gears as well as in a wide variety of similar sliding applications & can also be used as anti-seize lubricant	NLGI 2	Proprietary
Bentex 2/2M Grease	Bentonite based non-melting type grease recommended for the high temperature applications in conveyor bearing, heat treating, autoclaves, kilns, tunnel ovens & underground mining etc	NLGI 2	Proprietary
HT Grease	Specially designed grease fortified with solid lubricants & additive package to provide lubrication at elevated temperature in Industries & Automotive braking system	NLGI 2	Proprietary
Sugar Mill HVM 30	Excellent complex soap grease recommended for Sugar Mill bearings operating under heavy water contaminations & severe loads	NLGI 1	Proprietary
SG 500/700	Robust lithium complex sealant for rotary kilns in sponge iron industry with having effective film forming ability. Recommended for effective lubrication and sealing of lips seals and shaft in rotary kiln of sponge iron of capacity up to 300 TPD and 500 TPD respectively	NLGI 1.5	Proprietary
IPOL Super CS2 Grease	Calcium Sulphonate complex grease for CCU, Furnace top distribution, hot metal ladles, Mandrel, Plate mill, hot strip maintain space. Low carbon residue, Inherent weld load property, high temperature EHL film, water spray resistance	NLGI 2	Proprietary
IPOL Paint Booth Grease	IPOL Paint Booth Grease is specially formulated water repellent grease, tacky in nature to adhere to the walls of paint booth. It is easily spreadable and can be removed easily with the help of scrubber	NLGI 1.5	Proprietary
Chuck Jaw Paste	Adhesive Paste for Chuck Jaw and Sliding Surfaces Lubricant with light colored appearance. The paste fortified with micronized solid lubricants to provide limited static friction and to maintain adequate clamping/gripping force	NLGI - 2	-Proprietary -Drop Point - 200 Deg -Weld Load - 315 Kg

SPECIALTY OILS

IPOL Refrigeration Oil	Formulated with severely hydro treated naphthenic base stocks for lubrication of reciprocating & rotary refrigeration compressor operating on Ammonia	68	DIN 51503 KAA, KC & KE Standards.
Shock Absorber Oil 32	Heavy duty high performance product blended with specially solvent refined base oils offering excellent performance in all-weather conditions. It Lubricates as well dampens the effect of shocks	32	Proprietary
Mastermix 32	Bright & clear paraffinic oils recommended to be used as dispersing agent & processing aids for polymers	32	Proprietary
Knit Lube 22 Y/W	Premium knitting oil formulated with highly refined base oil & superior additive chemistries with enhanced required properties like water washout, wear resistances, stain proof & lubricating film forming ability	22	Proprietary
IPOL PLG Oil 460 / 1000	Premium lubricant oil specially designed for lubrication of modern plunger operating under high temperature & pressure conditions	460	Proprietary
IPOL Transformer Oil	Highly refined mineral oil that is stable & has excellent electrical insulating properties	27cst at 27°C	Proprietary
RD 100	Specialized lubricant meticulously formulated for rock drill applications. With excellent anti-wear and extreme pressure (EP) properties, it safeguards critical components, ensuring smoother operations	15-40 cSt at 100 °C	Proprietary



One IPOL Multiple Solution



- Mining
- Plastic Industries
- Industrial OEMs
- Engine
- Steel Industries
- Paper Mills
- Power Generation
- Sugar Industries
- Cement Industries
- Auto OEMs
- Sponge Iron Industries
- Infrastructure & Construction
- Auto ancillaries engineering industry



Contact
+91 77100 25705

