


Double Clamp with Internal coolant type for WN\*\* Insert

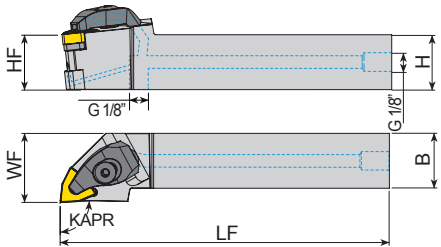

\* 'C' Letter at Last : Optional Clamp Included

: p. 51

Unit: inch

| Series                                   | Designation      | EDP 2700..<br>R L | H (= HF) | B    | WF   | LF  | Insert |
|------------------------------------------|------------------|-------------------|----------|------|------|-----|--------|
| <br><b>DWLNR/L</b><br>Approach angle 95° | DWLNR/L 123B - C | 1571 1572         | .75      | .75  | 1    | 4.5 | WNMG33 |
|                                          | DWLNR/L 124B - C | 1575 1576         | .75      | .75  | 1    | 4.5 | WNMG43 |
|                                          | DWLNR/L 163D - C | 1573 1574         | 1        | 1    | 1.25 | 6   | WNMG33 |
|                                          | DWLNR/L 164D - C | 1577 1578         | 1        | 1    | 1.25 | 6   | WNMG43 |
|                                          | DWLNR/L 204D - C | 1579 1580         | 1.25     | 1.25 | 1.5  | 6   |        |



PARTING & GROOVING

Parting & Grooving Inserts Overview

Parting & Grooving Inserts

Parting & Grooving Holders

| Series | information | Shim         | Shim Screw    | Clamp                    | Clamp Screw   | Spring   | O-RING   | Tork Wrench |
|--------|-------------|--------------|---------------|--------------------------|---------------|----------|----------|-------------|
| DW.3   | Description | YAAWN-SW317  | YAAV-01-M3x10 | YATKH-01-R<br>YATKH-02-L | YAKV-37-MSX18 | YAKY-03  | YAXR-02  | YAAL-02-2.5 |
|        | EDP         | 18000152     | 18000155      | 18000220<br>18000221     | 28000055      | 28000045 | 28000078 | 18000060    |
| DW.4   | Description | YAAWN-3-0001 | YAAV-13-M5x8  | YATKH-01-R<br>YATKH-02-L | YAKV-33-M6X22 | YAKY-01  | YAXR-01  | YAAL-03-3   |
|        | EDP         | 18000151     | 18000163      | 18000220<br>18000221     | 18000222      | 28000044 | 18000223 | 18000061    |

## Parting & Grooving Overview


### Parting & Groove Turn Grades

| Parting and Grooving Grades |                | P Steel |      |     |     | M Stainless steel |      |     |     | K Cast iron |      |     | N Non Ferrous |     | S Super Alloy |      |
|-----------------------------|----------------|---------|------|-----|-----|-------------------|------|-----|-----|-------------|------|-----|---------------|-----|---------------|------|
|                             |                | P10     | P20  | P30 | P40 | M10               | M20  | M30 | M40 | K10         | K20  | K30 | N10           | N20 | S10           | S20  |
| PVD                         | YG602G (YG602) |         | 602G |     |     |                   | 602G |     |     |             | 602G |     |               |     |               | 602G |
|                             | YG603          |         |      |     |     |                   | 603  |     |     |             |      |     |               |     |               |      |

#### YG602G (YG602)

P20 - P35 M20 - M40  
K20 - K40 S15 - S25

PVD - TiAlN




#### Universal grade for Parting & Groove Turn

- Ultra Dense PVD Coating with optimal thermal resistance & strength
- Sub-Micron substrate designed for demanding application
- YG602G : First Choice for Low Cutting Speed, Soft and Sticky Material with Low Hardness (Gold Color)
- YG602 : First Choice for General Application (Violet Color)

#### YG603

M30 - M50

PVD - TiAlN



#### PVD Parting & Grooving Grade for Stainless Steel

- Ultra high toughness substrate and strong adhesion
- Excellent cutting edge strength and chipping resistance
- Stable machinability and tool life for stainless steel

### Parting & Grooving Inserts


| Inserts | TD. Series | 2, 3, 4, 5, 6, 8 |
|---------|------------|------------------|
|         |            |                  |
|         | TD. Series | 2, 3, 4, 5, 6, 8 |

### Parting & Grooving Chipbreakers

|                    |    |  |     |                                                                                                                                                                                  |
|--------------------|----|--|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Parting & Grooving | -P |  | 13° | <ul style="list-style-type: none"> <li>For Parting &amp; Grooving</li> <li>For Low Feed Rate and Difficult to Cut Materials</li> </ul>                                           |
|                    | -N |  | 12° | <ul style="list-style-type: none"> <li>For External Parting And Grooving</li> <li>For General Use</li> </ul>                                                                     |
| Turning & Grooving | -Y |  | 6°  | <ul style="list-style-type: none"> <li>For External Turning &amp; Grooving</li> <li>For Medium feed rate</li> </ul>                                                              |
|                    | GL |  | 18° | <ul style="list-style-type: none"> <li>For External, Internal turning and Grooving</li> <li>Face grooving and Face turning</li> <li>For low feed rate</li> </ul>                 |
|                    | GM |  | 14° | <ul style="list-style-type: none"> <li>For External, Internal turning and Grooving</li> <li>First choice Face Grooving and Face turning</li> <li>For Medium feed rate</li> </ul> |
|                    | RG |  | 15° | <ul style="list-style-type: none"> <li>For External, Internal turning and Grooving</li> <li>Full radius Insert for Profiling</li> </ul>                                          |

## Parting & Grooving Inserts

Recommended Cutting Conditions : p.190



| Series | INSL | CW   | Series | INSL  | CW   |
|--------|------|------|--------|-------|------|
| TD * 2 | .787 | .079 | TD * 5 | .984  | .197 |
| TD * 3 | .787 | .118 | TD * 6 | .984  | .236 |
| TD * 4 | .787 | .157 | TD * 8 | 1.181 | .315 |

\* CDX : Cutting Depth Maximum


● : Stock item ○ : Order made item

| TD.                 | Designation                     | RE (In)         | Parting & Grooving |             | Turning      |    | EDP 5200.. |        |       |
|---------------------|---------------------------------|-----------------|--------------------|-------------|--------------|----|------------|--------|-------|
|                     |                                 |                 | Fn (In/rev.)       | CDX (In)    | Fn (In/rev.) | Ap | YG602      | YG602G | YG603 |
| -P                  | Parting & Grooving (Sharp edge) | TDP 2002        | .008               | .002 ~ .005 | .748         | -  | ●          | ○      | ●     |
|                     |                                 | TDP 3002        | .008               | .002 ~ .006 | .748         | -  | ●          | ○      | ●     |
|                     |                                 | TDP 4003        | .012               | .002 ~ .007 | .748         | -  | ●          | ○      | ●     |
|                     |                                 | TDP5003         | .012               | .002 ~ .008 | .945         | -  | ●          | ○      | ●     |
|                     |                                 | TDP6003         | .012               | .002 ~ .009 | .945         | -  | ●          | ○      | ●     |
| * 6° Angled Parting |                                 | * TDPR 2002 - 6 | .008               | .001 ~ .003 | .748         | -  | ●          | ○      | ●     |
|                     |                                 | * TDPR 3002 - 6 | .008               | .002 ~ .005 | .748         | -  | ●          | ○      | ●     |
|                     |                                 | * TDPL 2002 - 6 | .008               | .001 ~ .003 | .748         | -  | ●          | ○      | ●     |
|                     |                                 | * TDPL 3002 - 6 | .008               | .002 ~ .005 | .748         | -  | ●          | ○      | ●     |
|                     |                                 |                 |                    |             |              |    | ●          | ○      | ●     |
| -N                  | Parting & Grooving (General)    | TDN 2002        | .008               | .002 ~ .007 | .748         | -  | ●          | ○      | ●     |
|                     |                                 | TDN 3002        | .008               | .003 ~ .009 | .748         | -  | ●          | ○      | ●     |
|                     |                                 | TDN 4003        | .012               | .003 ~ .011 | .748         | -  | ●          | ○      | ●     |
|                     |                                 | TDN 5003        | .012               | .004 ~ .014 | .945         | -  | ●          | ○      | ●     |
|                     |                                 | TDN6003         | .012               | .004 ~ .014 | .945         | -  | ●          | ○      | ●     |
| * 6° Angled Parting |                                 | TDN8004         | .016               | .005 ~ .016 | 1.142        | -  | ●          | ○      | ●     |
|                     |                                 | * TDNR 2002 - 6 | .008               | .002 ~ .006 | .748         | -  | ●          | ○      | ●     |
|                     |                                 | * TDNR 3002 - 6 | .008               | .002 ~ .007 | .748         | -  | ●          | ○      | ●     |
|                     |                                 | * TDNL 2002 - 6 | .008               | .002 ~ .006 | .748         | -  | ●          | ○      | ●     |
|                     |                                 | * TDNL 3002 - 6 | .008               | .002 ~ .007 | .748         | -  | ●          | ○      | ●     |
| * 6° Angled Parting |                                 | * TDNL 4003 - 6 | .012               | .002 ~ .009 | .748         | -  | ●          | ○      | ●     |
|                     |                                 |                 |                    |             |              |    | ●          | ○      | ●     |



# Parting & Grooving Inserts

Recommended Cutting Conditions : p.190




\* CDX : Cutting Depth Maximum

● : Stock item ○ : Order made item

| TD.                                                                                 | Designation      | RE<br>(In) | Parting & Grooving |             | Turning         |             | EDP 5200.. |        |       |
|-------------------------------------------------------------------------------------|------------------|------------|--------------------|-------------|-----------------|-------------|------------|--------|-------|
|                                                                                     |                  |            | Fn<br>(In/rev.)    | CDX<br>(In) | Fn<br>(In/rev.) | Ap          | YG602      | YG602G | YG603 |
|    | TDY3E - 0.4      | .016       | .002 ~ .009        | .394        | .005 ~ .009     | .020 ~ .094 | ●          | ○      |       |
|                                                                                     | TDY4E - 0.4      | .016       | .003 ~ .011        | .394        | .006 ~ .012     | .020 ~ .110 | ●          | ○      |       |
|                                                                                     | TDY5E - 0.4      | .016       | .003 ~ .009        | .394        | .006 ~ .012     | .020 ~ .126 | ●          | ○      |       |
|    | TDY2E - 0.3 - GL | .012       | .002 ~ .008        | .394        | .002 ~ .007     | .016 ~ .059 | ●          | ○      |       |
|                                                                                     | TDY3E - 0.3 - GL | .012       | .002 ~ .009        | .394        | .003 ~ .008     | .016 ~ .079 | ●          | ○      |       |
|                                                                                     | TDY4E - 0.4 - GL | .016       | .002 ~ .010        | .394        | .004 ~ .010     | .020 ~ .091 | ●          | ○      |       |
|                                                                                     | TDY5E - 0.4 - GL | .016       | .003 ~ .012        | .492        | .004 ~ .012     | .020 ~ .118 | ●          | ○      |       |
|                                                                                     | TDY6E - 0.4 - GL | .016       | .005 ~ .014        | .492        | .006 ~ .014     | .020 ~ .138 | ●          | ○      |       |
|                                                                                     | TDY8E - 0.8 - GL | .031       | .006 ~ .020        | .591        | .008 ~ .020     | .039 ~ .177 | ●          | ○      |       |
|  | TDY3E - 0.4 - GM | .016       | .002 ~ .009        | .394        | .005 ~ .009     | .020 ~ .094 | ●          | ○      |       |
|                                                                                     | TDY4E - 0.4 - GM | .016       | .003 ~ .011        | .394        | .006 ~ .012     | .020 ~ .110 | ●          | ○      |       |
|                                                                                     | TDY4E - 0.8 - GM | .031       | .004 ~ .011        | .394        | .007 ~ .013     | .031 ~ .110 | ●          | ○      |       |
|                                                                                     | TDY5E - 0.4 - GM | .016       | .003 ~ .011        | .492        | .007 ~ .014     | .020 ~ .118 | ●          | ○      |       |
|                                                                                     | TDY5E - 0.8 - GM | .031       | .004 ~ .011        | .492        | .007 ~ .015     | .031 ~ .118 | ●          | ○      |       |
|                                                                                     | TDY6E - 0.4 - GM | .016       | .005 ~ .012        | .492        | .007 ~ .016     | .031 ~ .142 | ●          | ○      |       |
|                                                                                     | TDY6E - 0.8 - GM | .031       | .005 ~ .014        | .492        | .007 ~ .017     | .039 ~ .142 | ●          | ○      |       |
|                                                                                     | TDY8E - 0.8 - GM | .031       | .004 ~ .010        | .591        | .008 ~ .020     | .039 ~ .177 | ●          | ○      |       |
|                                                                                     | TDY2E - 1.0 - RG | .039       | .002 ~ .006        | .394        | .004 ~ .012     | .004 ~ .031 | ●          | ○      |       |
|                                                                                     | TDY3E - 1.5 - RG | .059       | .003 ~ .007        | .394        | .006 ~ .014     | .004 ~ .047 | ●          | ○      |       |
|  | TDY4E - 2.0 - RG | .079       | .004 ~ .008        | .394        | .007 ~ .018     | .004 ~ .063 | ●          | ○      |       |
|                                                                                     | TDY5E - 2.5 - RG | .098       | .005 ~ .009        | .492        | .008 ~ .020     | .004 ~ .079 | ●          | ○      |       |
|                                                                                     | TDY6E - 3.0 - RG | .118       | .006 ~ .011        | .492        | .010 ~ .024     | .004 ~ .094 | ●          | ○      |       |
|                                                                                     | TDY8E - 4.0 - RG | .157       | .007 ~ .012        | .591        | .010 ~ .028     | .004 ~ .126 | ●          | ○      |       |

# External holders with Internal coolant type

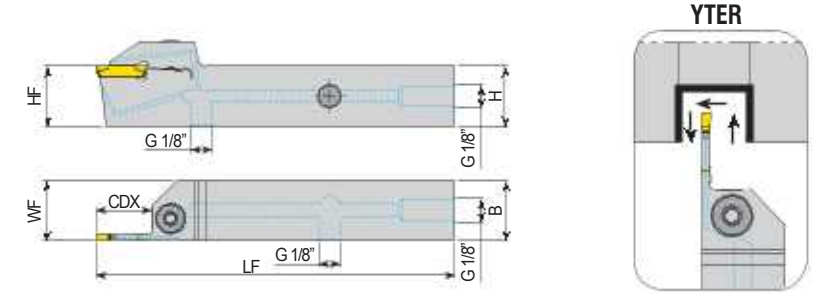


p. 95~96 Unit : inch

| Designation           | EDP 5700..<br>R L | CW   | CDX   | H (= HF) | B     | LF    | Insert |
|-----------------------|-------------------|------|-------|----------|-------|-------|--------|
| YTER/L 08 - 2T059 - C | ● 0261 0238       | .079 | .591  | .500     | 0.500 | 3.937 | TD.2.. |
| YTER/L 10 - 2T059 - C | ● 0264 0241       | .079 | .591  | .625     | 0.625 | 4.921 |        |
| YTER/L 12 - 2T035 - C | ● 0271 0247       | .079 | .354  | .750     | 0.750 | 4.921 |        |
| YTER/L 12 - 2T059 - C | ● 0268 -          | .079 | .591  | .750     | 0.750 | 4.921 |        |
| YTER/L 12 - 2T066 - C | ● 0269 -          | .079 | .669  | .750     | 0.750 | 4.921 |        |
| YTER/L 12 - 2T078 - C | ● 0270 0246       | .079 | .787  | .750     | 0.750 | 4.921 |        |
| YTER/L 16 - 2T066 - C | ● 0275 0251       | .079 | .669  | 1.000    | 1.000 | 5.906 | TD.3.. |
| YTER/L 08 - 3T059 - C | ● 0263 0240       | .118 | .591  | .500     | 0.500 | 3.937 |        |
| YTER/L 10 - 3T059 - C | ● 0266 0243       | .118 | .591  | .625     | 0.625 | 4.921 |        |
| YTER/L 12 - 3T059 - C | ● - 0245          | .118 | .591  | .750     | 0.750 | 4.921 |        |
| YTER/L 12 - 3T078 - C | ● 0272 0248       | .118 | .787  | .750     | 0.750 | 4.921 |        |
| YTER/L 12 - 3T098 - C | ● 0273 0249       | .118 | .984  | .750     | 0.750 | 4.921 |        |
| YTER/L 12 - 3T118 - C | ● 0274 0250       | .118 | 1.181 | .750     | 0.750 | 4.921 |        |
| YTER/L 16 - 3T035 - C | ● 0279 0255       | .118 | .354  | 1.000    | 1.000 | 5.906 |        |
| YTER/L 16 - 3T086 - C | ● 0276 0252       | .118 | .866  | 1.000    | 1.000 | 5.906 |        |
| YTER/L 16 - 3T098 - C | ● 0277 0253       | .118 | .984  | 1.000    | 1.000 | 5.906 |        |
| YTER/L 16 - 3T118 - C | ● 0278 0254       | .118 | 1.181 | 1.000    | 1.000 | 5.906 | TD.4.. |
| YTER/L 20 - 3T098 - C | ● 0284 0259       | .118 | .984  | 1.250    | 1.250 | 6.693 |        |
| YTER/L 16 - 4T086 - C | ● 0280 0256       | .157 | .866  | 1.000    | 1.000 | 5.906 |        |
| YTER/L 16 - 4T098 - C | ● 0281 -          | .157 | .984  | 1.000    | 1.000 | 5.906 | TD.5.. |
| YTER/L 16 - 4T118 - C | ● 0282 0257       | .157 | 1.181 | 1.000    | 1.000 | 5.906 |        |
| YTER/L 16 - 5T098 - C | ● 0283 0258       | .197 | .984  | 1.000    | 1.000 | 5.906 |        |

| Series | Designation | Infomation  | Screw           | Ring       | Wrench                    |
|--------|-------------|-------------|-----------------|------------|---------------------------|
| YTER/L | ..-2..      | Description | Y2505 - M6x30   | YABPL - 01 | YAAL - 03 - 3             |
|        |             | EDP         | 18000199        | 18000058   | 18000061                  |
|        | ..-3..      | Description | Y2004 - M8x1x20 | -          | YAAL - 05 - 4<br>18000062 |
|        |             | EDP         | 18000196        | -          |                           |
|        | ..-4..      | Description | Y2004 - M8x1x20 | -          |                           |
|        |             | EDP         | 18000196        | -          |                           |
|        | ..-5..      | Description | Y2004 - M8x1x20 | -          |                           |
|        |             | EDP         | 18000196        | -          |                           |

External holders with Internal coolant type for Swiss Lathe

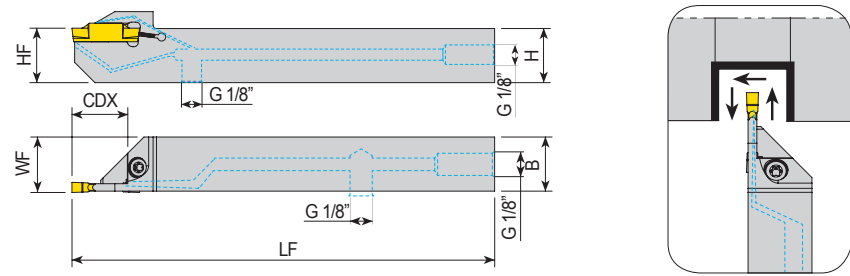


: p. 95~96

Unit : inch

| Designation               |   | EDP 5700..<br>R L | CW   | CDX  | H (= HF) | B    | LF    | Insert |
|---------------------------|---|-------------------|------|------|----------|------|-------|--------|
| YTER/L 08 - 2T047 - S - C | ● | 0260 0237         | .079 | .472 | .500     | .500 | 4.921 | TD.2.. |
| YTER/L 08 - 3T047 - S - C | ● | 0262 0239         | .118 | .472 | .500     | .500 | 4.921 | TD.3.. |
| YTER/L 10 - 2T063 - S - C | ● | 0265 0242         | .079 | .630 | .625     | .625 | 4.921 | TD.2.. |
| YTER/L 10 - 3T063 - S - C | ● | 0267 0244         | .118 | .630 | .625     | .625 | 4.921 | TD.3.. |

| Series | Designation   | Infomation  | Screw       | Ring | Wrench   |
|--------|---------------|-------------|-------------|------|----------|
| YTER/L | ..-2../..-3.. | Description | Y4015-M4x11 | -    | Y80-T15  |
|        |               | EDP         | 18000119    | -    | 18000167 |
|        |               |             |             |      |          |

Internal holders

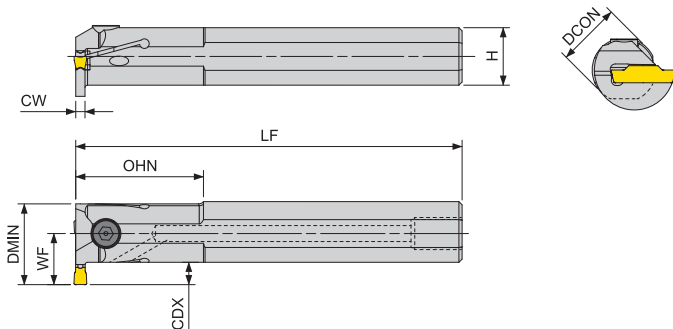

: p. 95~96

Unit : inch

| Designation           |   | EDP 5700..<br>R L | CW   | DMIN  | CDX  | DCON  | H     | OHN   | LF    | Insert |
|-----------------------|---|-------------------|------|-------|------|-------|-------|-------|-------|--------|
| YTIR/L 10 - 2T033 - C | ● | 0289 0285         | .079 | .984  | .335 | .625  | .583  | 1.102 | 5.906 | TD.2.. |
| YTIR/L 12 - 3T023 - C | ● | 0290 0286         | .118 | .984  | .236 | .750  | .720  | 1.575 | 6.693 | TD.3.. |
| YTIR/L 16 - 3T023 - C | ● | 0291 0287         | .118 | .984  | .236 | 1.000 | .906  | 1.575 | 7.874 |        |
| YTIR/L 20 - 3T019 - C | ● | 0292 0288         | .118 | 1.220 | .197 | 1.250 | 1.181 | 2.362 | 9.843 |        |

| Series | Designation         | Infomation  | Screw         | Ring | Wrench            |
|--------|---------------------|-------------|---------------|------|-------------------|
| YTIR/L | 10 - 2T..           | Description | 2503-M4x10    | -    | HL-05<br>58000041 |
|        |                     | EDP         | 18000197      | -    |                   |
|        | 12 - 3T../16 - 3T.. | Description | Y2504-M5X12   | -    |                   |
|        |                     | EDP         | 18000198      | -    |                   |
|        | 20 - 3T..           | Description | Y2004-M8x1x20 | -    |                   |
|        |                     | EDP         | 18000196      | -    |                   |