





PHP Practicum

IS4102

Presentation 06

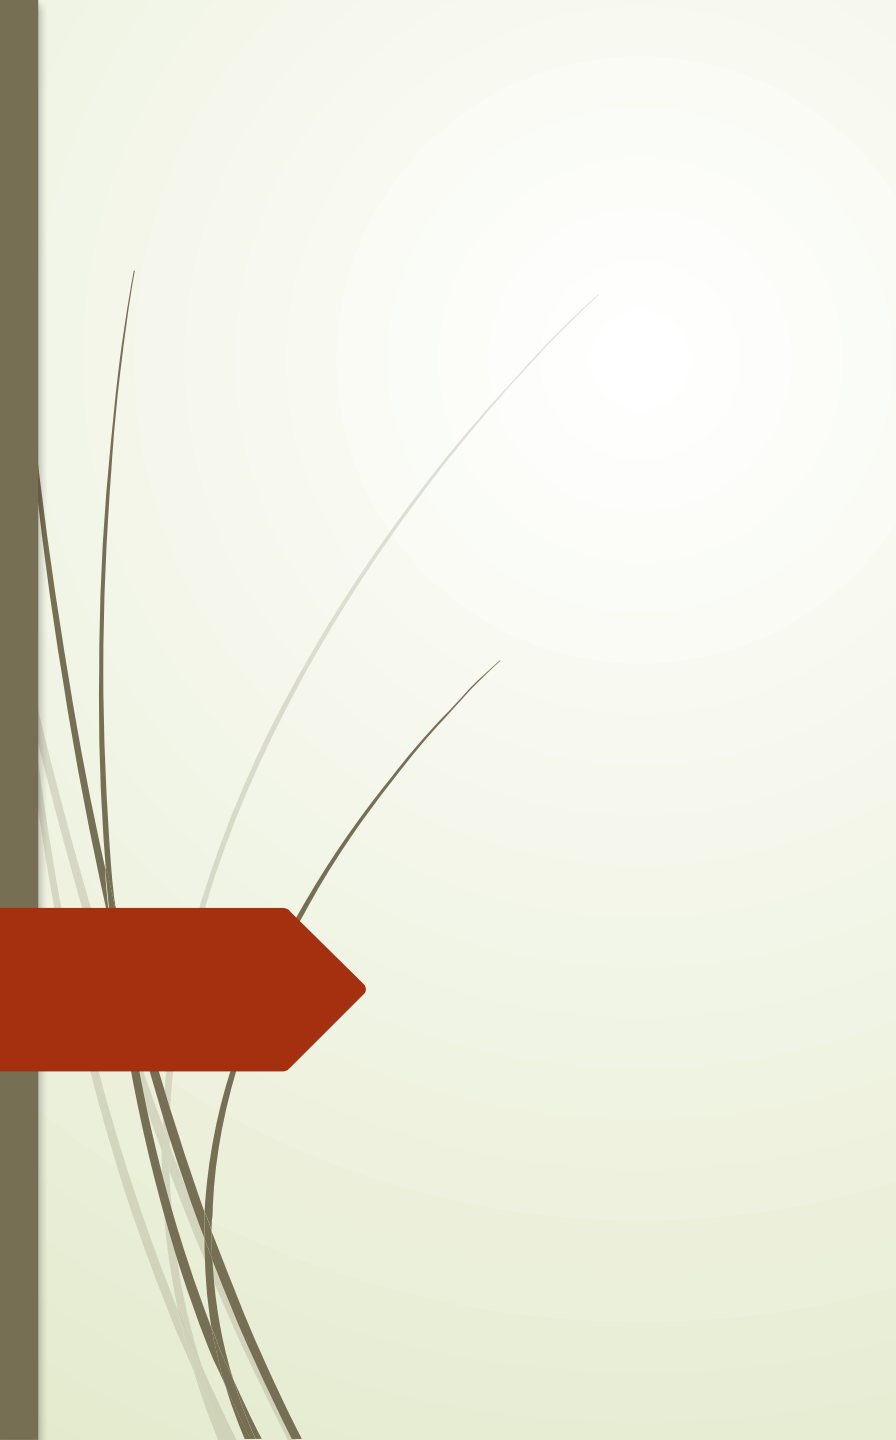


Contents

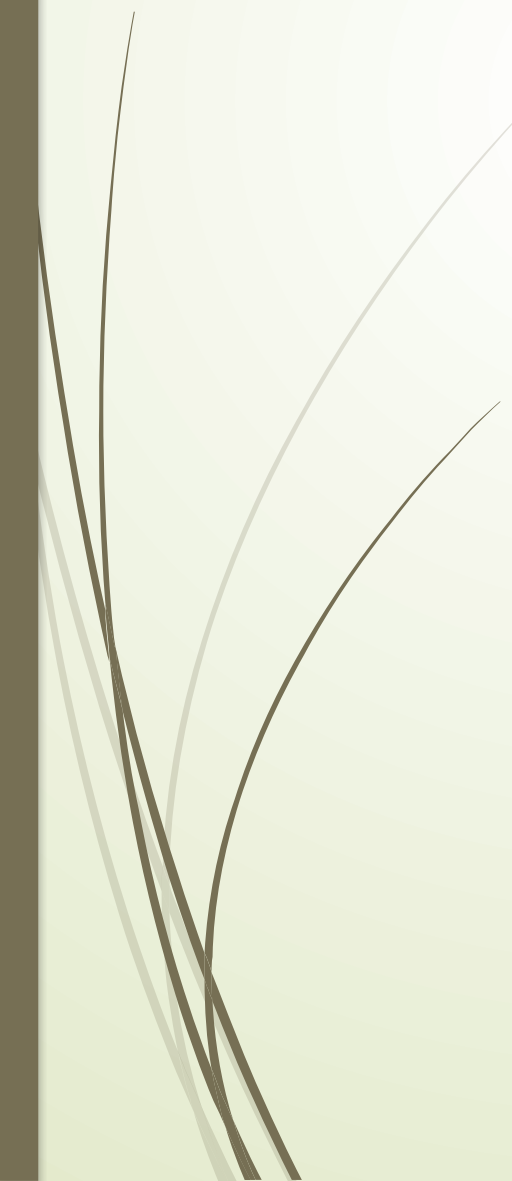- ▢ Creating a Table
 - ▢ Create database connection
 - ▢ Create a html form
 - ▢ Create insert function
 - ▢ Test the insert function
- 

Creating a Table

Fill the table column names with length/values and select the types.

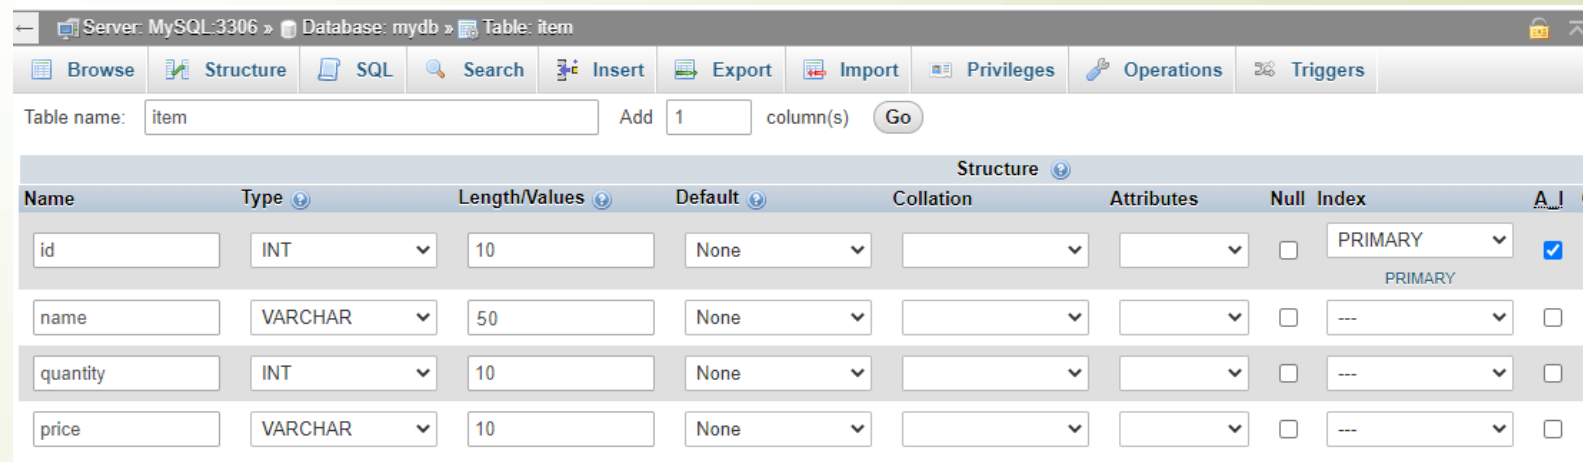


The screenshot shows the MySQL Table Structure dialog for a table named 'item' in the 'mydb' database. The dialog has a toolbar with buttons for Browse, Structure, SQL, Search, Insert, Export, Import, Privileges, Operations, and Triggers. Below the toolbar, the 'Table name' is 'item', and there is an 'Add' button followed by a text box containing '1' and the label 'column(s)', and a 'Go' button. The main area is a table with columns: Name, Type, Length/Values, Default, Collation, Attributes, Null, Index, and A.I. The table contains four rows of column definitions.

Name	Type	Length/Values	Default	Collation	Attributes	Null	Index	A.I.
id	INT	10	None			☐	PRIMARY	☒
name	VARCHAR	50	None			☐	---	☐
quantity	INT	10	None			☐	---	☐
price	VARCHAR	10	None			☐	---	☐

Creating a Table

Structure of Item table.

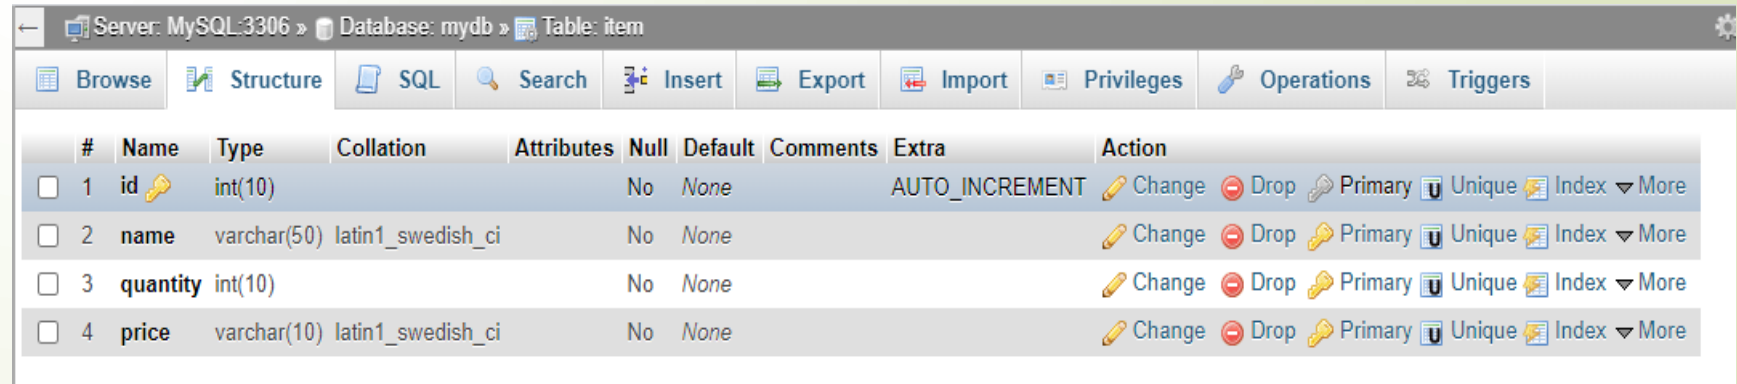

The screenshot shows the MySQL Table Structure window for the 'item' table in the 'mydb' database. The window has a toolbar with buttons for Browse, Structure, SQL, Search, Insert, Export, Import, Privileges, Operations, and Triggers. The table structure is displayed in a table with columns: #, Name, Type, Collation, Attributes, Null, Default, Comments, Extra, and Action. The table has four columns: 'id' (int(10), Primary, Unique, Index), 'name' (varchar(50), latin1_swedish_ci, Primary, Unique, Index), 'quantity' (int(10), Primary, Unique, Index), and 'price' (varchar(10), latin1_swedish_ci, Primary, Unique, Index).

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra	Action
☐ 1	id	int(10)			No	None		AUTO_INCREMENT	Change Drop Primary Unique Index More
☐ 2	name	varchar(50)	latin1_swedish_ci		No	None			Change Drop Primary Unique Index More
☐ 3	quantity	int(10)			No	None			Change Drop Primary Unique Index More
☐ 4	price	varchar(10)	latin1_swedish_ci		No	None			Change Drop Primary Unique Index More

Create a PHP/MySQL Database Connection

```
<?php
$localhost = "127.0.0.1"; //use this Ip address or 'localhost'
$username = "root"; //database user name, default username is root
$password = ""; //if you use database password, enter password here.
$dbname = "mydb"; //your database name

$connect = new mysqli($localhost, $username, $password, $dbname);

if ($connect->connect_error) {
    die("Connection Failed : " . $connect->connect_error);
}

else {
    echo "Successfully Connected";
}
?>
```

- ❑ Save this file under the **htdocs** folder (**C/xampp/htdocs**) name should be **dbconnection.php**




Create a html form

- We need to create a form for gathering information.
- Item table collects three inputs by users and stores the database.
- There are item name, quantity, and price.



form.php

```
<!DOCTYPE html>
<html lang="en">
<meta charset="UTF-8">
<title>Insert function</title>
<link rel="stylesheet" href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/css/bootstrap.css">
<body>
<div class="wrapper">
<div class="container-fluid">
<div class="row">
<div class="col-md-12">
<div class="page-header">
<h2>PHP/MySQL Insert function</h2>
</div>
```

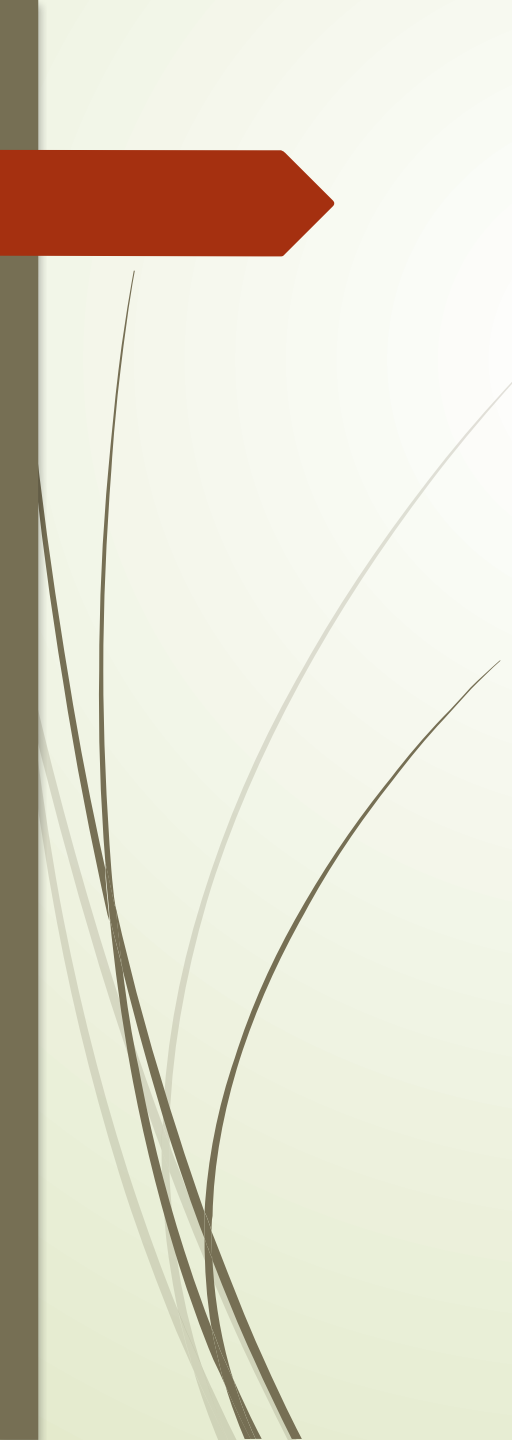

```
<form action="insert_function.php" method="post" enctype="multipart/form-data">
<div class="form-group">
<label for="name">Item Name</label>
<input type="text" name="name" value="" class="form-control" placeholder="Ex: Apple" required>
</div>
<div class="form-group">
<label for="quantity">Item Quantity</label>
<input type="int" name="quantity" value="" class="form-control" placeholder="5" required>
</div>
<div class="form-group">
<label for="price">Item Price</label>
<input type="text" name="price" value="" class="form-control" placeholder="50.00" required>
</div>
<br>
<div class="form-group">
<input type="submit" class="btn btn-primary" value="Submit">
</div>
</form>
</div>
</div>
</div>
</body>
</html>
```




insert_function.php


```
<?php

require_once "dbconnection.php";
$name   = $_POST['name'];
$quantity = $_POST['quantity'];
$price  = $_POST['price'];
$sql = "INSERT INTO item (name, quantity, price) VALUES
('$name','$quantity','$price')";
$result= mysqli_query($connect,$sql);
if($result){
    header("Location: form.php");
}
else{
    echo "Data Storing is fail";
}

?>
```



Test the PHP insert function

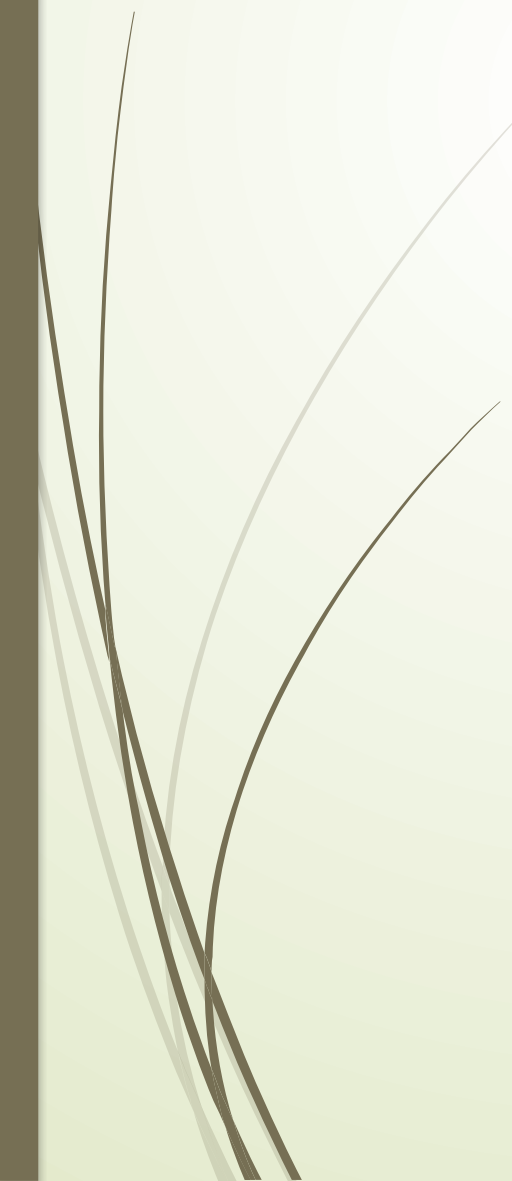- ❑ Open your web browser, type localhost/form.php in the URL and press the enter key.
 - ❑ Then enter the sample details of item.
 - ❑ Check the database item table.
- 



Thank you!