


BATTERIJ 3S: XT60, ZEKERING, SCHAKELAAR, STROOMMETING

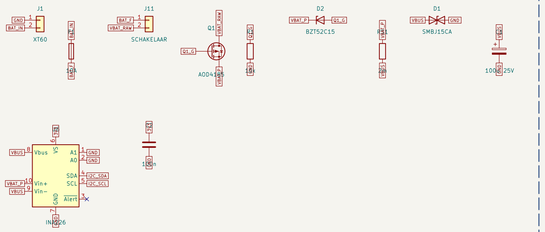


BUCK 5 V 5 A (ESP32, SERVO, LICHTEN)

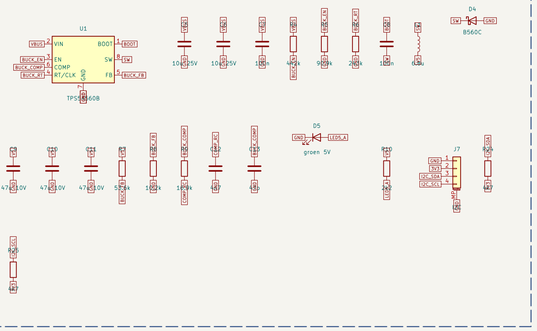


ESC (BRUSHLESS)



AANSLUITINGEN

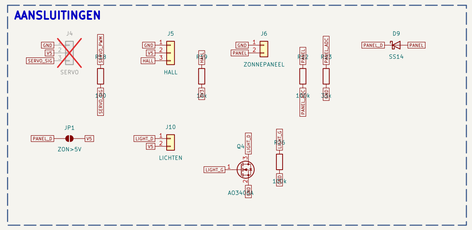


ELRS-ONTVANGER (ESP32-C3 + SX1280)

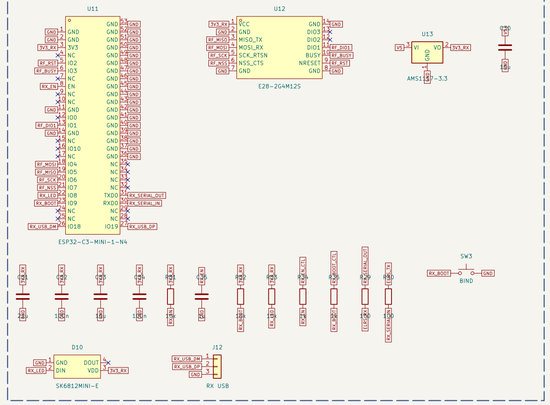


BEVESTIGING




3,3 V (ESP32 + INA226)



ESP32-S3

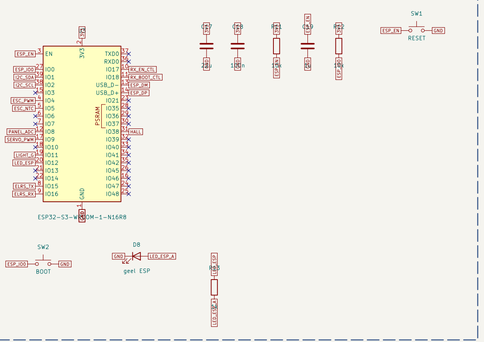

USB-C (FLASHEN / DEBUG VAN BUITENAF)

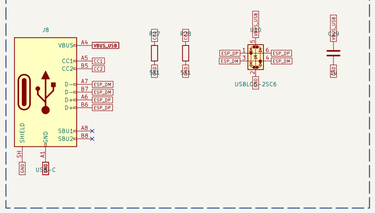

SC-02 DRIVE BOARD v3.0 – compact board on M3 standoffs (battery on top): ESP32-S3 + brushless ESC output + INA226 + 5 V 5 A buck + built-in ExpressLRS receiver (generated by tools/build_sch.py from tools/design.py)
Battery: XT60 -> 10 A fuse -> power switch pads -> P-MOSFET reverse protection -> 2 mOhm shunt (INA226 0x40) -> VBUS: motors + buck.
Motor: one brushless 2435 4500KV on a 40 A ESC (battery via Y-cable, not through this board). ESC signal IO4 (100 R). ESC/motor NTC IO5 (10k divider). Servo IO9 (100 R), hall IO38 (10k pull-up), lights IO11 (AO3400A), solar panel JST-XH, ADC IO8 (100k/33k). JP1 = panel -> 5 V.
ELRS: ESP32-C3-MINI-1 + E28-2G4M12S (SX1280) wired as ExpressLRS "Generic C3 2400" (SCK 6, MOSI 4, MISO 5, NSS 7, BUSY 3, DIO1 1, RST 2, LED 8, button 9). CRSF: C3 TX21 -> S3 IO16, S3 IO15 -> C3 RX20.
S3 IO17 -> C3 EN (reset), S3 IO18 -> C3 IO9 (bootloader). First flash of the C3: USB pads RX USB (D-, D+, GND) or WiFi. Bind: BIND button (C3 IO9).

drive board v3: ESP32-S3 + ESC output + ELRS + INA226 + buck
Kobe Van Robaeys
Sheet: /
File: sc02_drive.kicad_sch
Title: SC-02 floor board
Size: A1 | Date: 2026-10-18 | **Rev: 2.0**
KiCad E.D.A. 10.0.3 | Id: 1/1