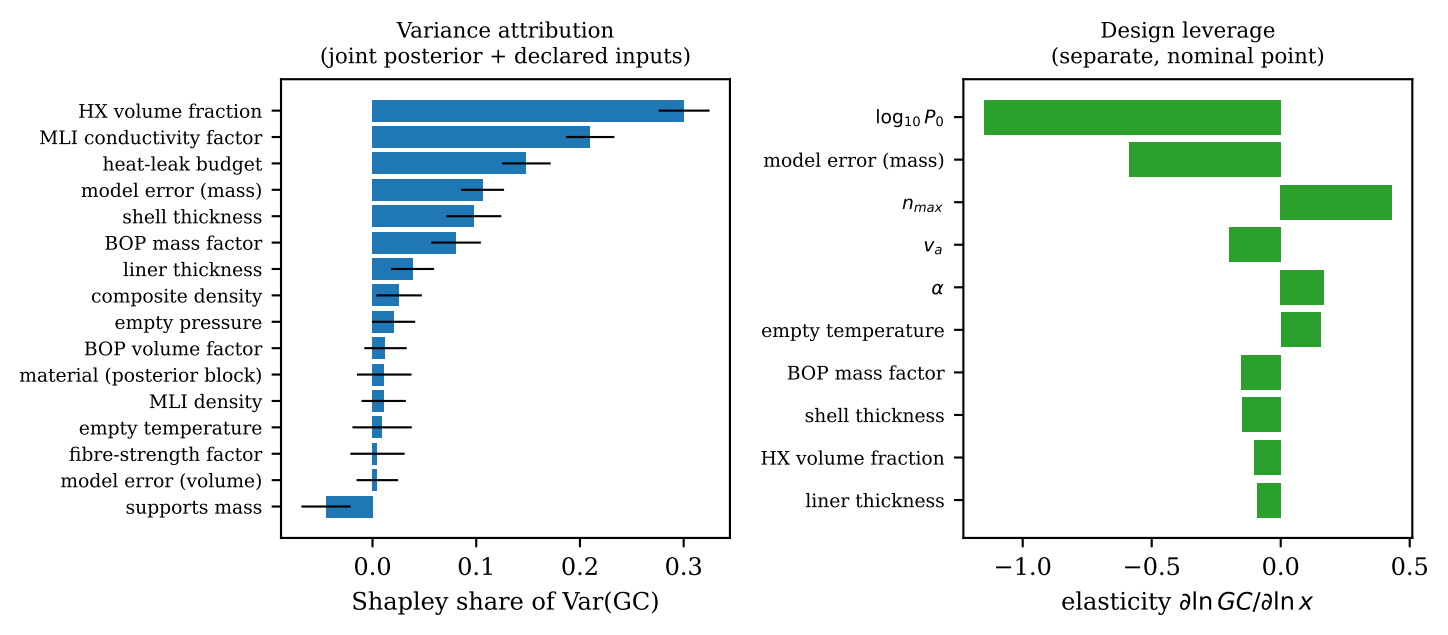
Variance attribution
(joint posterior + declared inputs)
HX volume fraction
MLI conductivity factor
heat-leak budget
model error (mass)
shell thickness
BOP mass factor
liner thickness
composite density
empty pressure
BOP volume factor
material (posterior block)
MLI density
empty temperature
fibre-strength factor
model error (volume)
supports mass
0.0
0.1
0.2
0.3
Shapley share of Var(GC)
Design leverage
(separate, nominal point)
$\log_{10} P_0$
model error (mass)
$n_{max}$
$v_a$
$\alpha$
empty temperature
BOP mass factor
shell thickness
HX volume fraction
liner thickness
−1.0
−0.5
0.0
0.5
elasticity $\partial \ln GC / \partial \ln x$