


BATTERIJ 3S: XT60, ZEKERING, SCHAKELAAR, STROOMMETING

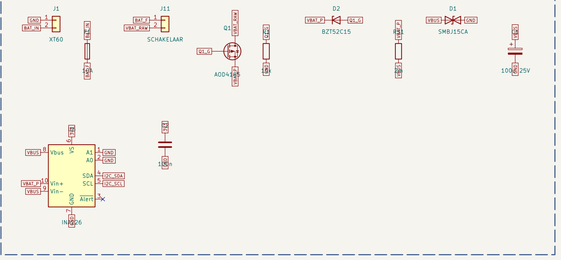


BUCK 5 V 5 A (ESP32, SERVO, LICHTEN)

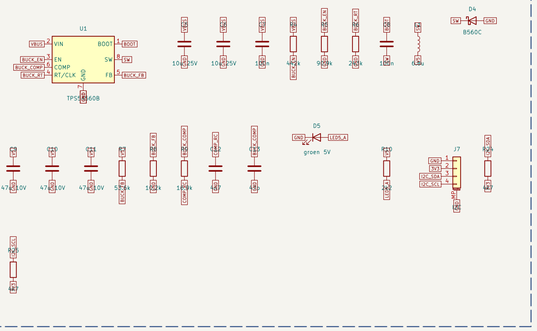


MOTOR 1 (DRV8871)




MOTOR 2 (DRV8871)




3.3 V (ESP32 + INA226)

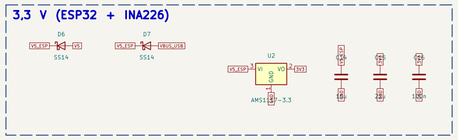


ESP32-S3

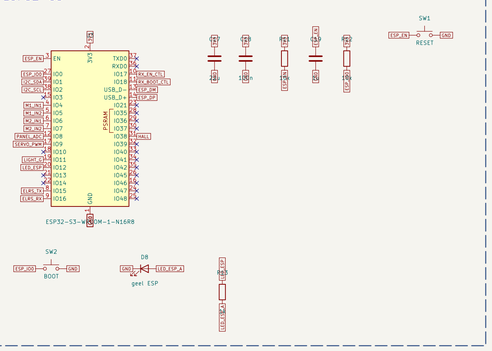


USB-C (FLASHEN / DEBUG VAN BUITENAF)

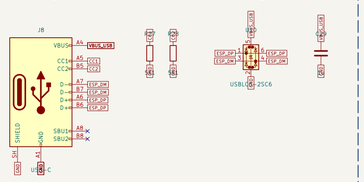

AANSLUITINGEN

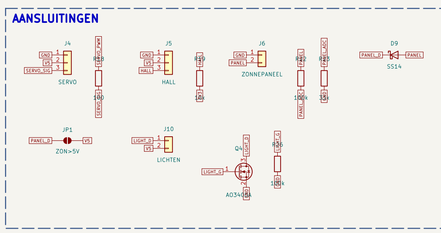

ELRS-ONTVANGER (ESP32-C3 + SX1280)

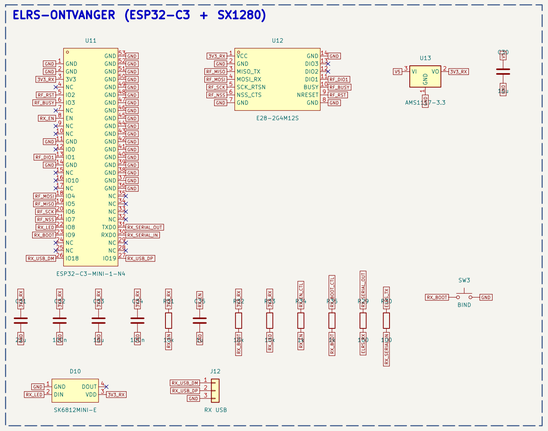

BEVESTIGING



SC-02 DRIVE BOARD v3.0 — compact board on M3 standoffs (battery on top): ESP32-S3 + 2x DRV8871 + INA226 + 5 V 5 A buck + built-in ExpressLRS receiver (generated by tools/build_sch.py from tools/design.py)
Battery: XT60 -> 10 A fuse -> power switch pads -> P-MOSFET reverse protection -> 2 mOhm shunt (INA226 0x40) -> VBUS: motors + buck.
Motors: DRV8871 IN1/IN2 (M1: IO4/IO5, M2: IO6/IO7), limit 64/184 = 3.55 A. Servo IO9 (100 R), hall IO38 (10k pull-up), lights IO11 (AO3400A), solar panel JST-XH, ADC IO8 (100k/33k), JP1 = panel -> 5 V.
ELRS: ESP32-C3-MINI-1 + E28-2G4M12S (SX1280) wired as ExpressLRS "Generic C3 2400" (SCK 6, MOSI 4, MISO 5, NSS 7, BUSY 3, DIO1 1, RST 2, LED 8, button 9). CRSF: C3 TX21 -> S3 IO16, S3 IO15 -> C3 RX20.
S3 IO17 -> C3 EN (reset), S3 IO18 -> C3 IO9 (bootloader). First flash of the C3: USB pads RX USB (D-, D+, GND) or WiFi. Bind: BIND button (C3 IO9).

whole car floor = PCB: ESP32-S3 + 2x DRV8871 + INA226 + buck
Kobe Van Robaeys
Sheet: /
File: sc02_drive.kicad_sch
Title: SC-02 floor board
Size: A1 | Date: 2026-10-18 | Rev: 2.0
KiCad E.D.A. 10.0.3 | Id: 1/1