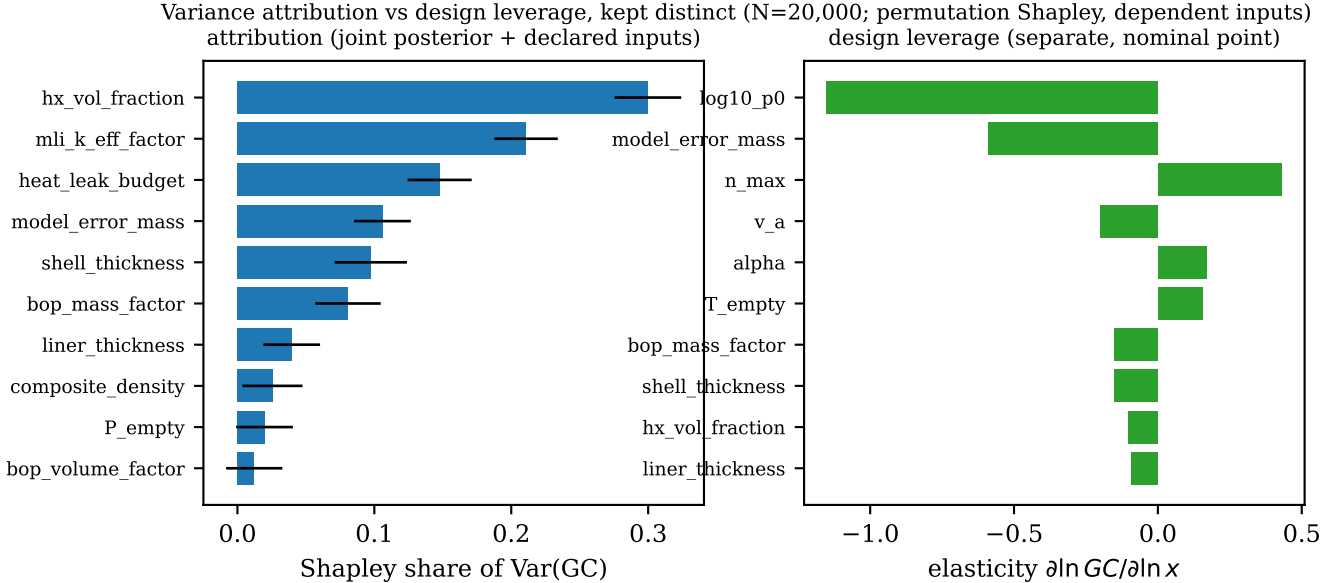
Variance attribution vs design leverage, kept distinct (N=20,000; permutation Shapley, dependent inputs)
attribution (joint posterior + declared inputs)
design leverage (separate, nominal point)
hx_vol_fraction
mli_k_eff_factor
heat_leak_budget
model_error_mass
shell_thickness
bop_mass_factor
liner_thickness
composite_density
P_empty
bop_volume_factor
0.0
0.1
0.2
0.3
Shapley share of Var(GC)
log10_p0
model_error_mass
n_max
v_a
alpha
T_empty
bop_mass_factor
shell_thickness
hx_vol_fraction
liner_thickness
−1.0
−0.5
0.0
0.5
elasticity ∂ln GC/∂ln x