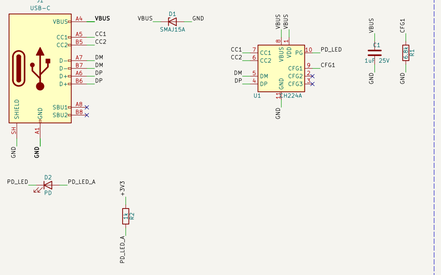
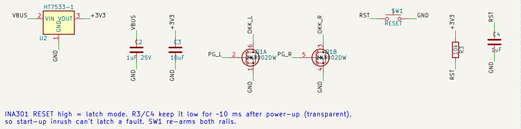
## USB-C PD input



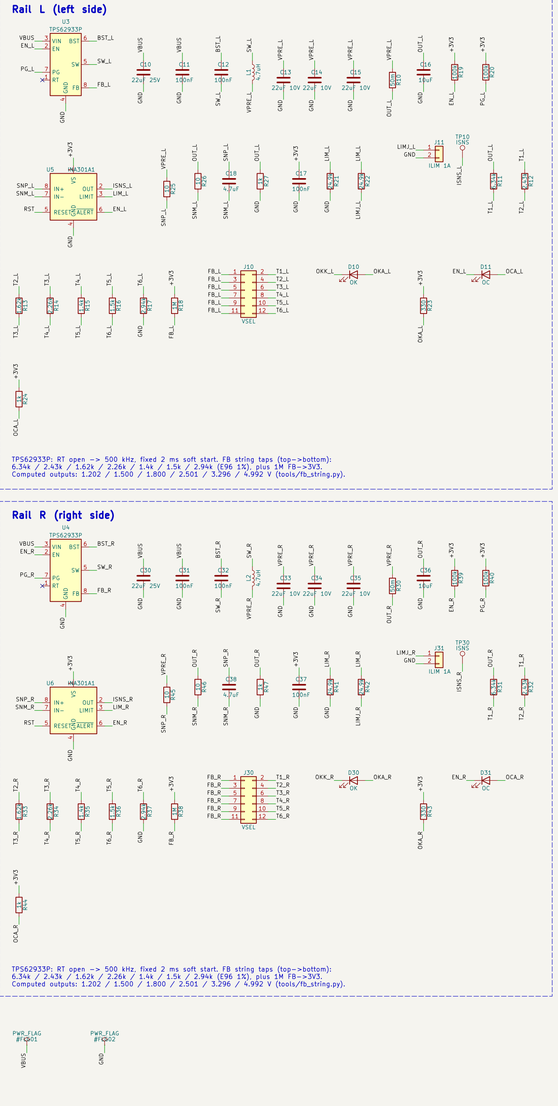

CH224A: VHV (pin 1) and VBUS (pin 8) tied straight to VBUS, CFG2/CFG3 open.
6.8k on CFG1 requests 9 V: a 5 V–only source still works (5 V rail then ~4.8 V).

## 3V3 housekeeping





INA301 RESET high = latch mode. R3/C4 keep it low for ~10 ms after power-up (transparent).
so start-up inrush can't latch a fault. SW1 re-arms both rails.

## Rail L (left side)




TPS62933P: RT open -> 500 kHz, fixed 2 ms soft start. FB string taps (top->bottom):
6.34k / 2.43k / 1.62k / 2.26k / 1.4k / 1.5k / 2.94k (E96 1%), plus 1M FB->3V3.
Computed outputs: 1.202 / 1.500 / 1.800 / 2.501 / 3.296 / 4.992 V (tools/fb_string.py).

## Outputs




Rail pins: two 2-pin headers per side, 5 holes apart along the rail, for MB102-style
breadboards (inner rail 0.85" / outer rail 0.95" from centre). Order GND, + on both sides.

## Rail R (right side)




TPS62933P: RT open -> 500 kHz, fixed 2 ms soft start. FB string taps (top->bottom):
6.34k / 2.43k / 1.62k / 2.26k / 1.4k / 1.5k / 2.94k (E96 1%), plus 1M FB->3V3.
Computed outputs: 1.202 / 1.500 / 1.800 / 2.501 / 3.296 / 4.992 V (tools/fb_string.py).




Rail pins: 2x2 pins per side, 5 holes apart; GND, + on both sides
INA301 latching overcurrent per rail (1 A, or 2 A with ILIM jumper removed)
USB-C PD (CH224A, 9 V request) -> 2x TPS62933P, jumper-selected 1.2/1.5/1.8/2.5/3.3/5.0 V

| | |
|---|---|
| Sheet: / | |
| File: mypsu.kicad_sch | |
| **Title: MultiVolt PSU — USB-C PD breadboard supply** | |
| Size: A1 | Date: 2026-10-31 |
| KiCad E.D.A. 10.0.3 | Id: 1/1 |